

## General Description

The SDC1576 is an integrated Hall sensor with H-bridged output driver designed for brushless DC motor applications. The IC includes high sensitivity hall sensor, chopper stabilized amplifier, dynamic offset cancellation, thermal protection and active reverse battery protection. The high sensitivity of Hall-effect sensor is suitable for motors from mini-type CPU coolers to blowers and DC fans. Typical operation current is 300mA and operating voltage range is wide.

## Features

- One-chip Hall Sensor
- Wide operating voltage range: 3.2V~18V
- Output current: 300mA(Continuous)
- Output thermal shutdown protection
- Lock protection and auto-restart
- Active reverse battery protection

## Applications

- Single Phase BLDC Fans
- Single Phase BLDC Motors

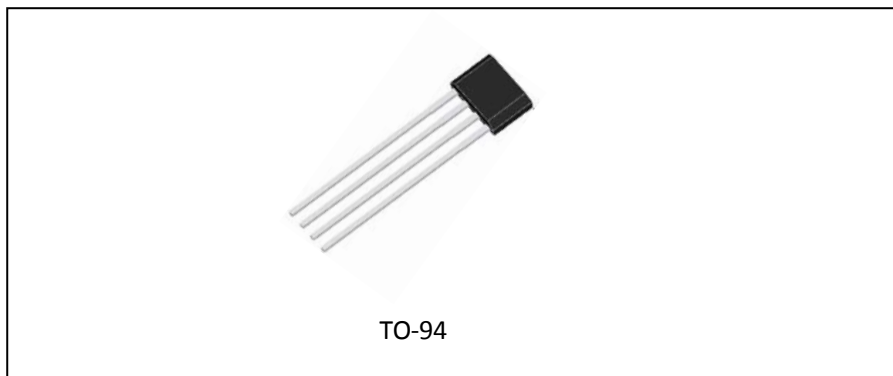


Figure 1. Package Type

### Pin Configuration

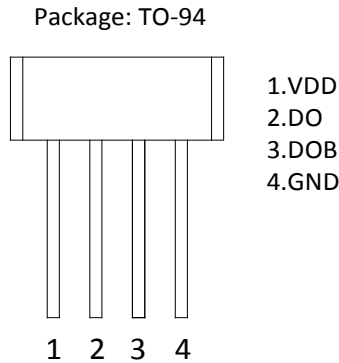


Figure 2. Pin Configuration

Pin Number	Pin Name	Function
1	VDD	Supply voltage pin
2	DO	Output pin
3	DOB	Output pin
4	GND	Ground pin

Table1. Pin Description

### Functional Block Diagram

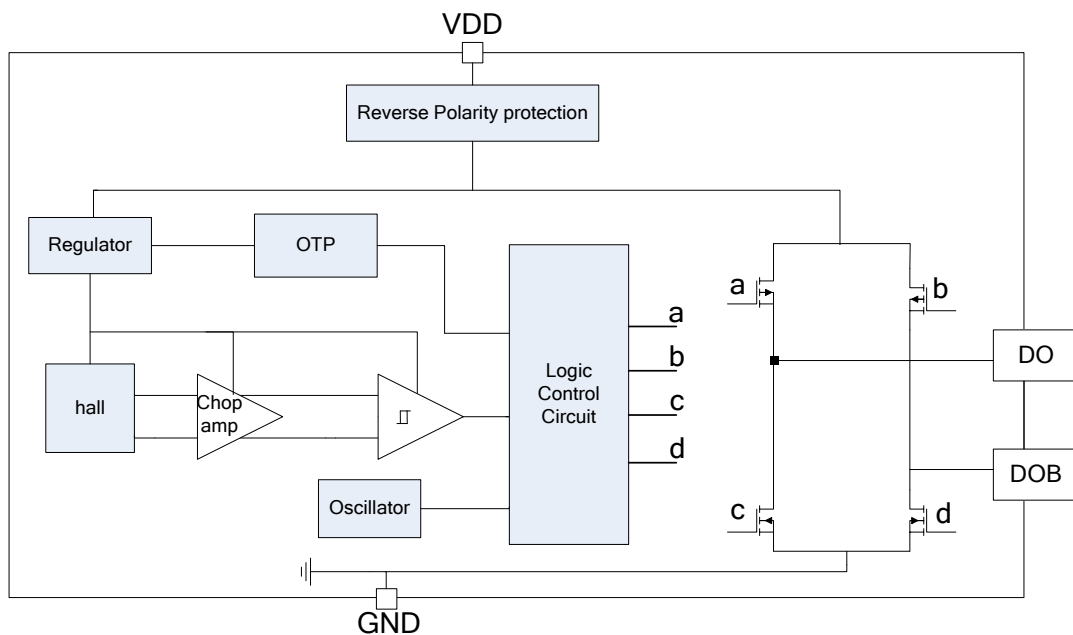
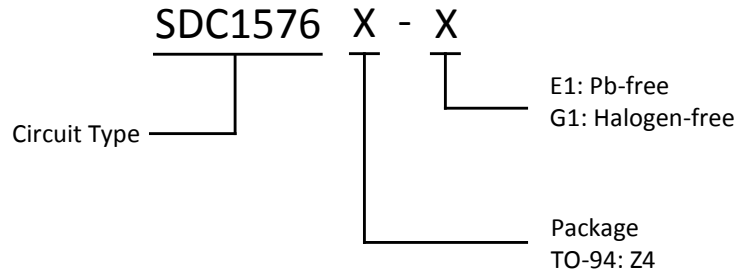


Figure 3. Functional Block Diagram

**Ordering Information**


Package	Temperature Range	Part Number		Marking ID		Packing Type
		Pb-free	Halogen-free	Pb-free	Halogen-free	
TO-94	-40°C~85°C	SDC1576Z4-E1	SDC1576Z4-G1	1576	1576G	Bulk

**Absolute Maximum Ratings** (Note: Stresses greater than those listed under absolute maximum ratings may cause permanent damage to the device.)

Parameter		Symbol	Value	Units
Supply Voltage		$V_{DD}$	20	V
Output Voltage		$V_{OUT}$	20	V
Output current	Continuous	$I_{OUT}$	300	mA
	Hold		500	
	Peak		700	
Package power dissipation		$P_D$	550	mW
Storage temperature range		$T_S$	-65 to 150	°C
Maximum junction temperature		$T_J$	150	°C
ESD, HBM model per Mil-Std-883, Method 3015		HBM	4000	V
ESD, MM model per JEDEC EIA/JESD22-A115		MM	400	V
Latch-up test per JEDEC 78		-	200	mA

Table 2. Absolute Maximum Ratings

### Recommended Operating Conditions

Parameter	Symbol	Min	Max	Unit
Power supply	$V_{DD}$	3.2	18	V
Operation temperature	$T_a$	-40	85	°C

Table 3. Recommended Operating Conditions

**Electrical Characteristics** ( $T_a=25^\circ\text{C}$ ,  $V_{DD}=12\text{V}$ , unless otherwise specified)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Supply voltage	$V_{DD}$	-	3.2	-	18	V
Quiescent supply current	$I_{DD}$	other pins are open	-	2	-	mA
Output saturation voltage	$V_{SAT}$ (sink)	$I_O=200\text{mA}$	-	0.3	-	V
	$V_{SAT}$ (drive)	$I_O=200\text{mA}$	-	0.6	-	V
Lock detection on time	$T_{on}$	-	-	0.4	-	S
Lock detection off time	$T_{off}$	-	-	2.8	-	S
Over temperature shutdown threshold	$T_a$	-	-	160	-	°C
Over temperature shutdown hysteresis	$T_a$	-	-	20	-	°C

Table 4. Electrical Characteristics

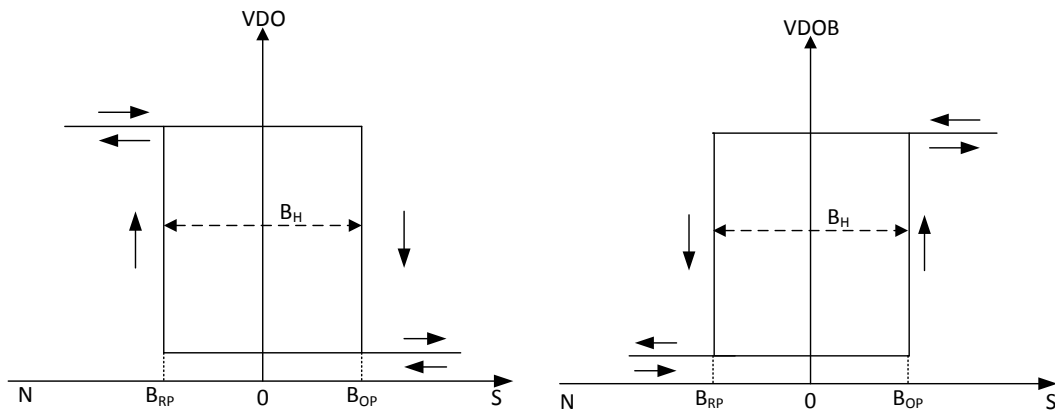
**Magnetic Characteristics** ( $V_{DD}=12V$ , unless otherwise specified)


Figure 4. Magnetic Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Magnetic operate point	$B_{OP}$	10	20	30	GS
Magnetic release point	$B_{RP}$	-30	-20	-10	GS
Magnetic hysteresis	$B_{hys}$	30	40	50	GS

Table 5. Magnetic Characteristics

### Function Description

The figure below is the circuit diagram of H-bridge transistors. The single-phase motor rotation depends on a switching current of coil L1. When the magnetic pole is N pole, Q2, Q3 are turn-off and Q1, Q4 are turn-on, L1 has a current from DO to DOB. And when the magnetic pole is S pole, Q1, Q4 are turn-off and Q2, Q3 are turn-on. There is a current from DOB to DO between L1.


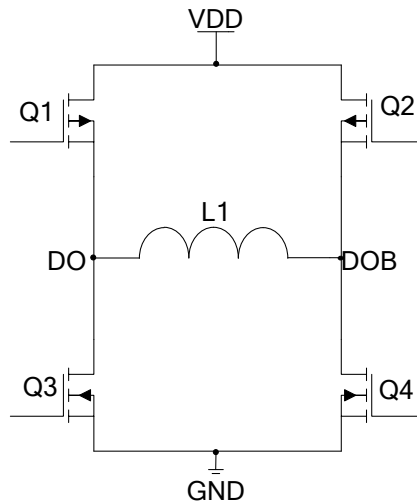


Figure 5. H-Bridge Transistors Output

### Lock protection and auto-restart

The SDC1576 detects the rotation of the motor by internal hall sensor signal, and adjusts lock detection ON time ( $T_{ON}$ ) and lock detection OFF time ( $T_{OFF}$ ) by internal counter.

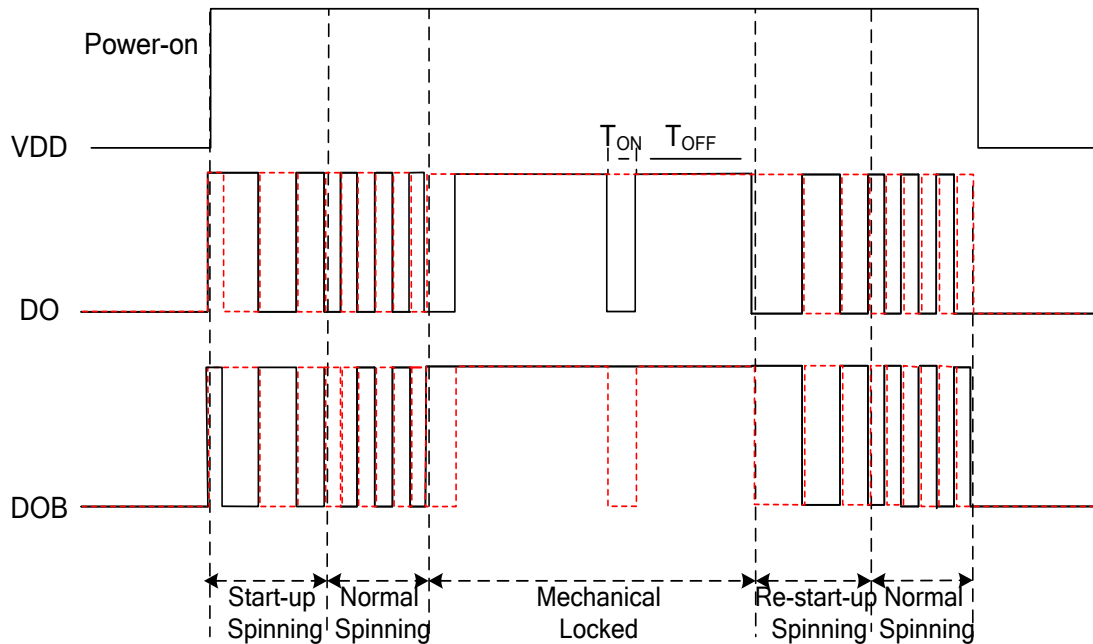

Note1: — North pole face to the hall IC marking surface at power on.

Note2: - - - South pole face to the hall IC marking surface at power on.

Figure 6. Operation Sequence

### Thermal protection

The SDC1576 has a thermal protection. When the internal junction temperature reaches  $160^{\circ}\text{C}$ , the output devices will be switched off. When the IC's junction temperature cools by  $20^{\circ}\text{C}$ , the thermal sensor will turn the output devices on again, resulting in a pulsed output during continuous thermal protection.

Typical Application



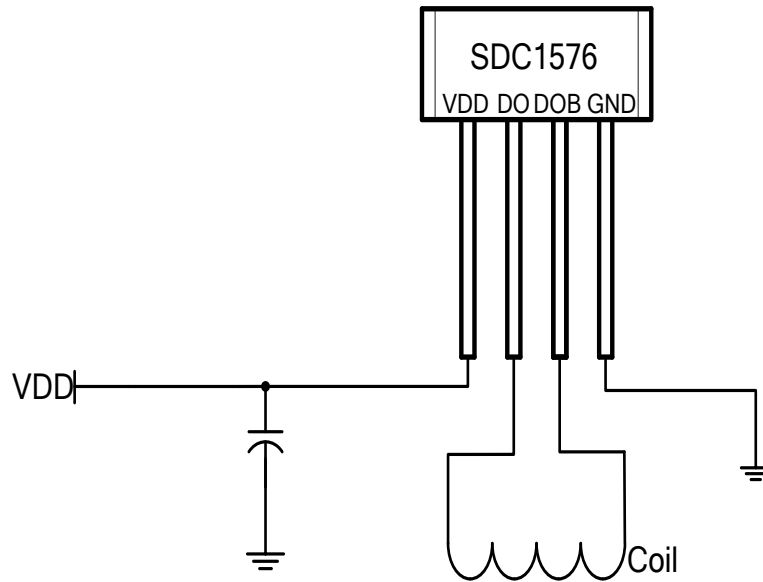


Figure7. Typical Application

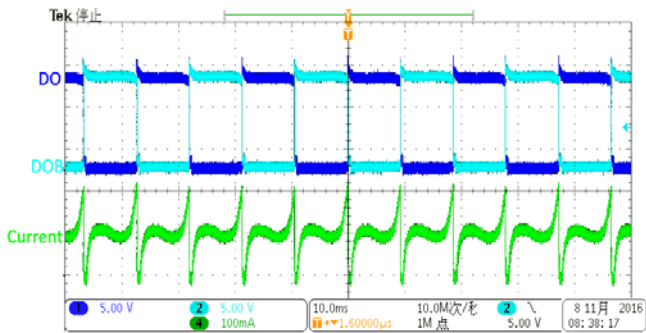


**Operation Waveforms**


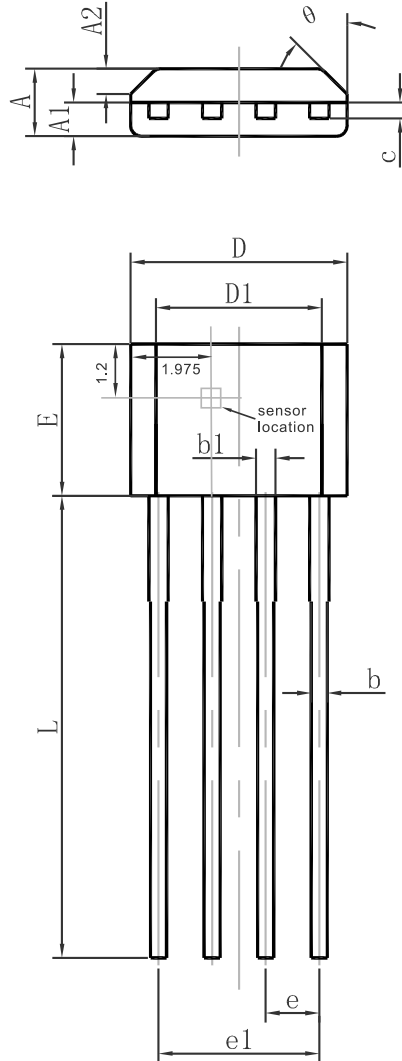
Normal Spinning@VDD=12V

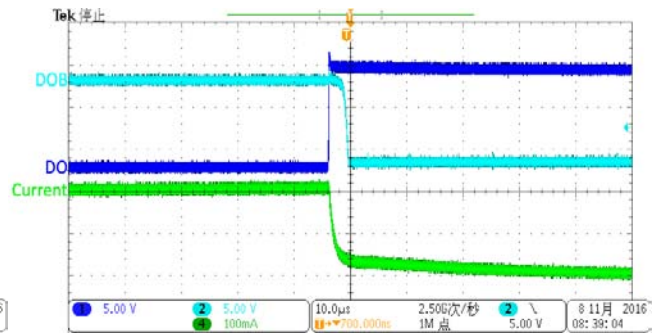

Commutation@VDD=12V

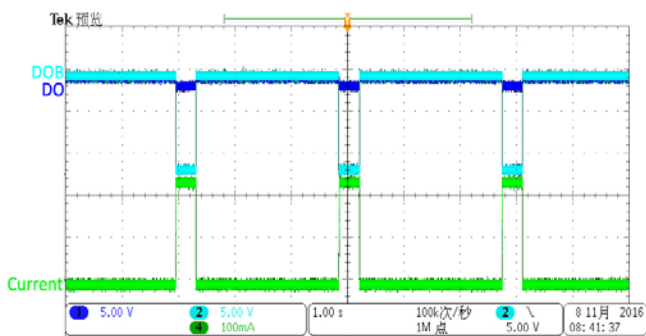

Mechanical Locked@VDD=12V

**Package Dimension**  
**TO-94**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.400	1.800	0.055	0.071
A1	0.700	0.900	0.028	0.035
b1	0.380	0.550	0.015	0.022
C	0.360	0.510	0.014	0.020
D	5.050	5.350	0.202	0.214
D1	4.550	4.850	0.128	0.194
E	3.450	3.750	0.136	0.148
e	1.270 TYP.		0.050 TYP.	
L	14.300	14.700	0.572	0.588
θ	10°TYP.		10°TYP.	



Shaoxing Devechip Microelectronics Co., Ltd.

<http://www.sdc-semi.com/>

#### IMPORTANT NOTICE

Information in this document is provided solely in connection with Shaoxing Devechip Microelectronics Co., Ltd. (abbr. SDC) products. SDC reserves the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at anytime, without notice. SDC does not assume any responsibility for use of any its products for any particular purpose, nor does SDC assume any liability arising out of the application or use of any its products or circuits. SDC does not convey any license under its patent rights or other rights nor the rights of others.

© 2016 Devechip Microelectronics - All rights reserved

---

Contact us:

**Headquarters of Shaoxing**

Address: Tian Mu Road, No13,

Shaoxing city, Zhejiang province, China

Zip code: 312000

Tel: (86) 0575-8861 6750

Fax: (86) 0575-8862 2882

**Shenzhen Branch**

Address: 22A, Shangbu building, Nan Yuan Road, No.68,

Futian District, Shenzhen city, Guangdong province, China

Zip code: 518031

Tel: (86) 0755-8366 1155

Fax: (86) 0755-8301 8528