

Features


- 100V, 29A
- $R_{DS(ON)} = 23m\Omega$ (Max.) @ $V_{GS} = 10V, I_D = 15A$
- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- 100% UIS tested , 100% ΔV_{DS} Tested
- RoHS and Halogen-Free Compliant

Application


- High Frequency Switching
- Synchronous Rectification

Package

PDFN5060-8L

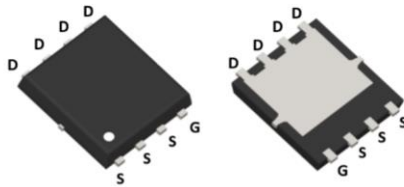

SEG9599AG



Absolute Maximum Ratings $T_C=25^\circ C$ unless otherwise specified

| Symbol | Parameter | Max. | Units |
|-----------------|--|-----------------------------|--------------|
| V_{DSS} | Drain-Source Voltage | 100 | V |
| V_{GSS} | Gate-Source Voltage | ± 20 | V |
| I_D | Continuous Drain Current ^{note5} | $T_C = 25^\circ C$ 29 | A |
| I_D | Continuous Drain Current ^{note5} | $T_C = 100^\circ C$ 18.5 | A |
| I_{DM} | Pulsed Drain Current ^{note3} | 116 | A |
| P_D | Power Dissipation ^{note2} | $T_C = 25^\circ C$ 29 | W |
| I_{AS} | Avalanche Current ^{note3,6} | 8 | A |
| E_{AS} | Single Pulse Avalanche Energy ^{note3,6} | 16 | mJ |
| $R_{\theta JC}$ | Thermal Resistance, Junction to Case | 4.3 | $^\circ C/W$ |
| $R_{\theta JA}$ | Thermal Resistance, Junction to Ambient ^{note1,4} | 62 | $^\circ C/W$ |
| T_J, T_{STG} | Operating and Storage Temperature Range | -55 to +150 | $^\circ C$ |

Electrical Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise specified

| Symbol | Parameter | Test Condition | Min. | Typ. | Max. | Units |
|----------------------------------|-----------------------------------|---|------|------|-----------|------------|
| Off Characteristic | | | | | | |
| BV_{DSS} | Drain-Source Breakdown Voltage | $V_{GS} = 0V, I_D = 250\mu A$ | 100 | - | - | V |
| I_{DSS} | Drain-Source Leakage Current | $V_{DS} = 80V, V_{GS} = 0V$ | - | - | 1 | μA |
| I_{GSS} | Gate to Body Leakage Current | $V_{DS} = 0V, V_{GS} = \pm 20V$ | - | - | ± 100 | nA |
| On Characteristics | | | | | | |
| $V_{GS(th)}$ | Gate Threshold Voltage | $V_{DS} = V_{GS}, I_D = 250\mu A$ | 1.2 | 1.8 | 2.6 | V |
| $R_{DS(on)}$ | Static Drain-Source On-Resistance | $V_{GS} = 10V, I_D = 15A$ | - | 19.5 | 23 | m Ω |
| | | $V_{GS} = 4.5V, I_D = 10A$ | - | - | 33 | m Ω |
| g_{fs} | Forward Threshold Voltage | $V_{DS} = 10V, I_D = 20A$ | - | 22 | - | S |
| R_g | Gate Resistance | $V_{DS} = V_{GS} = 0V, f = 1.0MHz$ | - | 1.62 | - | Ω |
| Dynamic Characteristics | | | | | | |
| C_{iss} | Input Capacitance | $V_{DS} = 50V, V_{GS} = 0V,$ $f = 1.0MHz$ | - | 822 | - | pF |
| C_{oss} | Output Capacitance | | - | 310 | - | pF |
| C_{rss} | Reverse Transfer Capacitance | | - | 23.5 | - | pF |
| Switching Characteristics | | | | | | |
| Q_g | Total Gate Charge | $V_{DS} = 50V, I_D = 20A,$ $V_{GS} = 10V$ | - | 22.7 | - | nC |
| Q_{gs} | Gate-Source Charge | | - | 6.2 | - | |
| Q_{gd} | Gate-Drain("Miller") Charge | | - | 5.3 | - | |
| $t_{d(on)}$ | Turn-On Delay Time | $V_{DS} = 50V, I_D = 20A,$ $R_G = 3\Omega, V_{GS} = 10V$ | - | 15 | - | ns |
| t_r | Turn-On Rise Time | | - | 3.2 | - | |
| $t_{d(off)}$ | Turn-Off Delay Time | | - | 30 | - | |
| t_f | Turn-Off Fall Time | | - | 7.6 | - | |
| Diode Characteristics | | | | | | |
| I_S | Continuous Source Current | | - | - | 29 | A |
| V_{SD} | Diode Forward Voltage | $I_S = 20A, V_{GS} = 0V$ | - | 0.88 | 1.0 | V |
| t_{rr} | Reverse Recovery Time | $I_{SD} = 20A,$ $di_{SD}/dt = 100A/\mu s$ | - | 34 | - | ns |
| Q_{rr} | Reverse Recovery Charge | | - | 31 | - | nC |

Notes:

- The value of $R_{\theta JC}$ is measured in a still air environment with $T_A = 25^{\circ}\text{C}$ and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.
- The power dissipation P_D is based on $T_{J(MAX)} = 150^{\circ}\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- Single pulse width limited by junction temperature $T_{J(MAX)} = 150^{\circ}\text{C}$.
- The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.
- The maximum current rating is package limited.
- The EAS data shows Max. rating. The test condition is $V_{DS} = 50V, V_{GS} = 10V, L = 0.5mH$

Typical Performance Characteristics

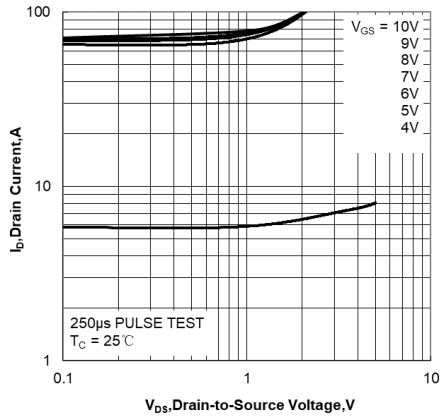


Figure 1. Output Characteristics

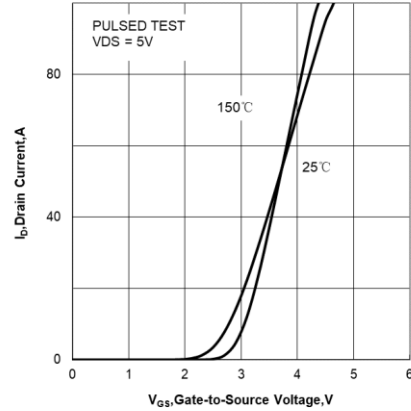


Figure 2. Transfer Characteristics

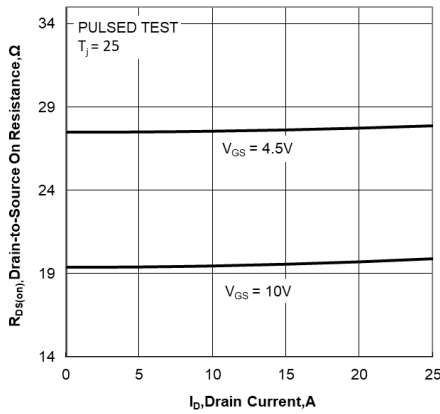


Figure 3. Drain-to-Source On Resistance vs Drain Current

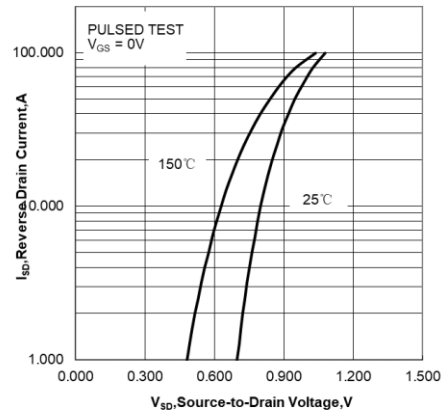


Figure 4. Body Diode Forward Voltage vs Source Current and Temperature

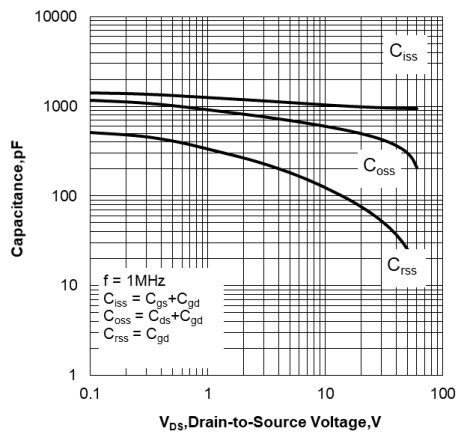


Figure 5. Capacitance Characteristics

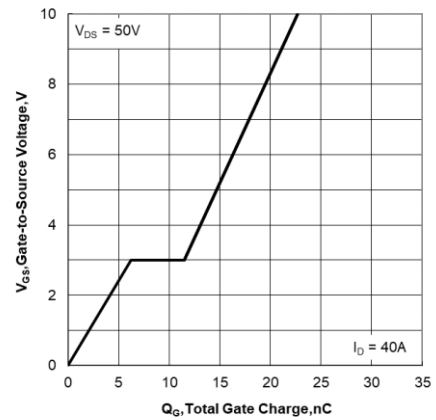


Figure 6. Gate Charge Characteristics

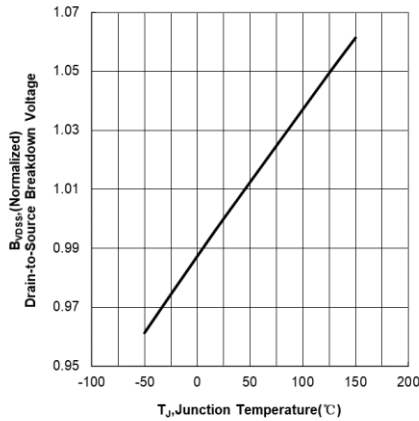


Figure 7. Normalized Breakdown Voltage vs Junction Temperature

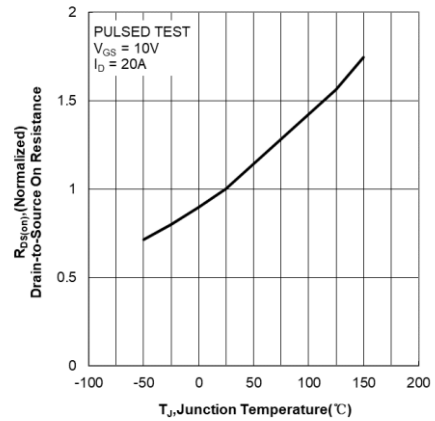


Figure 8. Normalized On Resistance vs Junction Temperature

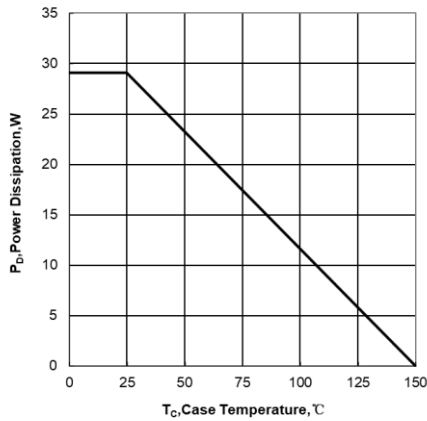


Figure 9. Maximum Continuous Drain Current vs Case Temperature

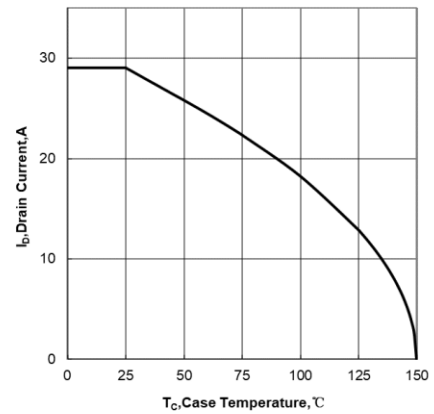


Figure 10. Maximum Power Dissipation vs Case Temperature

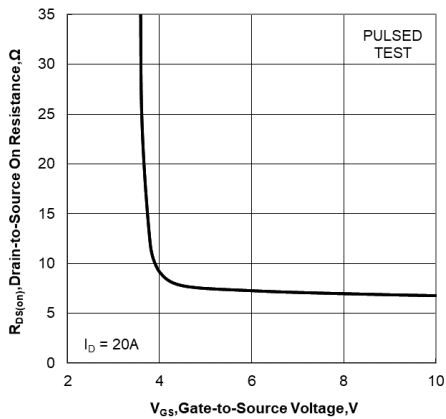


Figure 11. Drain-to-Source On Resistance vs Gate Voltage and Drain Current

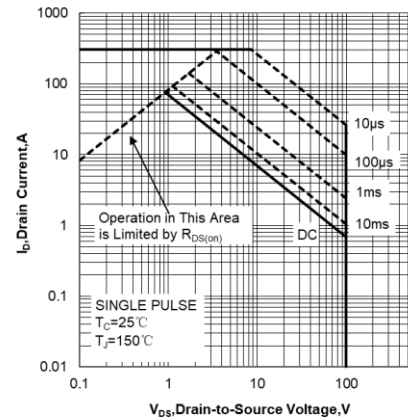


Figure 12. Maximum Safe Operating Area



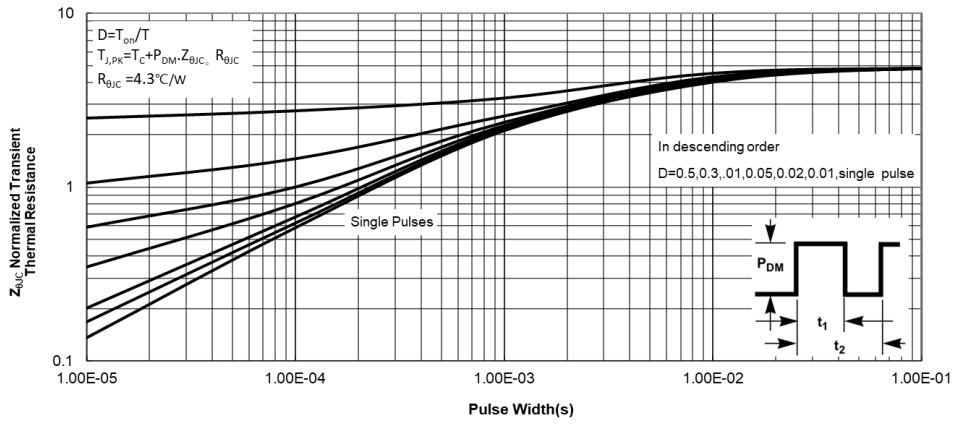


Figure 13. Maximum Effective Transient Thermal Impedance, Junction-to-Case

PDFN5060-8L Package Mechanical Data

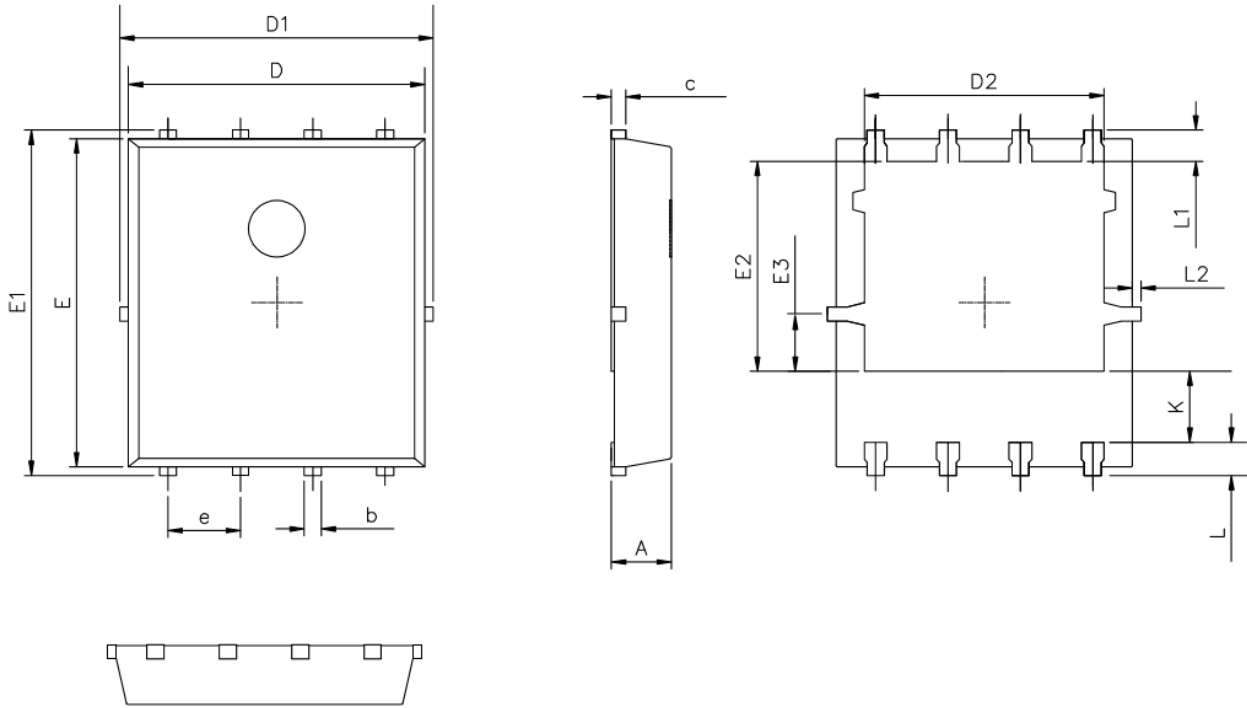

RECOMMENDED LAND PATTERN

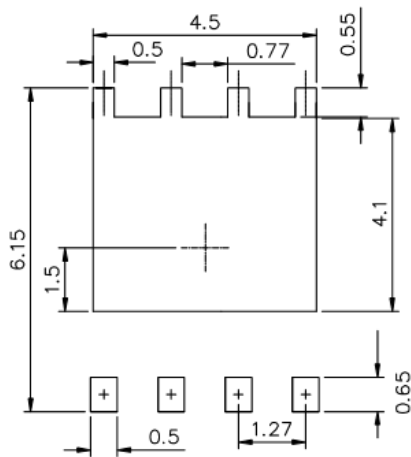

UNIT:mm

| | MIN | NOM | MAX |
|----|-------|-------|-------|
| A | 0.90 | 1.00 | 1.10 |
| b | 0.25 | 0.35 | 0.50 |
| c | 0.10 | 0.20 | 0.30 |
| D | 4.80 | 5.00 | 5.30 |
| D1 | 4.90 | 5.10 | 5.50 |
| D2 | 3.92 | 4.02 | 4.20 |
| E | 5.65 | 5.75 | 5.85 |
| E1 | 5.90 | 6.05 | 6.20 |
| E2 | 3.325 | 3.525 | 3.775 |
| E3 | 0.80 | 0.90 | 1.00 |
| e | | 1.27 | |
| L | 0.40 | 0.55 | 0.70 |
| L1 | | 0.65 | |
| L2 | 0.00 | | 0.15 |
| K | 1.00 | 1.30 | 1.50 |

SEG9599AG Product Description

Silicon N-Channel MOSFET



NOTE:

1. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
2. Please do not exceed the absolute maximum ratings of the device when circuit designing.
3. Winsemi Microelectronics Co., Ltd reserved the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

WINSEMI Microelectronics Co., Ltd.

ADD: Room 1002, East, Phase 2, HighTech Plaza, Tian-An Cyber Park, Che gong miao, FuTian, Shenzhen, P.R. China.

Post Code : 518040

Tel : +86-755-8250 6288

FAX : +86-755-8250 6299

Web Site : www.winsemi.com