


Features

- 100V, 190A
- $R_{DS(ON)} = 3.5m\Omega$ (Max.) @ $V_{GS} = 10V, I_D = 20A$
- Low $R_{DS(on)}$ & FOM
- Extremely low switching loss
- Excellent stability and uniformity
- 100% UIS tested , 100% ΔV_{DS} Tested
- RoHS and Halogen-Free Compliant


Application

- High Frequency Switching
- Synchronous Rectification

Package



TO-263
SEK9718A3GH

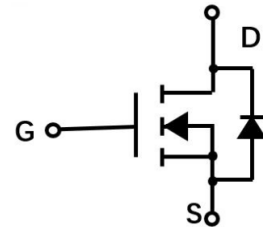

Absolute Maximum Ratings $T_C=25^\circ C$ unless otherwise specified

Symbol	Parameter	Max.	Units
V_{DSS}	Drain-Source Voltage	100	V
V_{GSS}	Gate-Source Voltage	± 20	V
I_D	Continuous Drain Current ^{note5}	$T_C = 25^\circ C$ 190	A
I_D	Continuous Drain Current ^{note5}	$T_C = 100^\circ C$ 119.5	A
I_{DM}	Pulsed Drain Current ^{note3}	760	A
P_D	Power Dissipation ^{note2}	$T_C = 25^\circ C$ 250	W
I_{AS}	Avalanche Current ^{note3,6}	32	A
E_{AS}	Single Pulse Avalanche Energy ^{note3,6}	230	mJ
$R_{\theta JC}$	Thermal Resistance, Junction to Case	0.5	$^\circ C/W$
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient ^{note1,4}	50	$^\circ C/W$
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ C$


Electrical Characteristics $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS} = 0V, I_D = 250\mu A$	100	-	-	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS} = 80V, V_{GS} = 0V$	-	-	1	μA
I_{GSS}	Gate to Body Leakage Current	$V_{DS} = 0V, V_{GS} = \pm 20V$	-	-	± 100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	3	4	V
$R_{DS(on)}$	Static Drain-Source On-Resistance	$V_{GS} = 10V, I_D = 20A$	-	2.8	3.5	m Ω
R_g	Gate Resistance	$V_{DS} = V_{GS}=0V, f = 1.0MHz$	-	1.8	-	Ω
Dynamic Characteristics						
C_{iss}	Input Capacitance	$V_{DS} = 50V, V_{GS} = 0V,$ $f = 1.0MHz$	-	5215	-	pF
C_{oss}	Output Capacitance		-	1582	-	pF
C_{rss}	Reverse Transfer Capacitance		-	85	-	pF
Switching Characteristics						
Q_g	Total Gate Charge	$V_{DS} = 50V, I_D = 50A,$ $V_{GS} = 10V$	-	68	-	nC
Q_{gs}	Gate-Source Charge		-	26	-	
Q_{gd}	Gate-Drain("Miller") Charge		-	31	-	
$t_{d(on)}$	Turn-On Delay Time	$V_{DS} = 50V, I_D = 50A,$ $R_G = 3\Omega, V_{GS}=10V$	-	21	-	ns
t_r	Turn-On Rise Time		-	27	-	
$t_{d(off)}$	Turn-Off Delay Time		-	78	-	
t_f	Turn-Off Fall Time		-	30	-	
Diode Characteristics						
I_S	Continuous Source Current		-	-	190	A
V_{SD}	Diode Forward Voltage	$I_S=20A, V_{GS} = 0V$	-	0.80	1.0	V
t_{rr}	Reverse Recovery Time	$I_{SD}=20A,$	-	132	-	ns
Q_{rr}	Reverse Recovery Charge	$di_{SD}/dt=100A/\mu s$	-	680	-	nC

Notes:

- The value of $R_{\theta JC}$ is measured in a still air environment with $T_A = 25^{\circ}\text{C}$ and the maximum allowed junction temperature of 150°C . The value in any given application depends on the user's specific board design.
- The power dissipation P_D is based on $T_{J(MAX)}=150^{\circ}\text{C}$, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used.
- Single pulse width limited by junction temperature $T_{J(MAX)}=150^{\circ}\text{C}$.
- The $R_{\theta JA}$ is the sum of the thermal impedance from junction to case $R_{\theta JC}$ and case to ambient.
- The maximum current rating is package limited.
- The EAS data shows Max. rating. The test condition is $V_{DS}=50V, V_{GS}=10V, L=0.5mH$

TO-263 Package Mechanical Data

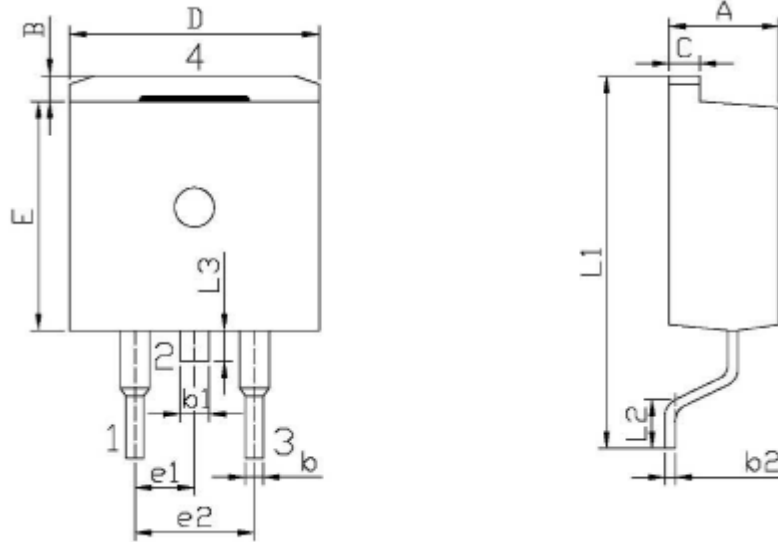

UNIT:mm

	MIN	MAX
A	4.30	4.70
B	1.00	1.40
b	0.70	0.90
b1	1.15	1.35
b2	0.40	0.60
C	1.20	1.40
D	9.80	10.20
E	9.00	9.40
e1	2.34	2.74
e2	4.88	5.28
L1	15.00	16.00
L2	2.24	2.84
L3	1.20	1.60

SEK9718A3GH Product Description

Silicon N-Channel MOSFET



NOTE:

1. We strongly recommend customers check carefully on the trademark when buying our product, if there is any question, please don't be hesitate to contact us.
2. Please do not exceed the absolute maximum ratings of the device when circuit designing.
3. Winsemi Microelectronics Co., Ltd reserved the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

WINSEMI Microelectronics Co., Ltd.

ADD: Room 1002, East, Phase 2, HighTech Plaza, Tian-An Cyber Park, Che gong miao, FuTian, Shenzhen, P.R. China.

Post Code : 518040

Tel : +86-755-8250 6288

FAX : +86-755-8250 6299

Web Site : www.winsemi.com