



NIKO-SEM**N-Channel Enhancement Mode
Field Effect Transistor****PD676BA**

TO-252

Halogen-Free & Lead-Free

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
40V	2.9mΩ	133A



1. GATE
2. DRAIN
3. SOURCE

**ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)**

PARAMETERS/TEST CONDITIONS	SYMBOL	LIMITS	UNITS
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ²	I_D	130	A
$T_C = 100^\circ\text{C}$		82	
Continuous Drain Current ²	I_D	19	A
$T_A = 100^\circ\text{C}$		15	
Pulsed Drain Current ¹	I_{DM}	250	
Avalanche Current	I_{AS}	67	
Avalanche Energy	E_{AS}	227	mJ
Power Dissipation	P_D	83	W
$T_C = 100^\circ\text{C}$		33	
Power Dissipation	P_D	2	W
$T_A = 100^\circ\text{C}$		1.28	
Operating Junction & Storage Temperature Range	T_j, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$	1.5	62.5	°C / W
Junction-to-Ambient	$R_{\theta JA}$			

¹Pulse width limited by maximum junction temperature.

²Package limitation current is 85A.

NIKO-SEM
**N-Channel Enhancement Mode
Field Effect Transistor**
PD676BA

TO-252

Halogen-Free & Lead-Free

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNITS
			MIN	Typ	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(\text{BR})\text{DSS}}$	$V_{\text{GS}} = 0\text{V}, I_D = 250\mu\text{A}$	40			V
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{DS}} = V_{\text{GS}}, I_D = 250\mu\text{A}$	1.3	1.7	2.3	
Gate-Body Leakage	I_{GSS}	$V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 20\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = 32\text{V}, V_{\text{GS}} = 0\text{V}$			1	
		$V_{\text{DS}} = 30\text{V}, V_{\text{GS}} = 0\text{V}, T_J = 125^\circ\text{C}$			10	μA
Drain-Source On-State Resistance ¹	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}} = 4.5\text{V}, I_D = 16\text{A}$		2.6	3.7	
		$V_{\text{GS}} = 10\text{V}, I_D = 20\text{A}$		2.3	2.9	$\text{m}\Omega$
Forward Transconductance ¹	g_{fs}	$V_{\text{DS}} = 5\text{V}, I_D = 20\text{A}$	105			S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 20\text{V}, f = 1\text{MHz}$		6266		pF
Output Capacitance	C_{oss}			705		
Reverse Transfer Capacitance	C_{rss}			412		
Gate Resistance	R_g	$V_{\text{GS}} = 0\text{V}, V_{\text{DS}} = 0\text{V}, f = 1\text{MHz}$	1.5			Ω
Total Gate Charge ²	$Q_{\text{g}(\text{VGS}=10\text{V})}$	$V_{\text{DS}} = 20\text{V}, I_D = 20\text{A}$		117		nC
	$Q_{\text{g}(\text{VGS}=4.5\text{V})}$			59		
Gate-Source Charge ²	Q_{gs}			19		
Gate-Drain Charge ²	Q_{gd}			24		
Turn-On Delay Time ²	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = 20\text{V}, I_D \approx 20\text{A}, V_{\text{GS}} = 10\text{V}, R_{\text{GEN}} = 6\Omega$		30		nS
Rise Time ²	t_r			100		
Turn-Off Delay Time ²	$t_{\text{d}(\text{off})}$			174		
Fall Time ²	t_f			158		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ\text{C}$)						
Continuous Current	I_S	$I_F = 20\text{A}, V_{\text{GS}} = 0\text{V}$			64	A
Forward Voltage ¹	V_{SD}				1.3	V
Reverse Recovery Time	t_{rr}			40		nS
Reverse Recovery Charge	Q_{rr}			28		nC

¹Pulse test : Pulse Width $\leq 300 \mu\text{sec}$, Duty Cycle $\leq 2\%$.²Independent of operating temperature.

NIKO-SEM


**N-Channel Enhancement Mode
Field Effect Transistor**

PD676BA


TO-252

Halogen-Free & Lead-Free


Output Characteristics

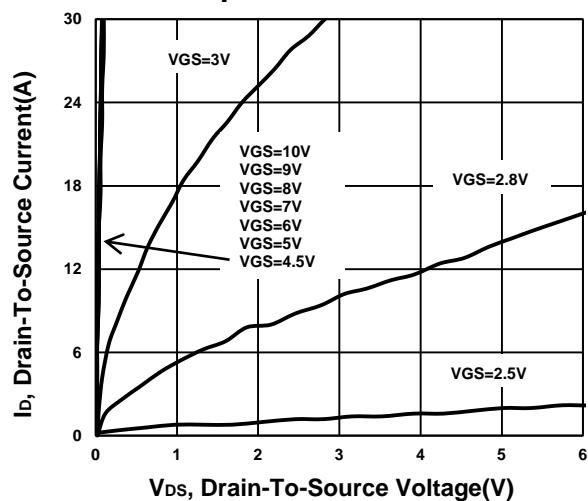


Transfer Characteristics

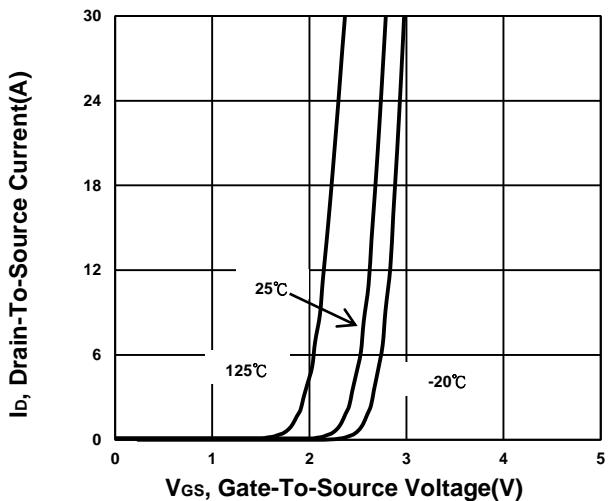


On-Resistance VS Gate-To-Source Voltage

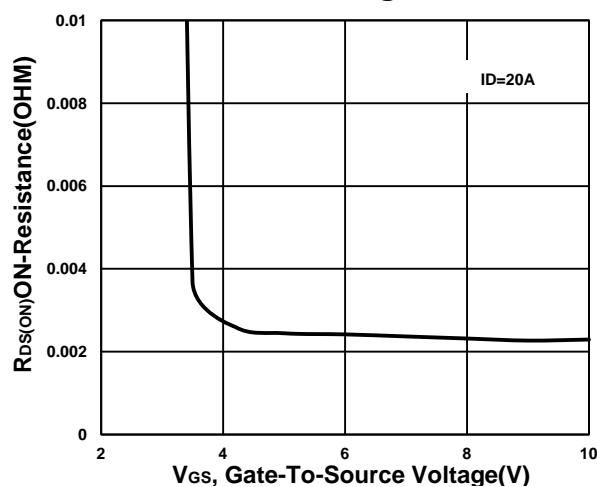


On-Resistance VS Drain Current

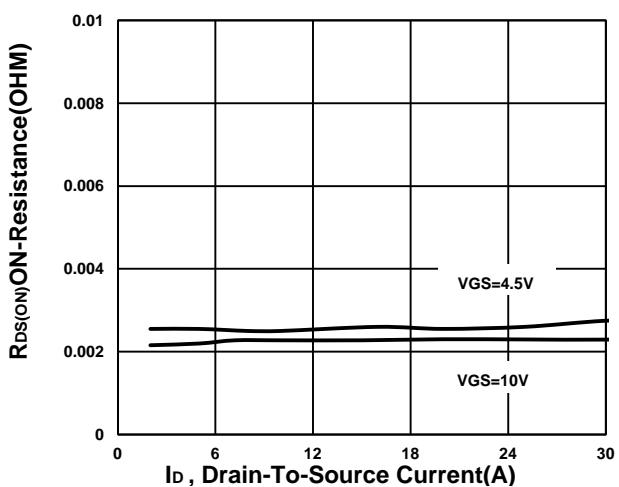

On-Resistance VS Temperature

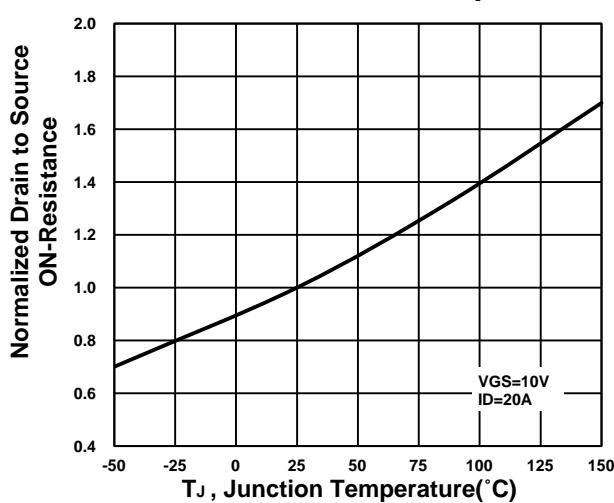





Capacitance Characteristic

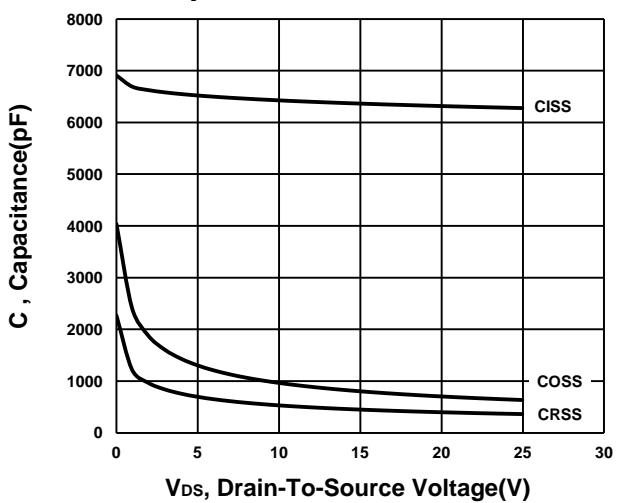

NIKO-SEM**N-Channel Enhancement Mode
Field Effect Transistor****PD676BA**

TO-252

Halogen-Free & Lead-Free

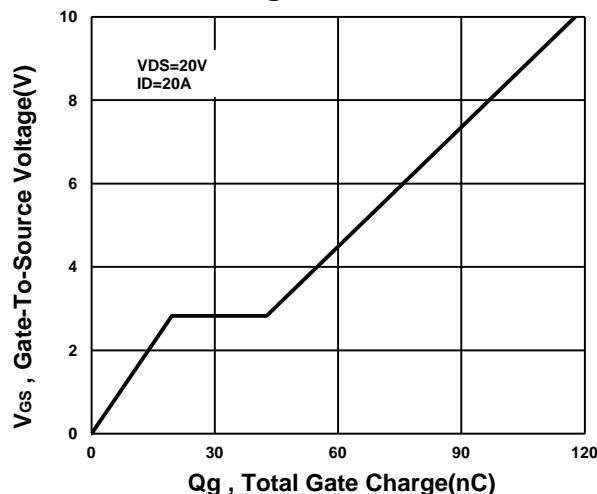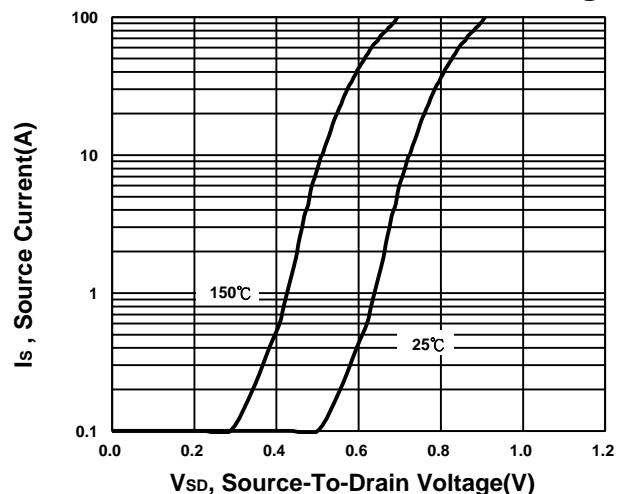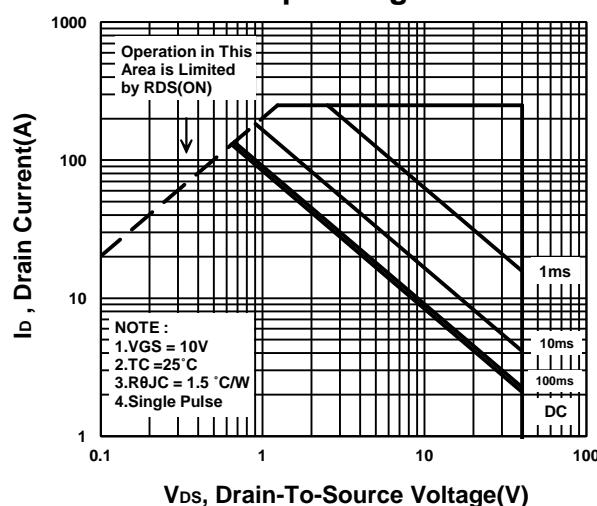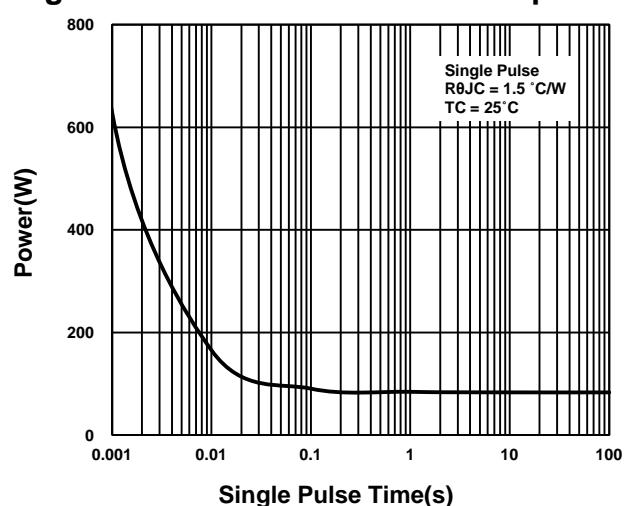Gate charge Characteristics**Source-Drain Diode Forward Voltage****Safe Operating Area****Single Pulse Maximum Power Dissipation****Transient Thermal Response Curve**