

AC/DC Converter FA15-220SXXY2



Typical Features

- ◆ Wide input voltage range:85-265VAC/120-380VDC
- ◆ No-load power consumption≤0.2W
- ◆ Transfer efficiency: 87%(typ.)
- Switching frequency: 65KHz(typ.)
- ◆ Protection: Short Circuit, Over Current, Over Voltage
- ◆ Isolation voltage: 3000VAC
- ◆ Safety Class: CLASS II



Application Field

FA15-220SXXY2---a compact size, high efficient power converter offered by Aipu.

It features universal input voltage, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation. It widely used in industrial, office power and home applications.

Typical Product List										
	Part No.	Output Specification					Max.	Ripple&	Efficiency@	
			Voltage 1	Current 1	Voltage 2	Current 2	Capacitiv	Noise	Full Load	
Certif		Power					e Load	20MHz	220Vac	
							(MAX)	(MAX)	(Typical)	
		(W)	Vo1(V)	lo1(m A)	Vo2(V)	lo2(m A)	u F	mVp-p	%	
	*FA15-220S05Y2	15	5	3000	-	-	3000	200	82	
	FA15-220S12Y2	15	12	1250	-	-	2000	200	86	
_	FA15-220S15Y2	15	15	1000	-	-	1000	200	87	
	FA15-220S24Y2	15	24	625	-	-	600	240	86	

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2: Due to the instrument deviation of the test equipment, the minimum efficiency is -2% of the typical value .

Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 4: * is for models under developing.

Input Specification								
Item	Operating Condition	Min.	Тур.	Max.	Unit			
Input Voltago Pango	AC Input	85	220	265	VAC			
Input Voltage Range	DC Input	120	300	380	VDC			
Input Frequency Range	-	47	50	63	Hz			
Input Current	115VAC	-	-	0.3				
	230VAC	-	-	0.2	A			
Surge Current	115VAC	-	-	16				
Surge Current	220VAC	-	-	30				
No Load Consumption	Input 115VAC	-	-	0.2	W			



AC/DC Converter FA15-220SXXY2



	Input 230VAC		-					
Leakage Current	-		0.5mA TYP/230VAC/50Hz					
Hot plug -		Unavailable						
Remote control terminal	-			Unavailab	le			
Output Specification								
Item	Operating Cond	dition	Min.	Тур.	Max.	Unit		
	Full input voltage	Vo1	-	±2.0	±3.0	%		
Voltage Accuracy	range Any load	Vo2	-	_	_	%		
	71117 1000	Vo1	-	-	±0.5	%		
Line Regulation	Nominal Load	Vo2	-	-	-	%		
	Nominal input	Vo1	-	-	±5.0	%		
Load Regulation	Voltage 20%~100% load	Vo2	-	-	-	%		
	Single Output		0	-	-	%		
Minimum load	Positive Negative Dual		-	-	-			
William Idad	Positive Negative Dual output isolated		-	-	-	%		
Turn-on Delay Time	Input 220VAC (full load)		-	1000	-	mS		
Power-off Holding Time	Input 220VAC (full load)		-	100	-	mS		
Dynamic	25%~50%~25	5%	Oversh	%				
Response	50%~75%~50	0%	Reco	mS				
Output Overshooting	Full input voltage range			%				
Short Circuit Protection			Contin	Hiccup				
Drift Coefficient	-		- ±0.03% -			%/°C		
Over Current Protection	Input 220VAC		≥130	Hiccup				
	Output 5VDC			VDO				
0 7/1 5 1 1	Output 12VDC							
Over Voltage Protection	Output 15VD	C		VDC				
	Output 24VDC			1				
Diople 9 Notes	-		-	mV				
Ripple & Noise	Note: Ripple& Noise is tested by Twisted Pair Method, details please see Ripple& Nois					Test at back.		
General Specification	าร							
ltem	Operating Cond	dition	Min.	Тур.	Max.	Unit		
Switching Frequency	-		61	65	73	KHz		
Operating Temperature	-		-40	°C				




AC/DC Converter FA15-220SXXY2




	Note: Ripple & Noise is tested by twisted pair method, for details please see (Ripple&						
	Noise Test) at back						
Storage Temperature	-	-40	-	+85			
Caldaria a Taran aratura	Wave-soldering	Wave-soldering 260±4°C, timing 5-10S					
Soldering Temperature	Manual-soldering	360±8°C, timing 4-7S					
Relative Humidity	-	10	-	90	%RH		
Isolation Voltage	Input-Output,Test 1min, leakage current ≤5mA	3000	-	-	VAC		
Insulation Resistance	Input-Output@DC500V	100	-	-	МΩ		
Vibration	-	10-55Hz,10G,30Min, alongX,Y,Z					
MTBF	-	MIL-HDBK-217F@25℃>300,000H					

EMC Characteris	stics				
□ NAI	CE	CISPR22/EN55022	CLASS B(see	recommended circuit Photo 1)	
EMI	RE	CISPR22/EN55022	CLASS B(see		
	ESD	IEC/EN61000-4-2	±6KV/8KV	Perf.Criteria B	
	RS	IEC/EN61000-4-3	10V/m	Perf.Criteria A	
	FFT	IEC/EN61000-4-4	±1KV	Perf.Criteria B	
	EFT	IEC/EN61000-4-4	±2KV (see recommended circuit Photo 1)		Perf.Criteria B
	Curao	IEC/EN61000-4-5	±1KV	Perf.Criteria B	
EMC	Surge	IEC/EN61000-4-5	±2KV(see rec	ommended circuit Photo 1)	Perf.Criteria B
	CS	IEC/EN61000-4-6	10Vr.m.s	Perf.Criteria A	
	PFMF	IEC/EN61000-4-8	10A/m	Perf.Criteria A	
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%-70%	Perf.Criteria B	

Packing Dimension

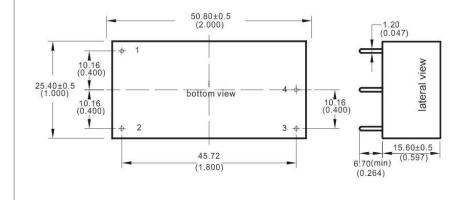

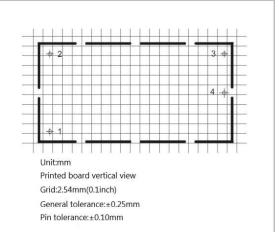



AC/DC Converter FA15-220SXXY2




Packing	Code		LxWxH					
Y2	2		50.8X25.4	2.000X1.000X0.614inch				
Pin Definition								
	Dia and	1	2	3	4			
	Pin-out	AC(N)	AC(L)	+Vo	-Vo			

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.


Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


Test Method:

- (1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.
- (2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line. Power line selected from corresponding diameter wire with insulation according to the flow of output current.

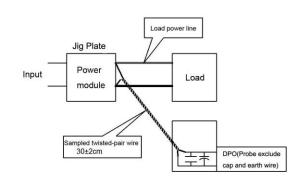

Product Characteristic Curve

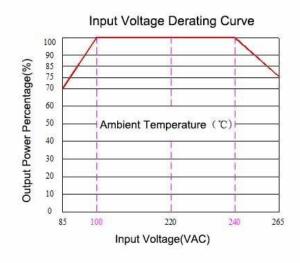

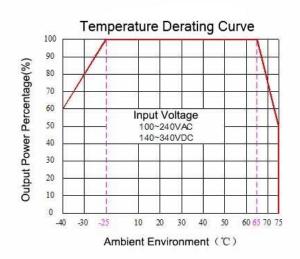

Note

- 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/ 240~265VAC/ 120~140VDC/ 340~380VDC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.




AC/DC Converter FA15-220SXXY2



Application Design Referenced

EMC Solution and Recommend Circuit

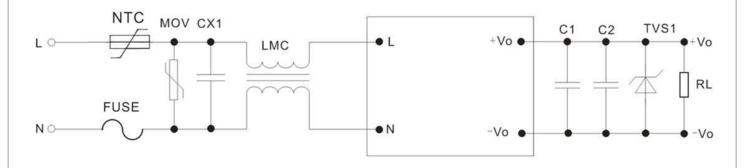

Note:

- FUSE: necessary, recommend 2A~250Vac, slow fusing; 1.
- MOV is voltage dependent resistor, recommend model: 10D561K;
- NTC is thermistors, recommend model:10D-11, to prevent the module from damage when lightning surge.
- LMC is CM inductor, recommend 30mH;
- CX1 is X capacitor, recommend model: 0.22uF/250Vac;
- C1 choose high-frequency and low-impedance electrolytic capacitor, capacitance smaller than capacitive load, and withstand voltage is 1.5 times above the output voltage.
- 7. C2 choose 0.1uF ceramic chip capacitors, withstand voltage is 1.5 times above the output voltage;
- TVS1 is TVS tube, 5V output recommend: SMBJ7.0A, 9V output recommend: SMBJ12.0A, 12V output recommend: SMBJ20A, 15V output recommend: SMBJ20.0A, 24V output recommend: SMBJ30.0A, 48V output recommend: SMBJ64A.

Note:

- 1. The product should be used under the specification range, otherwise it will cause permanent damage to it.
- 2. Product's input terminal should connect to fuse;
- 3.If the product is not worked under the load range(below the minimum load or beyond the load range), we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4.Unless otherwise specified, data in this datasheet are tested under conditions of Ta=25℃, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
- 5.All index testing methods in this datasheet are based on our Company's corporate standards
- 6. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 7.We can provide customized product service.