


**N-Channel Logic Level Enhancement Mode Field Effect Transistor**

**Product Summary:**

$BV_{DSS}$	200V
$R_{DS(on)} (MAX.)$	$0.5 \Omega$
$I_D$	7A

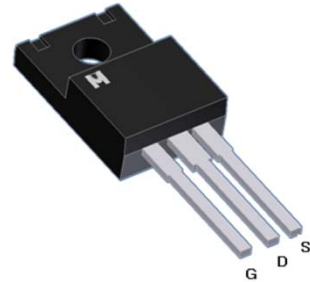

UIS, Rg 100% Tested

Pb-Free Lead Plating



**ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ C$  Unless Otherwise Noted)**

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNIT
Gate-Source Voltage		$V_{GS}$	$\pm 30$	V
Continuous Drain Current	$T_C = 25^\circ C$	$I_D$	7	A
	$T_C = 100^\circ C$		4.5	
Pulsed Drain Current <sup>1</sup>		$I_{DM}$	28	
Avalanche Current		$I_{AS}$	1.5	
Avalanche Energy	$L = 1mH, I_D = 1.5A, R_G = 25 \Omega$	$E_{AS}$	1.12	mJ
Repetitive Avalanche Energy <sup>2</sup>	$L = 0.5mH$	$E_{AR}$	0.56	
Power Dissipation	$T_C = 25^\circ C$	$P_D$	44	W
	$T_C = 100^\circ C$		17	
Operating Junction & Storage Temperature Range		$T_{j}, T_{stg}$	-55 to 150	$^\circ C$

**THERMAL RESISTANCE RATINGS**

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNIT
Junction-to-Case	$R_{\theta JC}$		2.8	$^\circ C / W$
Junction-to-Ambient	$R_{\theta JA}$		65	

<sup>1</sup>Pulse width limited by maximum junction temperature.

<sup>2</sup>Duty cycle  $\leq 1\%$

ELECTRICAL CHARACTERISTICS ( $T_J = 25\text{ }^\circ\text{C}$ , Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
<b>STATIC</b>						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	200			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	3.0	4.0	5.0	
Gate-Body Leakage	$I_{GSS}$	$V_{DS} = 0V, V_{GS} = \pm 30V$			$\pm 100$	nA
Zero Gate Voltage Drain Current	$I_{DSS}$	$V_{DS} = 160V, V_{GS} = 0V$			1	$\mu A$
		$V_{DS} = 130V, V_{GS} = 0V, T_J = 125\text{ }^\circ\text{C}$			25	
On-State Drain Current <sup>1</sup>	$I_{D(ON)}$	$V_{DS} = 10V, V_{GS} = 10V$	7			A
Drain-Source On-State Resistance <sup>1</sup>	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 3.5A$		0.4	0.5	$\Omega$
Forward Transconductance <sup>1</sup>	$g_{fs}$	$V_{DS} = 5V, I_D = 3.5A$		2		S
<b>DYNAMIC</b>						
Input Capacitance	$C_{iss}$	$V_{GS} = 0V, V_{DS} = 25V, f = 1MHz$		803		pF
Output Capacitance	$C_{oss}$			19		
Reverse Transfer Capacitance	$C_{rss}$			16		
Gate Resistance	$R_g$	$V_{GS} = 15mV, V_{DS} = 0V, f = 1MHz$		2.0		$\Omega$
Total Gate Charge <sup>1,2</sup>	$Q_g$	$V_{DS} = 100V, V_{GS} = 10V,$ $I_D = 3.5A$		21.3		nC
Gate-Source Charge <sup>1,2</sup>	$Q_{gs}$			2.9		
Gate-Drain Charge <sup>1,2</sup>	$Q_{gd}$			6		
Turn-On Delay Time <sup>1,2</sup>	$t_{d(on)}$	$V_{DS} = 100V,$ $I_D = 1A, V_{GS} = 10V, R_{GS} = 6\Omega$		20		nS
Rise Time <sup>1,2</sup>	$t_r$			60		
Turn-Off Delay Time <sup>1,2</sup>	$t_{d(off)}$			20		
Fall Time <sup>1,2</sup>	$t_f$			50		
<b>SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (<math>T_C = 25\text{ }^\circ\text{C}</math>)</b>						
Continuous Current	$I_S$				7	A
Pulsed Current <sup>3</sup>	$I_{SM}$				28	
Forward Voltage <sup>1</sup>	$V_{SD}$	$I_F = I_S, V_{GS} = 0V$			1.5	V
Reverse Recovery Time	$t_{rr}$	$I_F = 7A, di_F/dt = 100A / \mu S$		1450		nS
Reverse Recovery Charge	$Q_{rr}$			0.85		$\mu C$


<sup>1</sup>Pulse test : Pulse Width  $\leq 300\text{ }\mu\text{sec}$ , Duty Cycle  $\leq 2\%$

<sup>2</sup>Independent of operating temperature.


<sup>3</sup>Pulse width limited by maximum junction temperature.

Ordering & Marking Information:

Device Name: EMDE0N20F for TO-220F

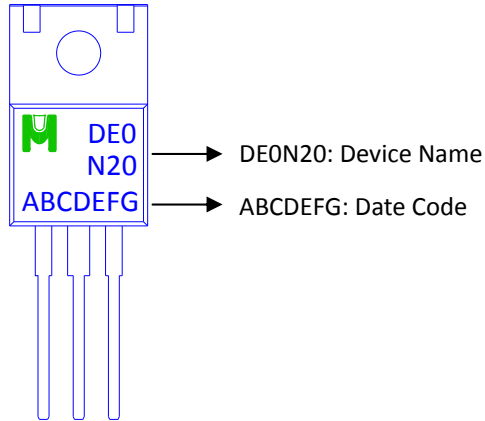

Outline Drawing

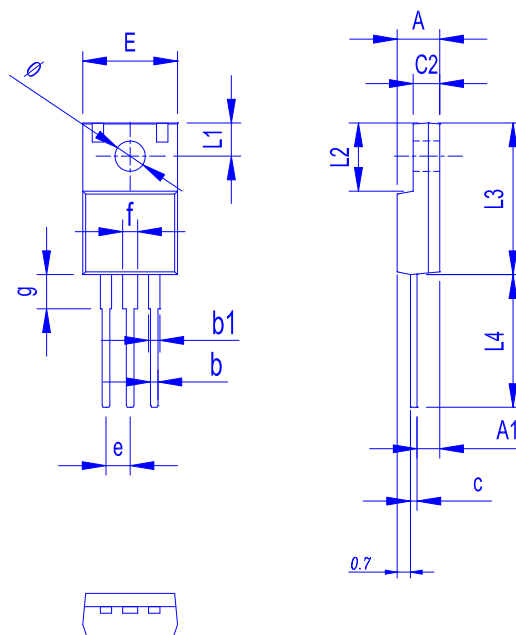

Dimension in mm

Dimension	A	A1	b	b1	c	c2	E	L1	L2	L3	L4	∅	e	f	g
Min.	4.20	1.95	0.50	0.90	0.45	2.34	9.70	2.70	6.48	14.80	12.50	3.00	2.35	1.18	3.13
Max.	4.90	2.96	1.05	1.50	0.80	3.20	10.36	3.80	7.50	16.30	14.50	3.60	2.75	1.90	4.00

TYPICAL CHARACTERISTICS

