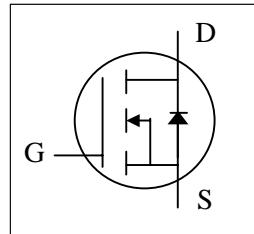





- ▼ 100% R_g & UIS Test
- ▼ Capable of 2.5V Gate Drive
- ▼ Fast Switching Characteristic
- ▼ RoHS Compliant & Halogen-Free



BV_{DSS}	20V
$R_{DS(ON)}$	50mΩ
I_D	14.8A

Description

AP2N050 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.



TO-252 package is widely preferred for all commercial-industrial surface mount applications using infrared reflow technique and suited for high current application due to the low connection resistance.

Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	20	V
V_{GS}	Gate-Source Voltage	± 12	V
$I_D @ T_c=25^\circ\text{C}$	Drain Current, $V_{GS} @ 4.5\text{V}$	14.8	A
$I_D @ T_c=100^\circ\text{C}$	Drain Current, $V_{GS} @ 4.5\text{V}$	9.4	A
I_{DM}	Pulsed Drain Current ¹	60	A
$P_D @ T_c=25^\circ\text{C}$	Total Power Dissipation	17.8	W
$P_D @ T_A=25^\circ\text{C}$	Total Power Dissipation ⁴	2	W
E_{AS}	Single Pulse Avalanche Energy ³	1.8	mJ
T_{STG}	Storage Temperature Range	-55 to 150	°C
T_J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Data

Symbol	Parameter	Value	Units
R_{thj-c}	Maximum Thermal Resistance, Junction-case	7	°C/W
R_{thj-a}	Maximum Thermal Resistance, Junction-ambient (PCB mount) ⁴	62.5	°C/W



AP2N050H

Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{D}}=250\mu\text{A}$	20	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance ²	$V_{\text{GS}}=4.5\text{V}$, $I_{\text{D}}=6\text{A}$	-	-	50	$\text{m}\Omega$
		$V_{\text{GS}}=2.5\text{V}$, $I_{\text{D}}=5\text{A}$	-	-	80	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_{\text{D}}=250\mu\text{A}$	0.3	-	1.2	V
g_{fs}	Forward Transconductance	$V_{\text{DS}}=5\text{V}$, $I_{\text{D}}=6\text{A}$	-	36	-	S
I_{DSS}	Drain-Source Leakage Current	$V_{\text{DS}}=16\text{V}$, $V_{\text{GS}}=0\text{V}$	-	-	10	uA
I_{GSS}	Gate-Source Leakage	$V_{\text{GS}}=\pm 12\text{V}$, $V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
Q_{g}	Total Gate Charge	$I_{\text{D}}=6\text{A}$	-	12	19.2	nC
Q_{gs}	Gate-Source Charge	$V_{\text{DS}}=16\text{V}$	-	1.2	-	nC
Q_{gd}	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=4.5\text{V}$	-	4	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=10\text{V}$	-	7	-	ns
t_{r}	Rise Time	$I_{\text{D}}=6\text{A}$	-	29	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_{\text{G}}=3.3\Omega$	-	19	-	ns
t_{f}	Fall Time	$V_{\text{GS}}=5\text{V}$	-	8	-	ns
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	800	1280	pF
C_{oss}	Output Capacitance	$V_{\text{DS}}=10\text{V}$	-	110	-	pF
C_{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	90	-	pF
R_{g}	Gate Resistance	f=1.0MHz	-	1.5	3	Ω

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward On Voltage ²	$I_{\text{S}}=6\text{A}$, $V_{\text{GS}}=0\text{V}$	-	-	1.2	V
t_{rr}	Reverse Recovery Time	$I_{\text{S}}=6\text{A}$, $V_{\text{GS}}=0\text{V}$,	-	12	-	ns
Q_{rr}	Reverse Recovery Charge	$dI/dt=100\text{A}/\mu\text{s}$	-	2.5	-	nC

Notes:

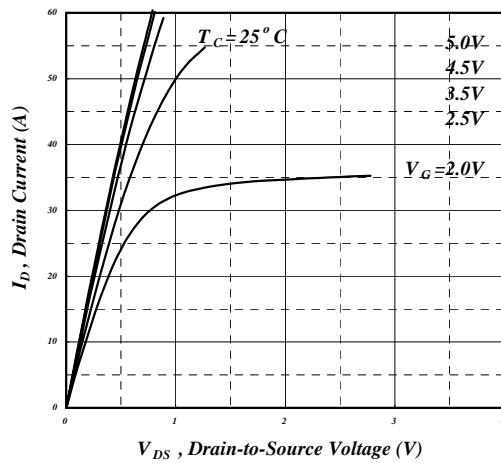
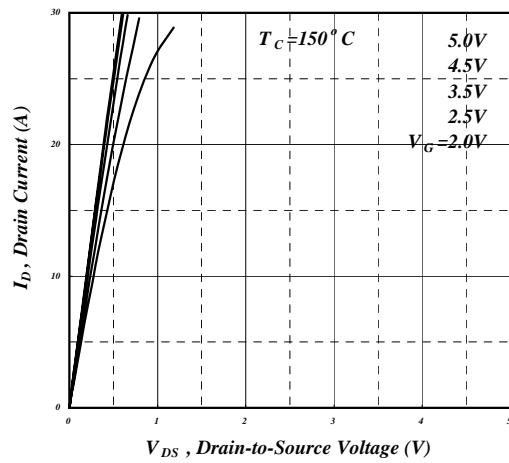
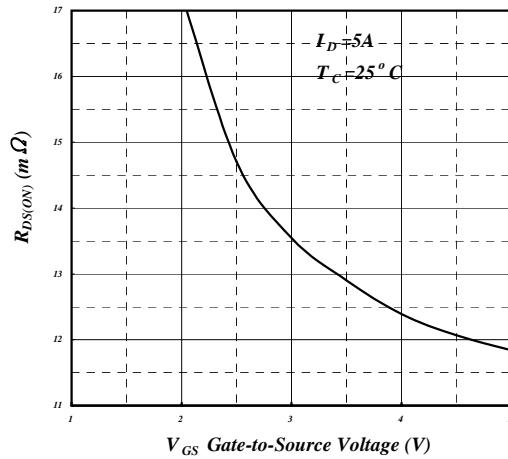
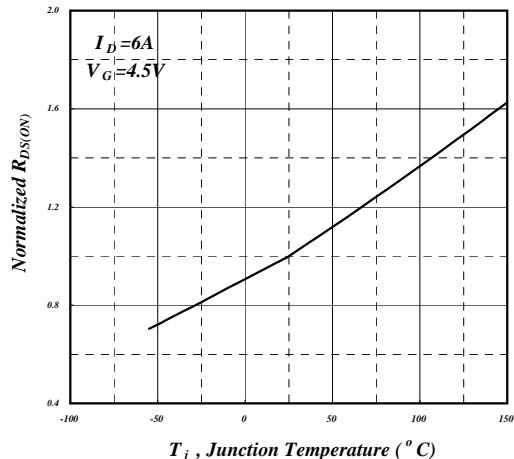
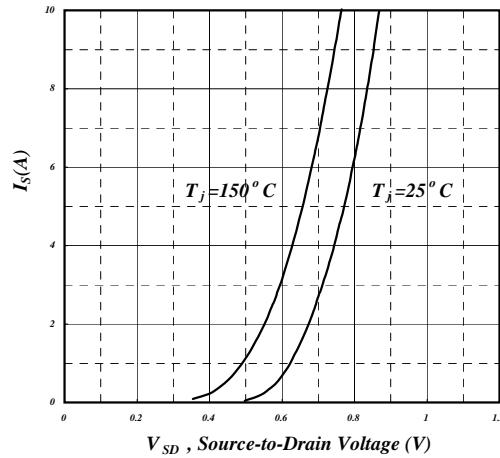
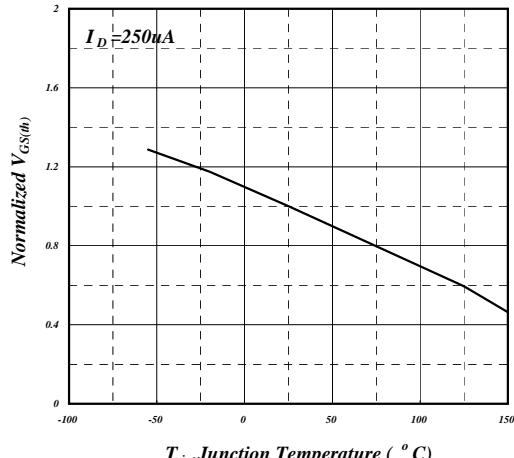
- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Starting $T_j=25^\circ\text{C}$, $V_{\text{DD}}=20\text{V}$, $L=0.1\text{mH}$, $R_{\text{G}}=25\Omega$, $V_{\text{GS}}=10\text{V}$
- 4.Surface mounted on 1 in² copper pad of FR4 board

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.

USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.

APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN.


Fig 1. Typical Output Characteristics

Fig 2. Typical Output Characteristics

Fig 3. On-Resistance v.s. Gate Voltage

Fig 4. Normalized On-Resistance v.s. Junction Temperature

Fig 5. Forward Characteristic of Reverse Diode

Fig 6. Gate Threshold Voltage v.s. Junction Temperature

AP2N050H

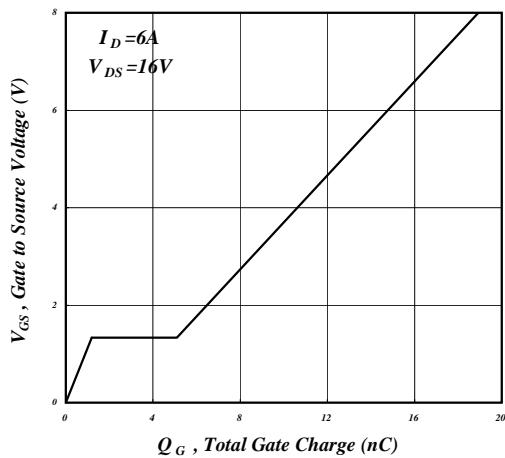


Fig 7. Gate Charge Characteristics

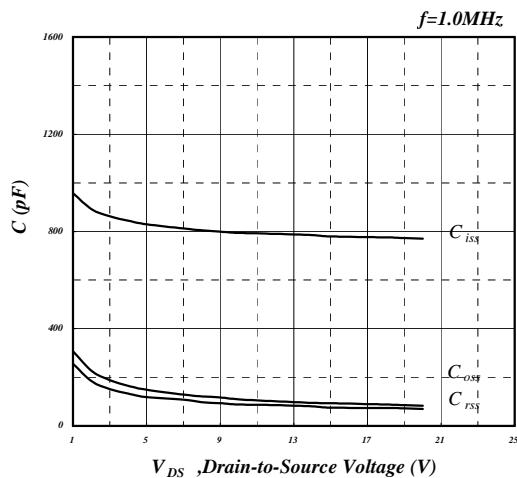


Fig 8. Typical Capacitance Characteristics

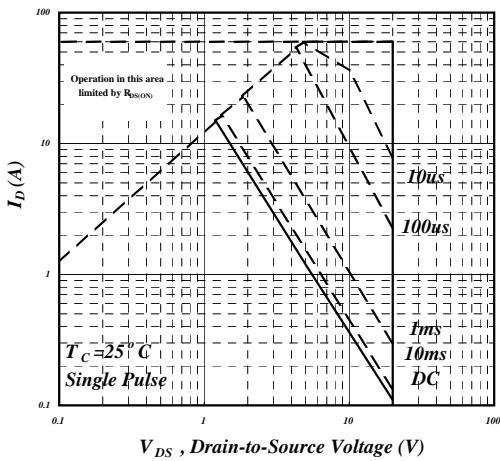


Fig 9. Maximum Safe Operating Area

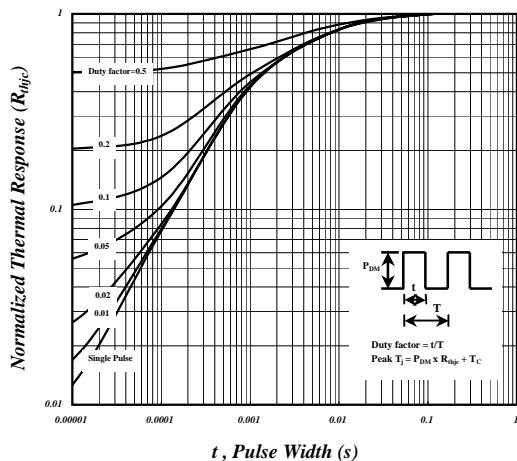


Fig 10. Effective Transient Thermal Impedance

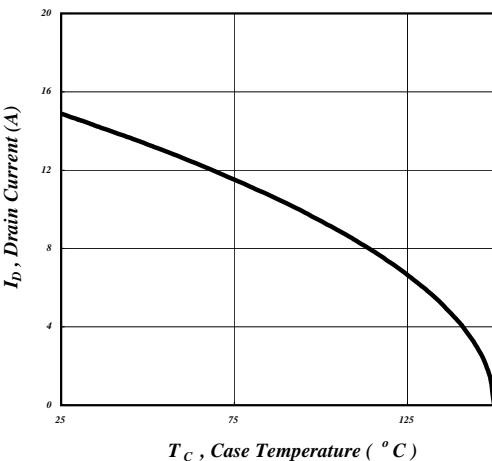


Fig 11. Drain Current v.s. Case Temperature

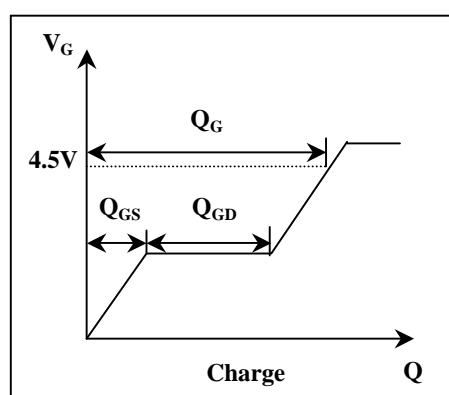


Fig 12. Gate Charge Waveform

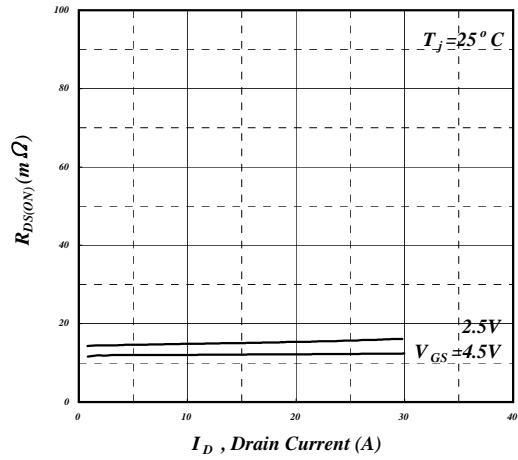


Fig 13. Typ. Drain-Source on State Resistance

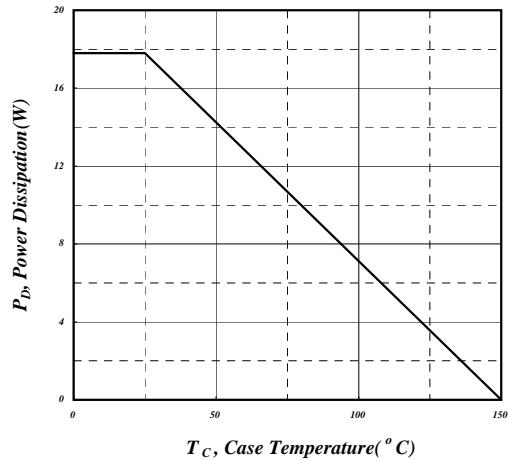


Fig 14. Total Power Dissipation

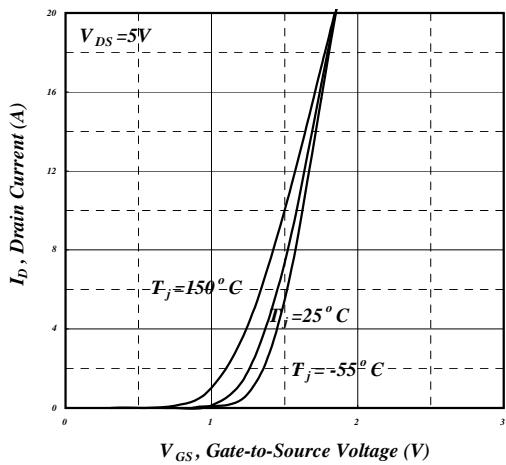


Fig 15. Transfer Characteristics



AP2N050H

MARKING INFORMATION

