





- ▼ Low Gate Charge
- ▼ Fast Switching Characteristic
- ▼ Simple Drive Requirement
- ▼ RoHS Compliant & Halogen-Free



$BV_{DSS}$	-30V
$R_{DS(ON)}$	21mΩ
$I_D^3$	-9A

## Description

AP3P021 series are from Advanced Power innovative design and silicon process technology to achieve the lowest possible on-resistance and fast switching performance. It provides the designer with an extreme efficient device for use in a wide range of power applications.



The SO-8 package is widely preferred for all commercial-industrial surface mount applications and suited for low voltage applications such as DC/DC converters.

## Absolute Maximum Ratings@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Rating	Units
$V_{DS}$	Drain-Source Voltage	-30	V
$V_{GS}$	Gate-Source Voltage	$\pm 25$	V
$I_D @ T_A = 25^\circ\text{C}$	Drain Current, $V_{GS} @ 10\text{V}^3$	-9	A
$I_D @ T_A = 70^\circ\text{C}$	Drain Current, $V_{GS} @ 10\text{V}^3$	-7.2	A
$I_{DM}$	Pulsed Drain Current <sup>1</sup>	-40	A
$P_D @ T_A = 25^\circ\text{C}$	Total Power Dissipation <sup>3</sup>	2.5	W
$E_{AS}$	Single Pulse Avalanche Energy <sup>4</sup>	16.2	mJ
$T_{STG}$	Storage Temperature Range	-55 to 150	°C
$T_J$	Operating Junction Temperature Range	-55 to 150	°C

## Thermal Data

Symbol	Parameter	Value	Unit
$R_{thj-a}$	Maximum Thermal Resistance, Junction-ambient <sup>3</sup>	50	°C/W



## Electrical Characteristics@ $T_j=25^\circ\text{C}$ (unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$\text{BV}_{\text{DSS}}$	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$ , $I_{\text{D}}=-250\mu\text{A}$	-30	-	-	V
$R_{\text{DS}(\text{ON})}$	Static Drain-Source On-Resistance <sup>2</sup>	$V_{\text{GS}}=-10\text{V}$ , $I_{\text{D}}=-9\text{A}$	-	-	21	$\text{m}\Omega$
		$V_{\text{GS}}=-4.5\text{V}$ , $I_{\text{D}}=-6\text{A}$	-	-	42	$\text{m}\Omega$
$V_{\text{GS}(\text{th})}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$ , $I_{\text{D}}=-250\mu\text{A}$	-1	-	-3	V
$g_{\text{fs}}$	Forward Transconductance	$V_{\text{DS}}=-5\text{V}$ , $I_{\text{D}}=-9\text{A}$	-	16	-	S
$I_{\text{DSS}}$	Drain-Source Leakage Current	$V_{\text{DS}}=-24\text{V}$ , $V_{\text{GS}}=0\text{V}$	-	-	-10	$\text{uA}$
$I_{\text{GSS}}$	Gate-Source Leakage	$V_{\text{GS}}=+25\text{V}$ , $V_{\text{DS}}=0\text{V}$	-	-	$\pm 0.1$	$\text{uA}$
$Q_g$	Total Gate Charge	$I_{\text{D}}=-6\text{A}$	-	9	14.4	nC
$Q_{\text{gs}}$	Gate-Source Charge	$V_{\text{DS}}=-15\text{V}$	-	3.5	-	nC
$Q_{\text{gd}}$	Gate-Drain ("Miller") Charge	$V_{\text{GS}}=-4.5\text{V}$	-	3.5	-	nC
$t_{\text{d}(\text{on})}$	Turn-on Delay Time	$V_{\text{DS}}=-15\text{V}$	-	10	-	ns
$t_r$	Rise Time	$I_{\text{D}}=-1\text{A}$	-	7	-	ns
$t_{\text{d}(\text{off})}$	Turn-off Delay Time	$R_{\text{G}}=3.3\Omega$	-	34	-	ns
$t_f$	Fall Time	$V_{\text{GS}}=-10\text{V}$	-	21	-	ns
$C_{\text{iss}}$	Input Capacitance	$V_{\text{GS}}=0\text{V}$	-	950	1520	pF
$C_{\text{oss}}$	Output Capacitance	$V_{\text{DS}}=-15\text{V}$	-	185	-	pF
$C_{\text{rss}}$	Reverse Transfer Capacitance	f=1.0MHz	-	135	-	pF

## Source-Drain Diode


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{\text{SD}}$	Forward On Voltage <sup>2</sup>	$I_{\text{S}}=-2.1\text{A}$ , $V_{\text{GS}}=0\text{V}$	-	-	-1.2	V
$t_{\text{rr}}$	Reverse Recovery Time	$I_{\text{S}}=-9\text{A}$ , $V_{\text{GS}}=0\text{V}$ ,	-	11	-	ns
$Q_{\text{rr}}$	Reverse Recovery Charge	$dI/dt=-100\text{A}/\mu\text{s}$	-	3.5	-	nC

## Notes:


- 1.Pulse width limited by Max. junction temperature.
- 2.Pulse test
- 3.Surface mounted on 1 in<sup>2</sup> copper pad of FR4 board, t ≤ 10s ; 125 °C/W when mounted on Min. copper pad.
- 4.Starting  $T_j=25^\circ\text{C}$  ,  $V_{\text{DD}}=-30\text{V}$  ,  $L=0.1\text{mH}$  ,  $R_{\text{G}}=25\Omega$

THIS PRODUCT IS SENSITIVE TO ELECTROSTATIC DISCHARGE, PLEASE HANDLE WITH CAUTION.


USE OF THIS PRODUCT AS A CRITICAL COMPONENT IN LIFE SUPPORT, AUTOMOTIVE OR OTHER SIMILAR SYSTEMS IS NOT AUTHORIZED.  
 APEC DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED  
 HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.  
 APEC RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE  
 RELIABILITY, FUNCTION OR DESIGN.

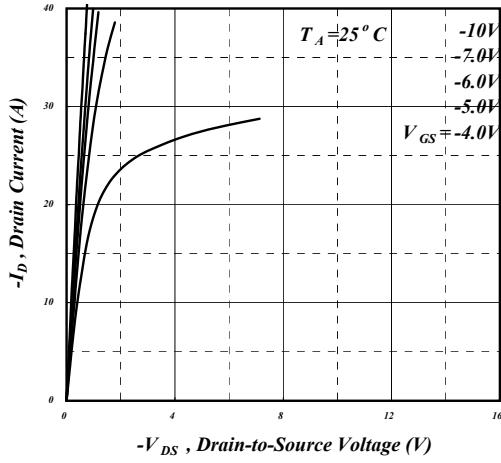


**Fig 1. Typical Output Characteristics**

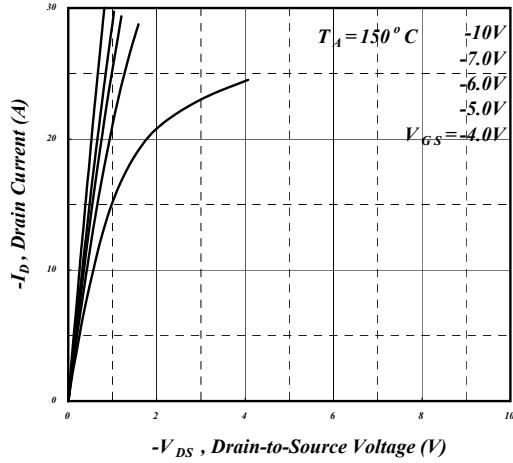


**Fig 2. Typical Output Characteristics**

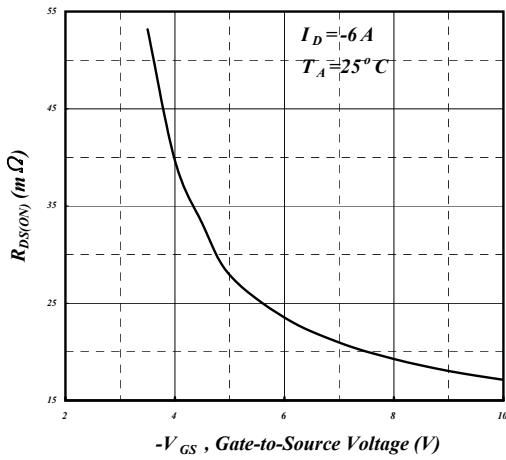


**Fig 3. On-Resistance v.s. Gate Voltage**

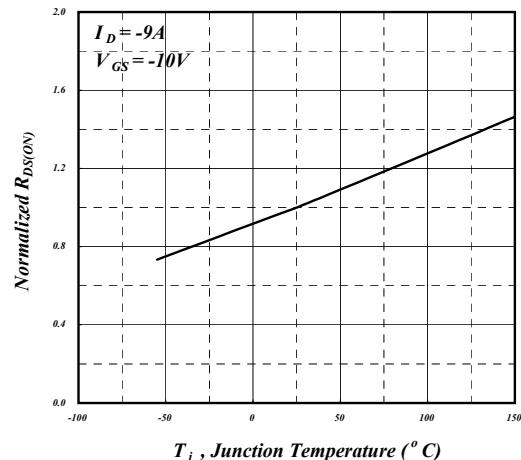

**Fig 4. Normalized On-Resistance v.s. Junction Temperature**

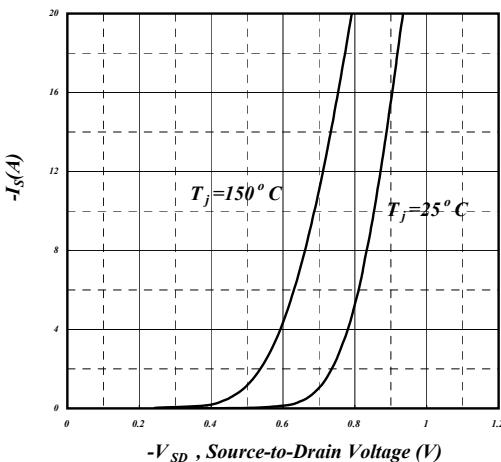

**Fig 5. Forward Characteristic of Reverse Diode**

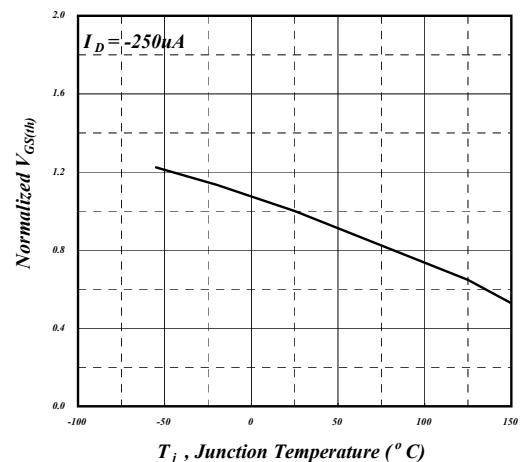

**Fig 6. Gate Threshold Voltage v.s. Junction Temperature**

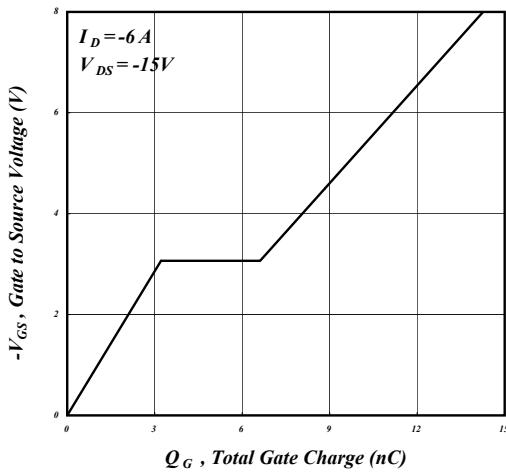


Fig 7. Gate Charge Characteristics

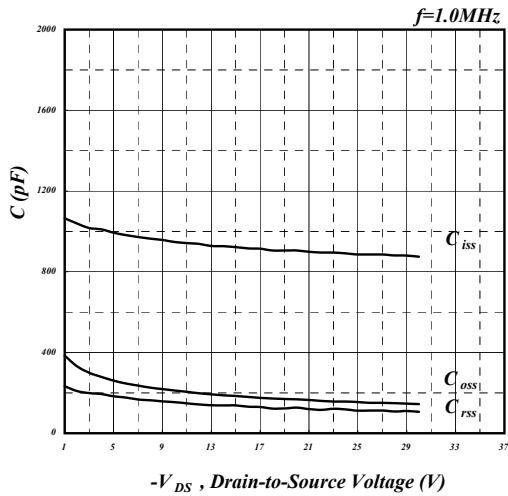


Fig 8. Typical Capacitance Characteristics

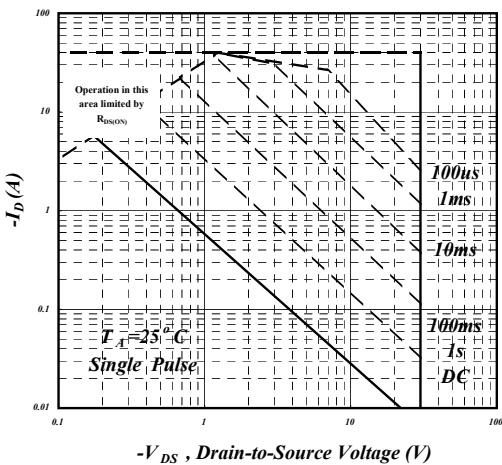


Fig 9. Maximum Safe Operating Area

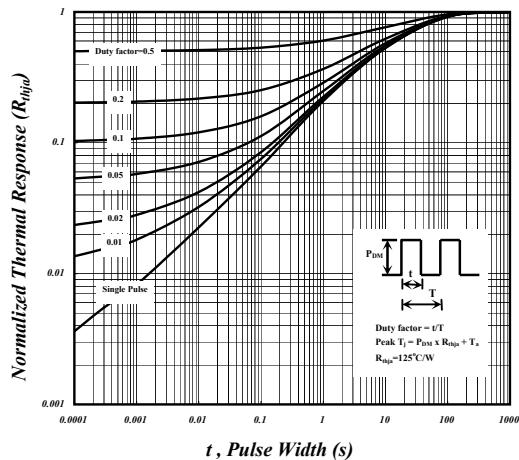


Fig 10. Effective Transient Thermal Impedance

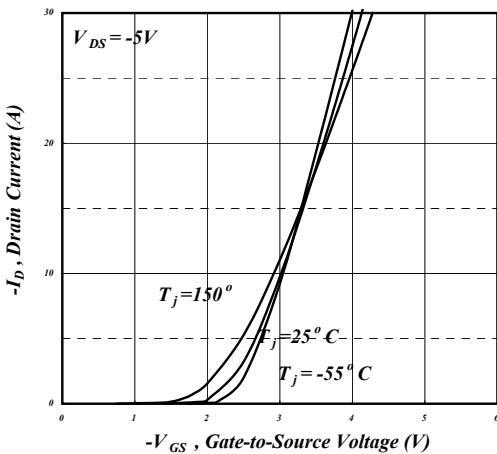


Fig 11. Transfer Characteristics



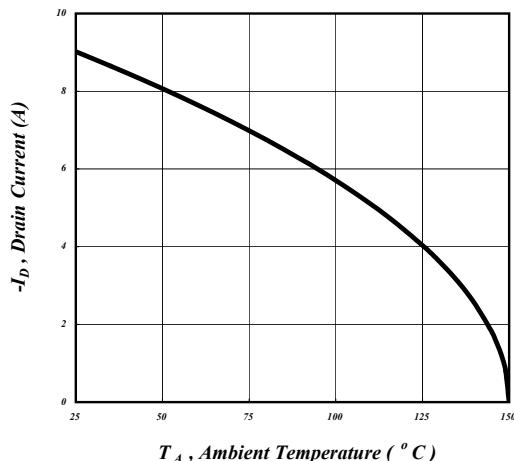



Fig 12. Drain Current v.s. Ambient Temperature

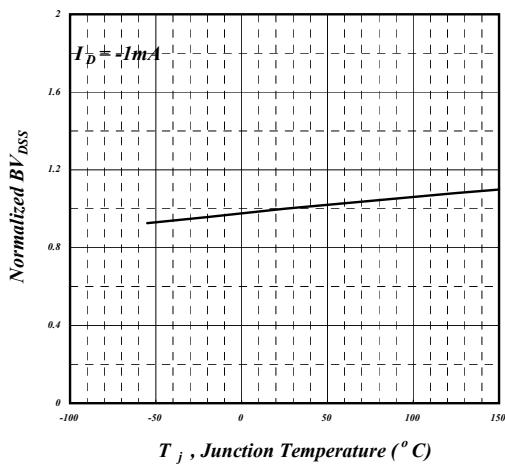

**Fig 13. Normalized  $BV_{DSS}$  v.s. Junction Temperature**

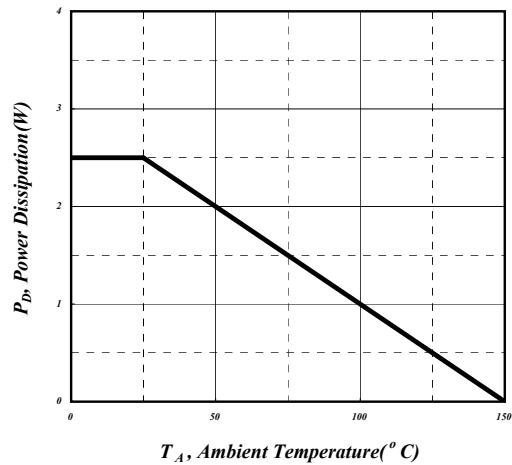

**Fig 14. Total Power Dissipation**

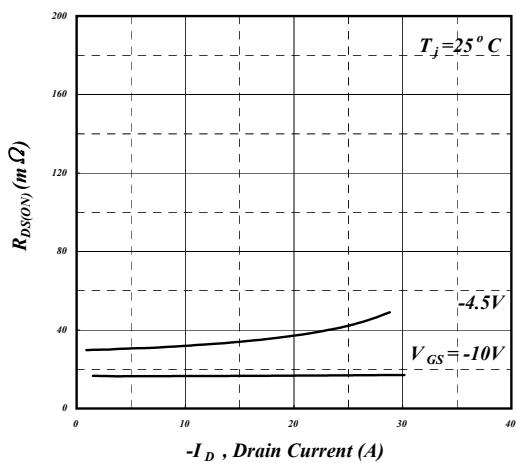

**Fig 15. Typ. Drain-Source on State Resistance**



**AP3P021M**

## **MARKING INFORMATION**

