



PRODUCT SUMMARY

| | | |
|---------------|--------------|-------|
| $V_{(BR)DSS}$ | $R_{DS(ON)}$ | I_D |
| 30V | 18mΩ | 7.7A |



G: GATE
D: DRAIN
S: SOURCE

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| PARAMETERS/TEST CONDITIONS | | SYMBOL | LIMITS | UNITS |
|--------------------------------------|--------------------------|----------------|------------|-------|
| Drain-Source Voltage | | V_{DS} | 30 | V |
| Gate-Source Voltage | | V_{GS} | ±20 | V |
| Continuous Drain Current | $T_A = 25^\circ\text{C}$ | I_D | 7.7 | A |
| | $T_A = 70^\circ\text{C}$ | | 6 | |
| Pulsed Drain Current ¹ | | I_{DM} | 28 | |
| Avalanche Current | | I_{AS} | 12.6 | |
| Avalanche Energy | L = 0.1mH | E_{AS} | 7.9 | mJ |
| Power Dissipation | $T_A = 25^\circ\text{C}$ | P_D | 1.8 | W |
| | $T_A = 70^\circ\text{C}$ | | 1.1 | |
| Junction & Storage Temperature Range | | T_J, T_{stg} | -55 to 150 | °C |

THERMAL RESISTANCE RATINGS

| THERMAL RESISTANCE | SYMBOL | TYPICAL | MAXIMUM | UNITS |
|---------------------|-----------------|---------|---------|--------|
| Junction-to-Ambient | $R_{\theta JA}$ | | 69 | °C / W |
| Junction-to-Case | $R_{\theta JC}$ | | 25 | |

¹Pulse width limited by maximum junction temperature.

²The value of $R_{\theta JA}$ is measured with the device mounted on 1in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$.

ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)


| PARAMETER | SYMBOL | TEST CONDITIONS | LIMITS | | | UNIT |
|---|---------------|---|--------|------|------|------|
| | | | MIN | TYP | MAX | |
| STATIC | | | | | | |
| Drain-Source Breakdown Voltage | $V_{(BR)DSS}$ | $V_{GS} = 0V, I_D = 250\mu A$ | 30 | | | V |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{DS} = V_{GS}, I_D = 250\mu A$ | 1.3 | 1.75 | 2.3 | |
| Gate-Body Leakage | I_{GSS} | $V_{DS} = 0V, V_{GS} = \pm 20V$ | | | ±100 | nA |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 24V, V_{GS} = 0V$ | | | 1 | μA |
| | | $V_{DS} = 20V, V_{GS} = 0V, T_J = 55^\circ\text{C}$ | | | 10 | |
| Drain-Source On-State Resistance ¹ | $R_{DS(ON)}$ | $V_{GS} = 4.5V, I_D = 6A$ | | 19 | 27 | mΩ |
| | | $V_{GS} = 10V, I_D = 7A$ | | 14 | 18 | |

| | | | | | | |
|--|-------------------|---------------------------------------|---|-----|-----|----------|
| Forward Transconductance ¹ | g_{fs} | $V_{DS} = 5V, I_D = 7A$ | | 33 | | S |
| DYNAMIC | | | | | | |
| Input Capacitance | C_{iss} | $V_{GS} = 0V, V_{DS} = 15V, f = 1MHz$ | | 329 | | pF |
| Output Capacitance | C_{oss} | | | 68 | | |
| Reverse Transfer Capacitance | C_{rss} | | | 48 | | |
| Gate Resistance | R_g | $V_{GS} = 0V, V_{DS} = 0V, f = 1MHz$ | | 2.5 | | Ω |
| Total Gate Charge ² | $Q_{g(VGS=10V)}$ | $V_{DS} = 15V, I_D = 7A$ | | 8.1 | | nC |
| | $Q_{g(VGS=4.5V)}$ | | | 4.5 | | |
| Gate-Source Charge ² | Q_{gs} | | | 1.1 | | |
| Gate-Drain Charge ² | Q_{gd} | | | 2.4 | | |
| Turn-On Delay Time ² | $t_{d(on)}$ | | $V_{DS} = 15V, I_D \cong 7A, V_{GS} = 10V, R_{GEN} = 6\Omega$ | | 15 | |
| Rise Time ² | t_r | | | 15 | | |
| Turn-Off Delay Time ² | $t_{d(off)}$ | | | 32 | | |
| Fall Time ² | t_f | | | 15 | | |
| SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 ° C) | | | | | | |
| Continuous Current | I_S | | | | 1.6 | A |
| Forward Voltage ¹ | V_{SD} | $I_F = 7A, V_{GS} = 0V$ | | | 1.1 | V |
| Diode Reverse Recovery Time | t_{rr} | $I_F = 7A, di/dt = 100A/\mu s$ | | 9 | | nS |
| Diode Reverse Recovery Charge | Q_{rr} | | | 3 | | nC |


¹Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

²Independent of operating temperature.


Output Characteristics

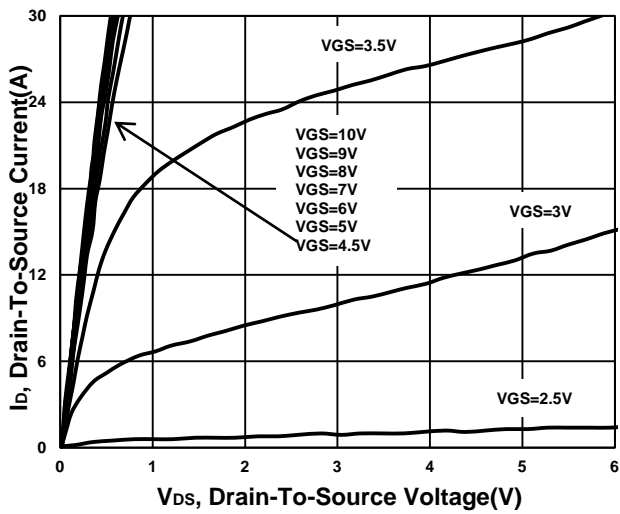


Transfer Characteristics

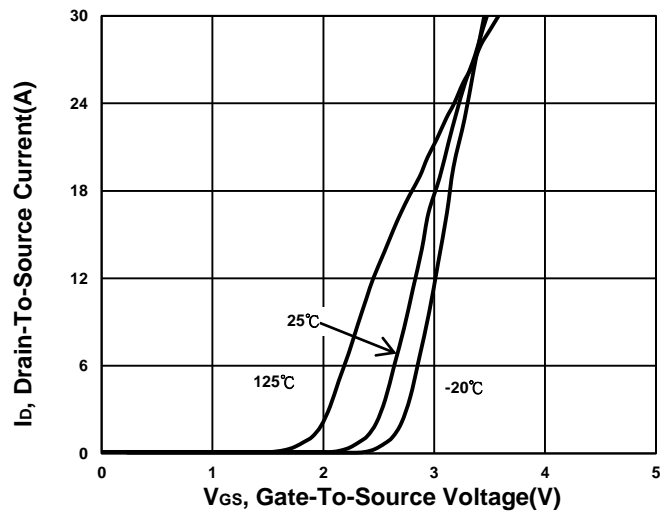


On-Resistance VS Temperature

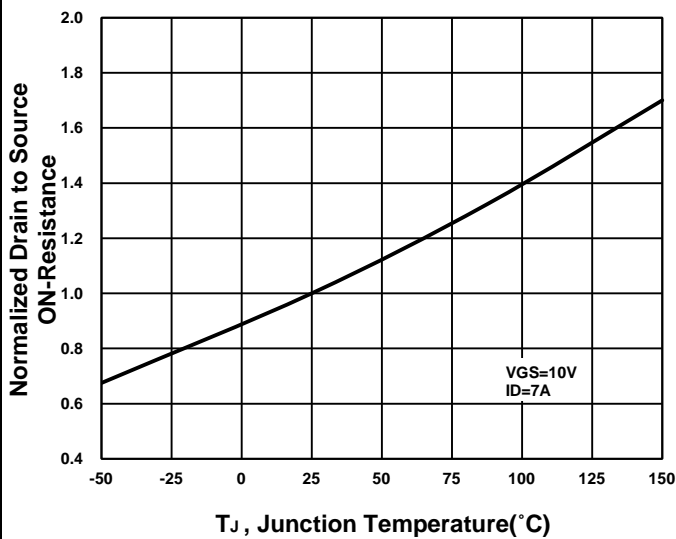


Capacitance Characteristic

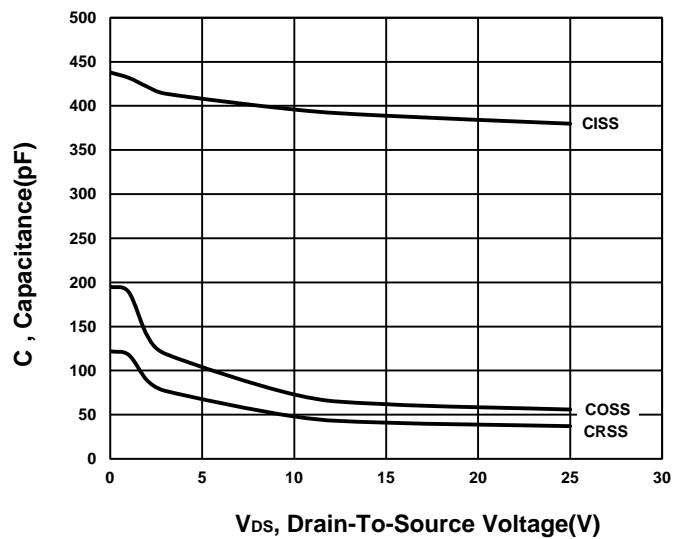


Gate charge Characteristics

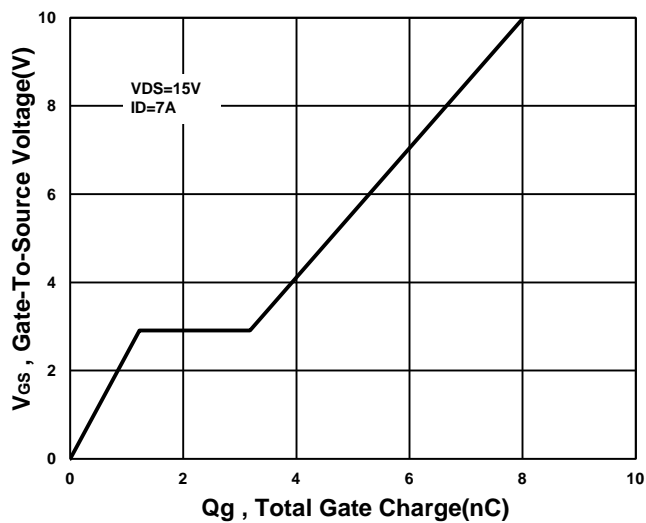


Source-Drain Diode Forward Voltage

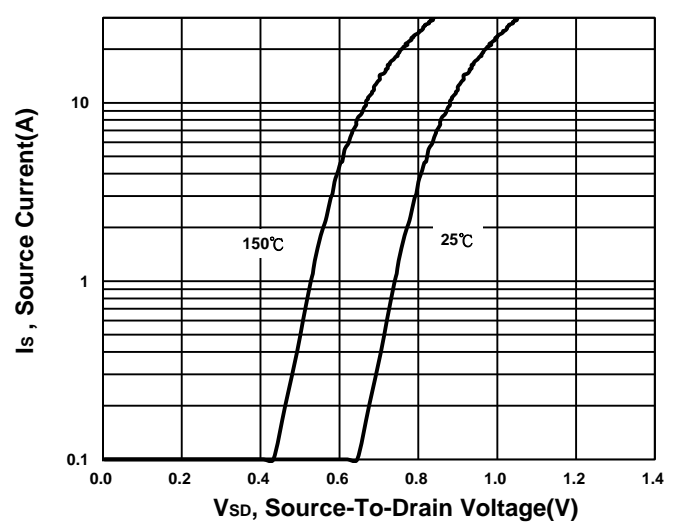

Safe Operating Area

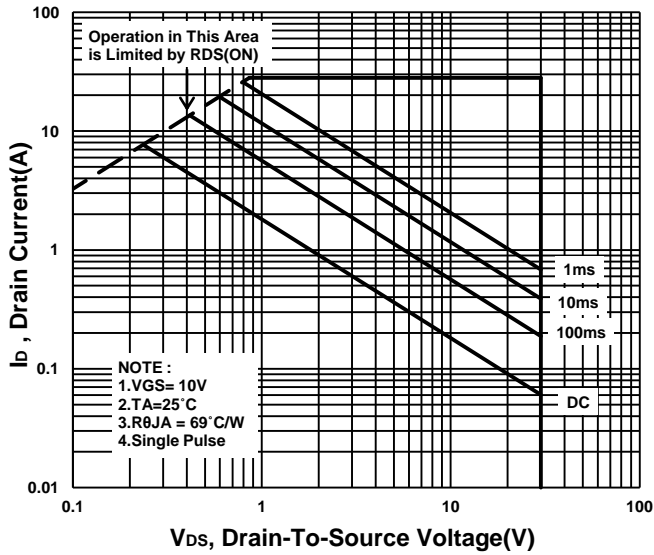

Single Pulse Maximum Power Dissipation

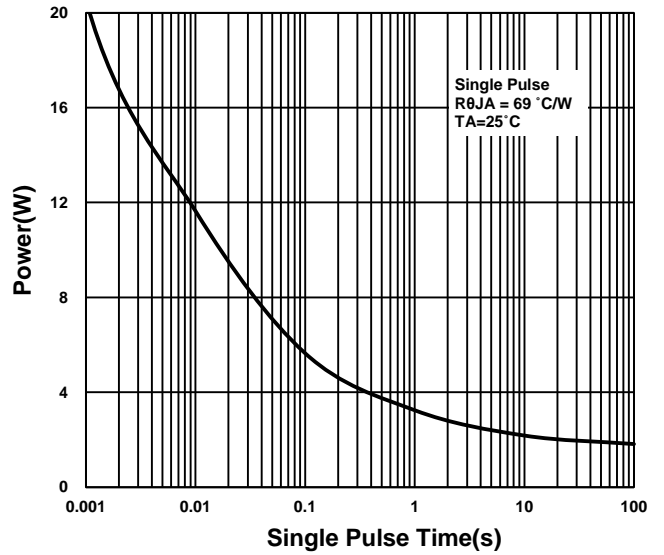

Transient Thermal Response Curve

