





PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
500V	0.24Ω	18A



- 1. GATE
- 2. DRAIN
- 3. SOURCE

ABSOLUTE MAXIMUM RATINGS(T_A=25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	500	V
Gate-Source Voltage		V_{GS}	±30	V
Continuous Drain Current ²	$T_C = 25\text{ °C}$	I_D	18	A
	$T_C = 100\text{ °C}$		11	
Pulsed Drain Current ¹		I_{DM}	67	
Avalanche Current ³		I_{AS}	10	A
Avalanche Energy ³		E_{AS}	500	mJ
Power Dissipation	$T_C = 25\text{ °C}$	P_D	62.5	W
	$T_C = 100\text{ °C}$		25	
Operating Junction & Storage Temperature Range		T_j, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		2	°C / W
Junction-to-Ambient	$R_{\theta JA}$		62.5	°C / W

¹Pulse width limited by maximum junction temperature.

²Ensure that the channel temperature does not exceed 150°C.

³ $V_{DD} = 50V$, $L = 10mH$,starting $T_j = 25\text{ °C}$.

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = 250\mu A$	500			V
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\mu A$	2	3	4	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 30V$			±100	nA
Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 500V, V_{GS} = 0V, T_C = 25\text{ °C}$			1	μA
		$V_{DS} = 400V, V_{GS} = 0V, T_C = 100\text{ °C}$			100	


Drain-Source On-State Resistance ¹	$R_{DS(ON)}$	$V_{GS} = 10V, I_D = 9A$		0.18	0.24	Ω
Forward Transconductance ¹	g_{fs}	$V_{DS} = 10V, I_D = 9A$		27		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 25V, f = 1MHz$		2872		pF
Output Capacitance	C_{oss}			310		
Reverse Transfer Capacitance	C_{rss}			21		
Total Gate Charge ²	Q_g	$V_{DD} = 400V, I_D = 18A, V_{GS} = 10V$		72		nC
Gate-Source Charge ²	Q_{gs}			14.7		
Gate-Drain Charge ²	Q_{gd}			25		
Turn-On Delay Time ²	$t_{d(on)}$	$V_{DD} = 250V, I_D = 18A, R_G = 25\Omega$		45		nS
Rise Time ²	t_r			60		
Turn-Off Delay Time ²	$t_{d(off)}$			241		
Fall Time ²	t_f			78		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25\text{ }^\circ\text{C}$)						
Continuous Current ³	I_S				18	A
Forward Voltage ¹	V_{SD}	$I_F = 18A, V_{GS} = 0V$			1.2	V
Reverse Recovery Time	t_{rr}	$I_F = 18A, di_F/dt = 100A / \mu S$		361		nS
Reverse Recovery Charge	Q_{rr}			4.3		uC

¹Pulse test : Pulse Width $\leq 380\ \mu\text{sec}$, Duty Cycle $\leq 2\%$.


²Independent of operating temperature.

³Pulse width limited by maximum junction temperature.


Output Characteristics

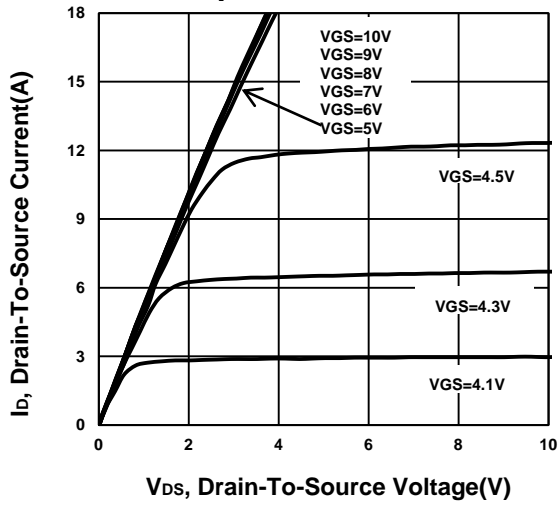


Transfer Characteristics

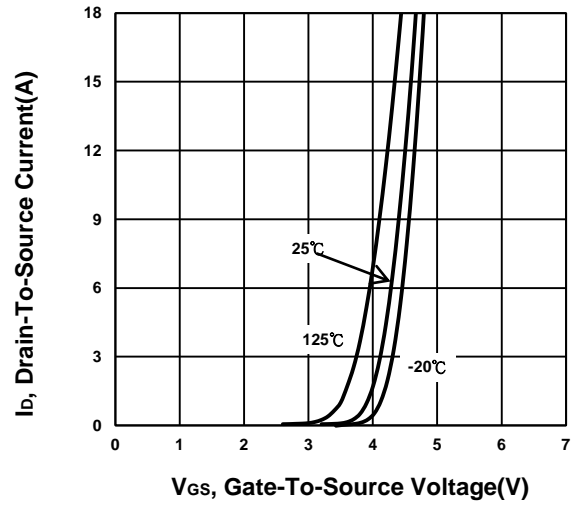


On-Resistance VS Gate-To-Source Voltage

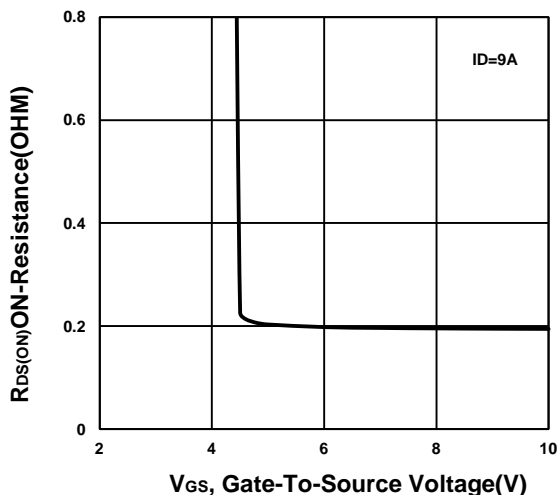


On-Resistance VS Drain Current

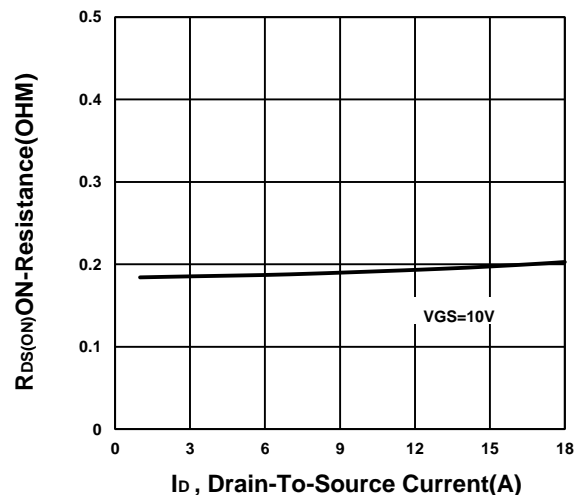


On-Resistance VS Temperature

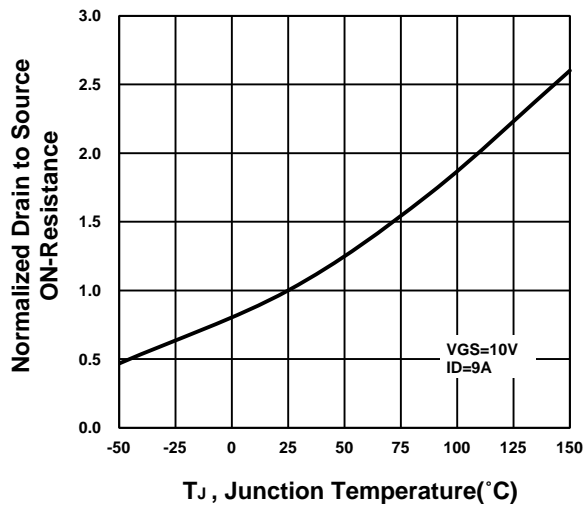


Capacitance Characteristic

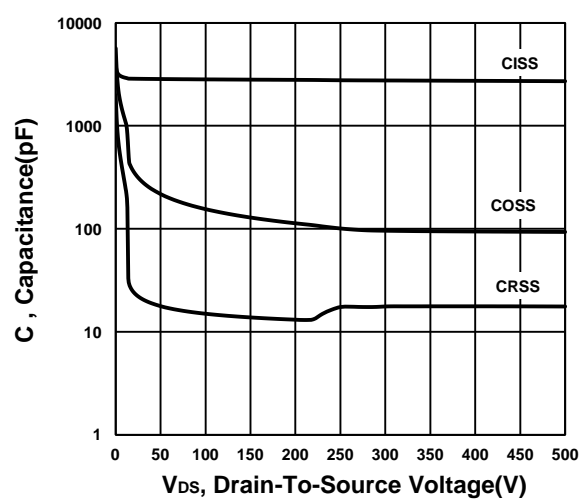


Gate charge Characteristics

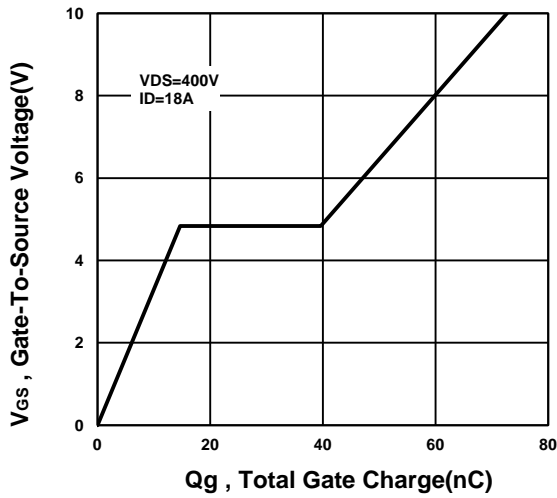


Source-Drain Diode Forward Voltage

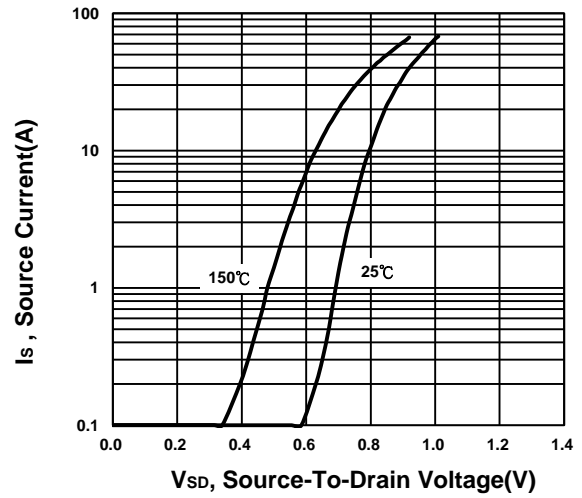

Safe Operating Area

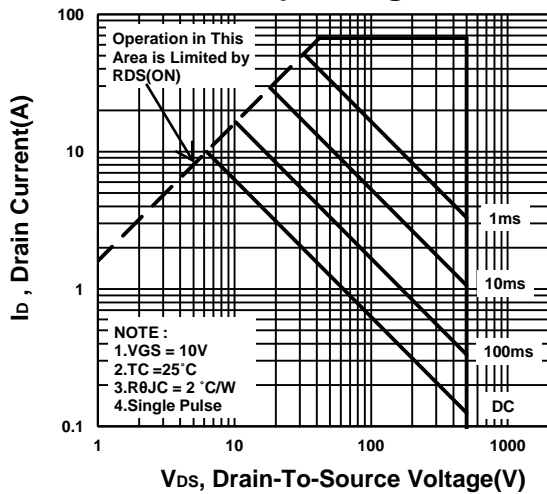

Single Pulse Maximum Power Dissipation

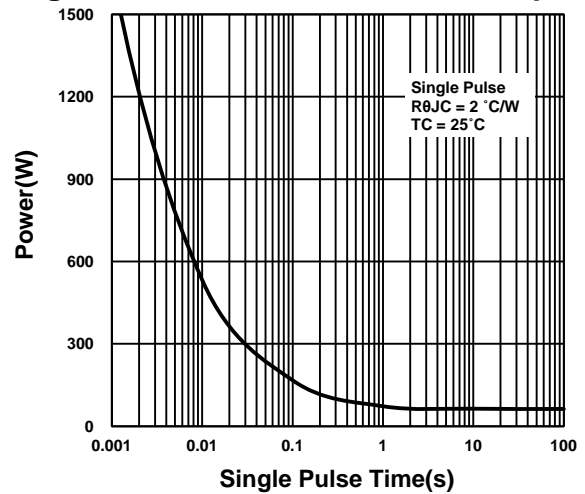

Transient Thermal Response Curve

