



NIKO-SEM
**N-Channel Enhancement Mode
Field Effect Transistor**
PD606BA

TO-252

Halogen-Free & Lead-Free

**PRODUCT SUMMARY**

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
30V	18mΩ	24A


1. GATE
2. DRAIN
3. SOURCE
ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

100% RG Test , 100% UIL Test

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	± 20	V
Continuous Drain Current	$T_C = 25^\circ\text{C}$	I_D	24	A
	$T_C = 100^\circ\text{C}$		15	
Pulsed Drain Current ¹		I_{DM}	60	A
Avalanche Current		I_{AS}	12.7	
Avalanche Energy	$L = 0.1\text{mH}$	E_{AS}	8.1	mJ
Power Dissipation	$T_C = 25^\circ\text{C}$	P_D	19.5	W
	$T_C = 100^\circ\text{C}$		7.8	
Junction & Storage Temperature Range		T_J, T_{stg}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		6.4	°C / W
Junction-to-Ambient	$R_{\theta JA}$		62.5	

¹Pulse width limited by maximum junction temperature.
ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{V}, I_D = 250\mu\text{A}$	30			V
Gate Threshold Voltage	$V_{GS(\text{th})}$	$V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	1.3	1.75	2.3	
Gate-Body Leakage	I_{GSS}	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$			± 100	nA
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 24\text{V}, V_{GS} = 0\text{V}$			1	μA
		$V_{DS} = 20\text{V}, V_{GS} = 0\text{V}, T_J = 125^\circ\text{C}$			10	
Drain-Source On-State Resistance ¹	$R_{DS(\text{ON})}$	$V_{GS} = 4.5\text{V}, I_D = 6\text{A}$		20	27	$\text{m}\Omega$
		$V_{GS} = 10\text{V}, I_D = 7\text{A}$		13.5	18	

NIKO-SEM
**N-Channel Enhancement Mode
Field Effect Transistor**
PD606BA

TO-252

Halogen-Free & Lead-Free

Forward Transconductance ¹	g_{fs}	$V_{DS} = 5V, I_D = 7A$		33		S
DYNAMIC						
Input Capacitance	C_{iss}	$V_{GS} = 0V, V_{DS} = 15V, f = 1MHz$		328		pF
Output Capacitance	C_{oss}			64		
Reverse Transfer Capacitance	C_{rss}			42		
Gate Resistance	R_g	$V_{GS} = 0V, V_{DS} = 0V, f = 1MHz$		3		Ω
Total Gate Charge ²	Q_g	$V_{GS} = 10V, V_{DS} = 15V, I_D = 7A$		7.6		nC
Gate-Source Charge ²	Q_{gs}			1.1		
Gate-Drain Charge ²	Q_{gd}			2.5		
Turn-On Delay Time ²	$t_{d(on)}$	$V_{DS} = 15V$ $I_D \approx 7A, V_{GS} = 10V, R_{GEN} = 6\Omega$		19		nS
Rise Time ²	t_r			18		
Turn-Off Delay Time ²	$t_{d(off)}$			39		
Fall Time ²	t_f			20		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS ($T_J = 25^\circ C$)						
Continuous Current	I_S				17	A
Forward Voltage ¹	V_{SD}	$I_F = 7A, V_{GS} = 0V$			1.1	V
Reverse Recovery Time	t_{rr}	$I_F = 7A, dI_F/dt = 100A/\mu S$		8.4		nS
Reverse Recovery Charge	Q_{rr}			2.2		nC


¹Pulse test : Pulse Width $\leq 300 \mu sec$, Duty Cycle $\leq 2\%$.²Independent of operating temperature.

NIKO-SEM


**N-Channel Enhancement Mode
Field Effect Transistor**

PD606BA
TO-252
Halogen-Free & Lead-Free


Output Characteristics

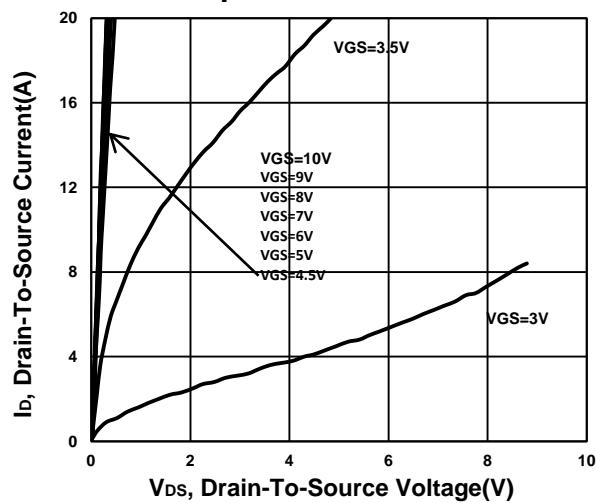


Transfer Characteristics

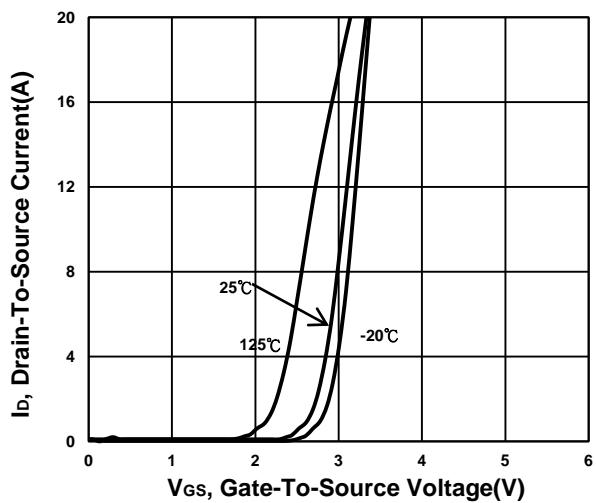


On-Resistance VS Gate-To-Source

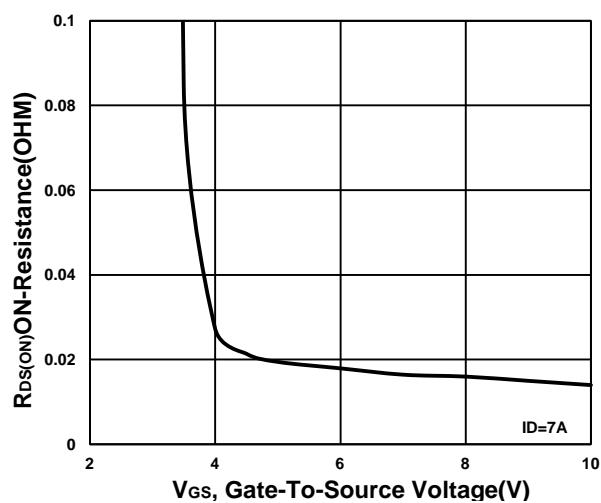


On-Resistance VS Drain Current

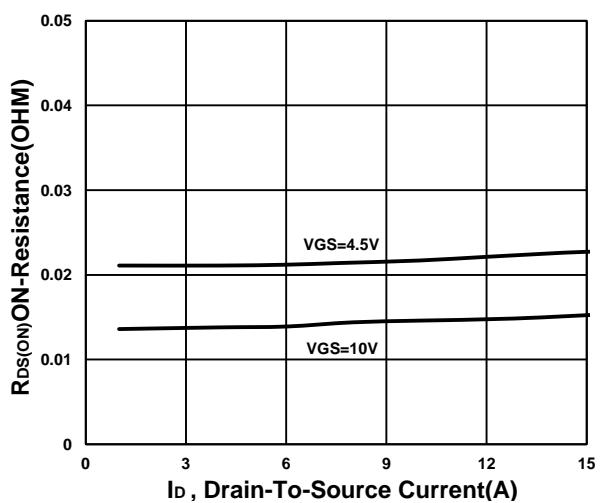

On-Resistance VS Temperature

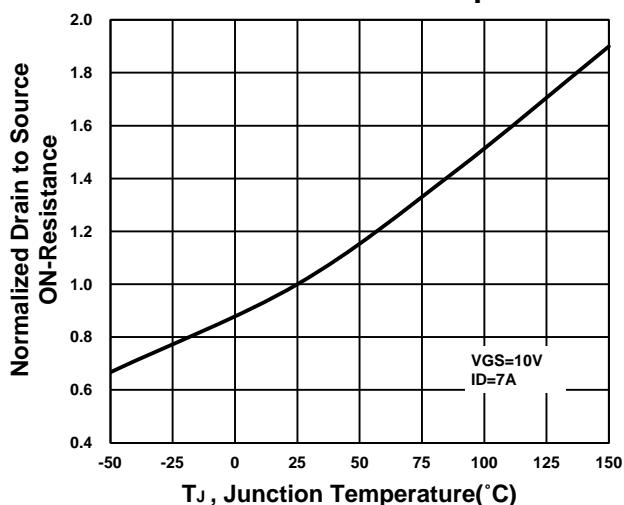

Capacitance Characteristic

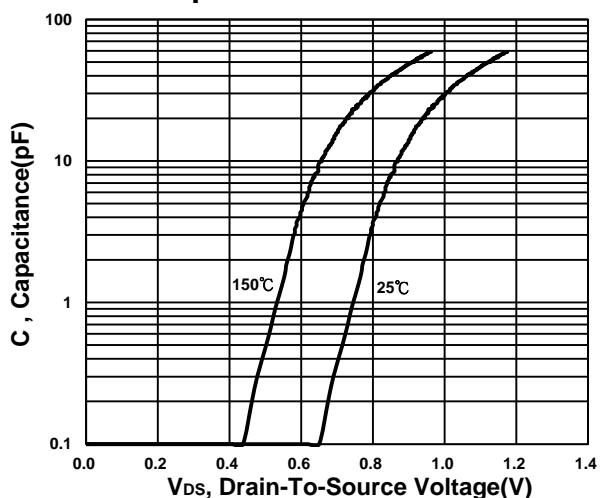


NIKO-SEM


**N-Channel Enhancement Mode
Field Effect Transistor**

PD606BA
TO-252
Halogen-Free & Lead-Free


Gate charge Characteristics

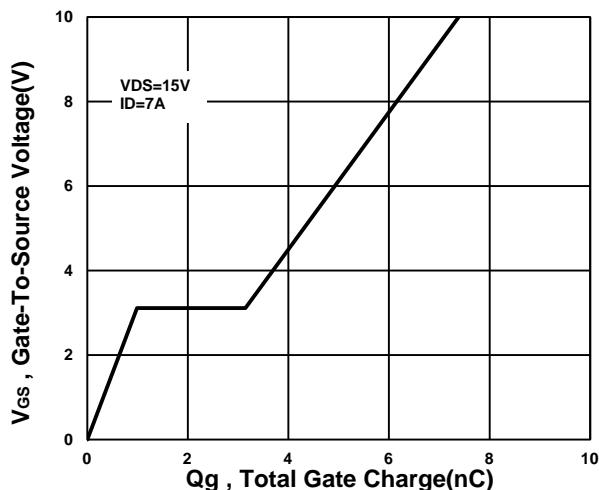


Source-Drain Diode Forward Voltage

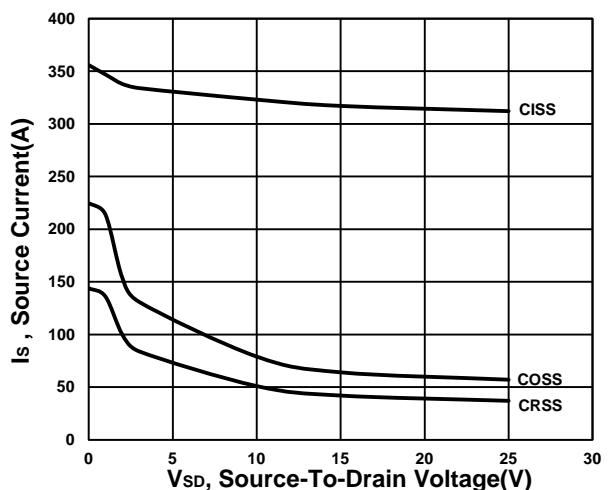

Safe Operating Area

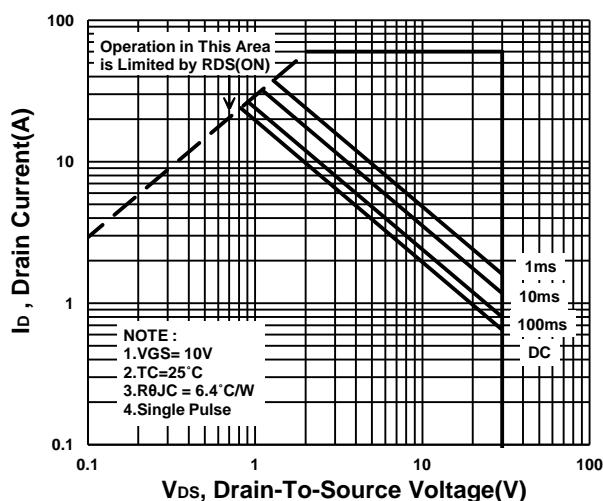

Single Pulse Maximum Power Dissipation

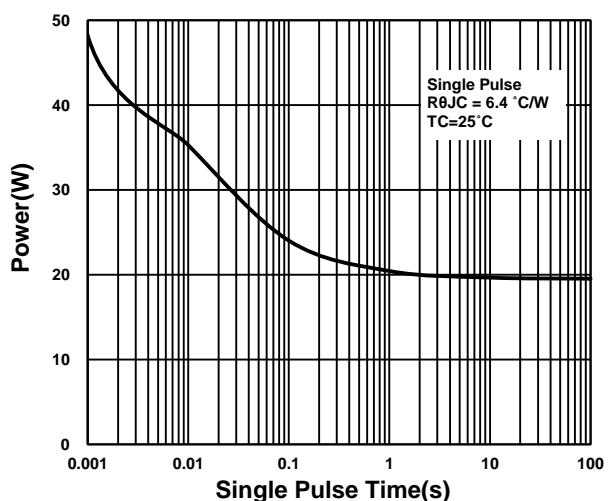

Transient Thermal Response Curve

