

Low-Noise Boost DC-DC Converter

Description

The FP6795 is a step-up current mode PWM DC/DC converter with an internal 2A, 0.16Ω N-channel MOSFET. Pin selectable fixed switching frequency (1.2MHz or 640KHz) and external compensation pin provide the user flexibility in setting the loop dynamic, allowing the use of tiny, low profile inductors and low value, low ESR ceramic output capacitors.

The FP6795 provides soft-start feature which is programmable with an external capacitor. In shutdown mode, current consumption is reduced to only 0.1µA. The FP6795 converts the input voltage ranged from 2.6V to 5.5V into an output voltage up to 16V.

FP6795 is available in the space-saving MSOP-8 package.

Features


- Operating Voltage from 2.6V to 5.5V
- Output Voltage from Input Voltage to 16V
- 90% Efficiency
- 2A, 0.16Ω Internal Power MOSFET
- Pin Selectable Switching Frequency (1.2MHz or 640kHz)
- Programmed Soft Start
- External Compensation Network
- 0.1µA Shutdown Current
- MSOP-8 Package
- RoHS Compliant

Applications


- LCD Display
- Portable Application
- Hand-Held Device
- Digital Camera

Pin Assignments

MS Package (MSOP-8)

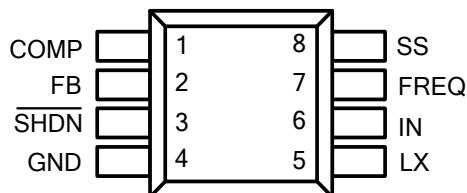

MP Package (MSOP-8 Exposed Pad)

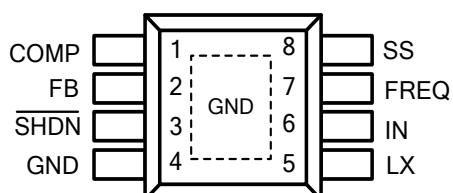

Ordering Information

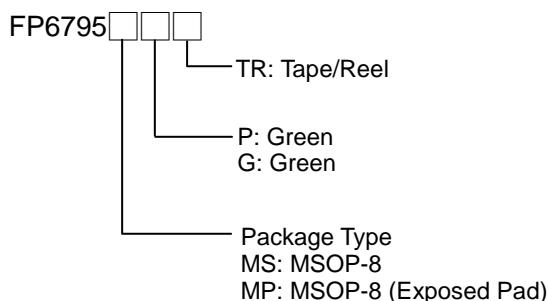


Figure 1. Pin Assignment of FP6795 (Top View)

Typical Application Circuit

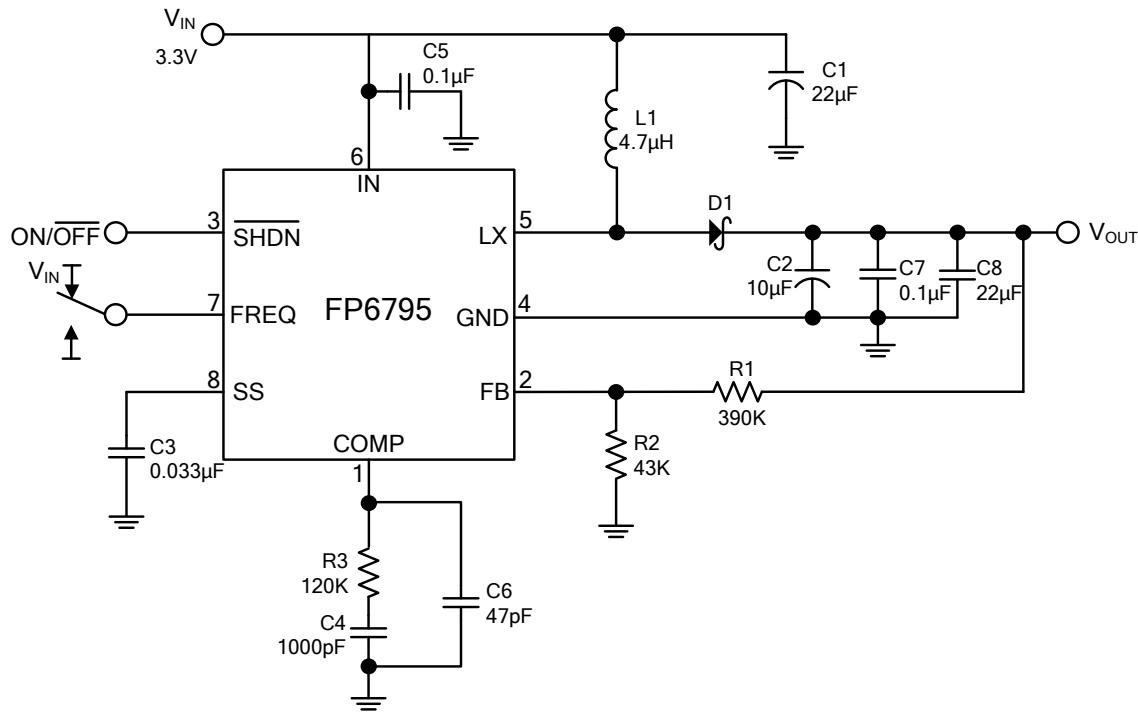


Figure 2. Typical Application Circuit of FP6795

V_{IN} (V)	V_{OUT} (V)	f_{osc} (kHz)	L (µH)	C_{OUT} (µF)	R3 (kΩ)	C4 (pF)	C6 (pF)	$I_{OUT(MAX)}$ (mA)
3.3	12.5	640	10 (TDK SLF7045)	33 (Ceramic)	120	1000	47	300
3.3	12.5	1200	6.8 (TDK SLF7045)	33 (Ceramic)	200	680	33	300

Functional Pin Description

Pin Name	Pin Function
COMP	Compensation Pin for Error Amplifier. Connect a series RC from COMP to ground.
FB	Feedback Pin. The typical reference voltage is 1.24V. Set $V_{OUT} = 1.24V (1 + R1/R2)$. See Figure 2.
SHDN	Enable Pin. Connect SHDN low to turn off FP6795.
GND	Ground.
LX	Switching Pin.
IN	Power Input Pin.
FREQ	Frequency Select Pin. When FREQ is connected to ground, the frequency is 640kHz. When FREQ is connected to V_{IN} , the frequency is 1.2MHz.
SS	Soft-Start Control Pin. Connect a capacitor (C3) to this pin. The pin will source 4µA constant current to charge the capacitor. Leave this pin floating for not using soft-start.

Block Diagram

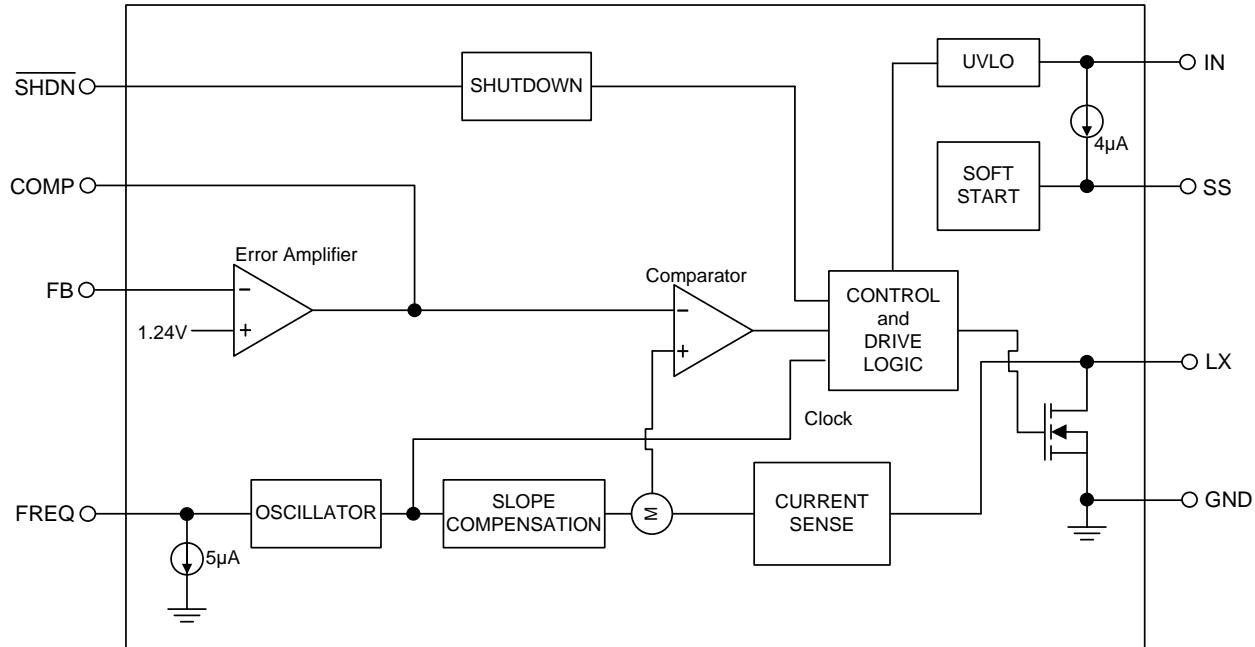


Figure 3. Block Diagram of FP6795

Absolute Maximum Ratings

- VIN to GND ----- -0.3V to +6V
- LX to GND ----- -0.3V to +18V
- SHDN, FB, SS, FREQ, COMP to GND ----- -0.3V to +6V
- Power Dissipation @ $T_A=25^\circ\text{C}$ (P_D)
 - MSOP-8 ----- 0.63W
 - MSOP-8 (Exposed Pad) ----- 0.91W
- Package Thermal Resistance (θ_{JA})
 - MSOP-8 ----- +160°C/W
 - MSOP-8 (Exposed Pad) ----- +110°C/W
- Junction Temperature ----- +150°C
- Storage Temperature Range ----- -65°C to +150°C
- Lead Temperature (Soldering, 10sec.) ----- 260°C

Note 1 : Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device.

Recommended Operating Conditions

- Supply Voltage, V_{IN} ----- 3.3V \pm 10%, 5V \pm 10%
- Max. Output Voltage ----- 16V
- Operation Temperature Range ----- -40°C to +85°C

Electrical Characteristics

($V_{IN}=3V$, $\overline{SHDN}=3V$, $FREQ=GND$, $T_A=25^\circ C$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
INPUT						
Operation Voltage Range	V_{IN}		2.6		5.5	V
V_{IN} Under Voltage Lockout	UVLO	V_{IN} rising, typical hysteresis is 100mV	2.25	2.38	2.52	V
Quiescent Current	I_{IN}	$V_{FB}=1.3V$, not switching		160	350	μA
		$V_{FB}=1V$, switching		0.8	5	mA
Shutdown Current	I_{SD}	$SHDN=0V$		0.1	10	μA
ERROR AMPLIFIER						
Feedback Voltage	V_{FB}		1.227	1.24	1.253	V
FB Input Bias Current	I_{FB}	$V_{FB}=1.24V$		0	150	nA
Feedback Voltage Line Regulation		$2.6V < V_{IN} < 5.5V$		0.08	0.3	%/V
Transconductance (Note2)	gm	$\Delta I = 5\mu A$	70	170	240	μS
Voltage Gain (Note2)	A_V			700		V/V
OSCILLATOR						
Frequency	F_{OSC}	$FREQ=GND$	540	640	740	kHz
		$FREQ=V_{IN}$	1000	1200	1500	kHz
Maximum Duty Cycle	T_{DUTY}	$FREQ=GND$		90		%
		$FREQ=V_{IN}$		90		%
N-CHANNEL SWITCH						
Current Limit (Note2)	I_{LIM}		1.5	2	2.5	A
On-Resistance (Note2)	R_{ON}	$I_{LX}= 200mA$		0.16	0.35	Ω
Leakage Current	I_{LXOFF}	$V_{LX}=16V$		0.01	30	μA
SOFT-START						
Reset Switching Resistance					100	Ω
Charge Current	I_{SS}	$V_{SS}=1.2V$	1.5	4	7	μA
CONTROL INPUTS						
Input High Level	VIH	$SHDN$, $FREQ$	$0.7*V_{IN}$			V
Input Low Level	VIL	$SHDN$, $FREQ$			$0.3*V_{IN}$	V
Hysteresis		$SHDN$, $FREQ$		$0.1*V_{IN}$		V
Frequency Pull-down Current	I_{FREQ}		1.8	5	9	μA
$SHDN$ Input Current	I_{SHDN}			0.001	1	μA
PROTECTION						
Thermal Shutdown Temperature (Note2)	T_{SD}			160		$^\circ C$
	ΔT_{SD}	Hysteresis		25		$^\circ C$

Note 2 : Guarantee by design.

Typical Performance Curves

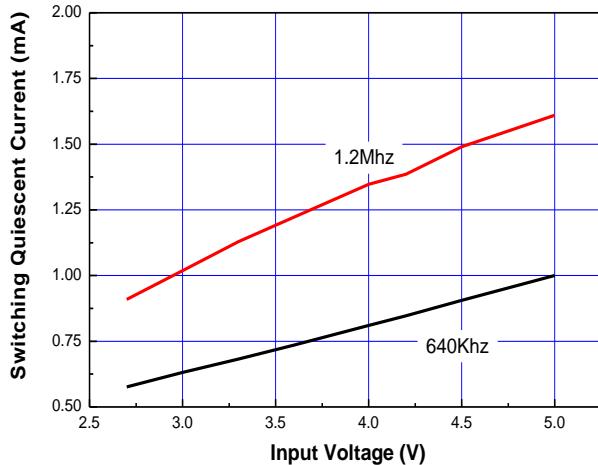


Figure 4. Switching Quiescent Current vs. Input Voltage

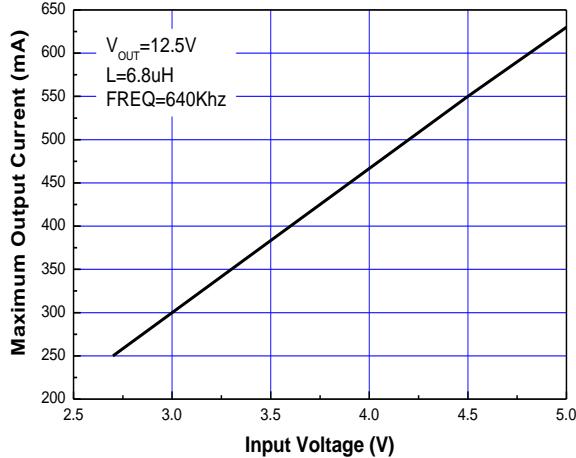


Figure 5. Maximum Output Current vs. Input Voltage

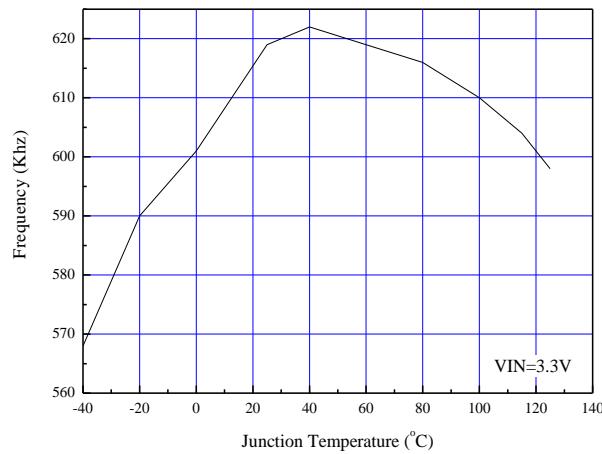


Figure 6. Frequency vs. Junction Temperature

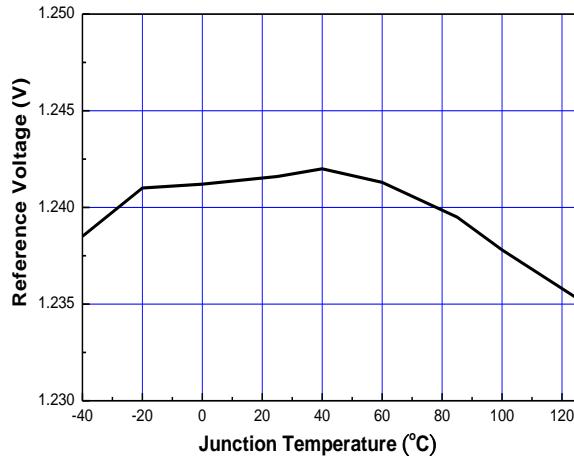


Figure 7. Reference Voltage vs. Junction Temperature


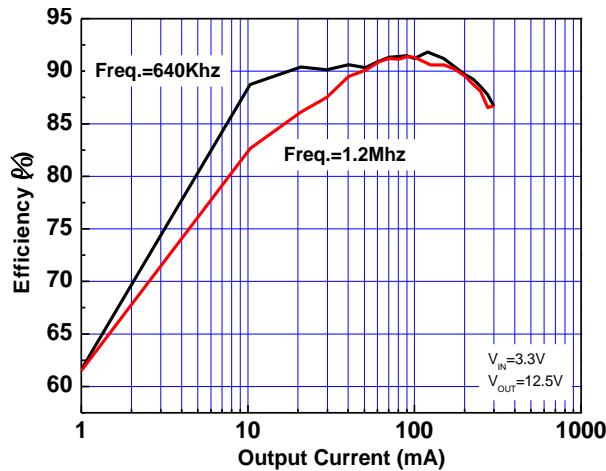



Figure 8. Efficiency vs. Output Current

Typical Performance Curves (Continued)

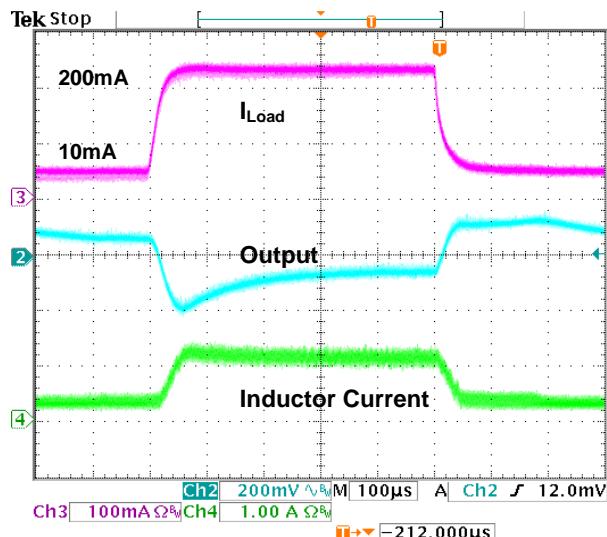


$V_{IN}=3.3V$, $V_{OUT}=12.5V$, FREQ=640kHz, $C_{OUT}=33\mu F$

Figure 9. Load transient Response

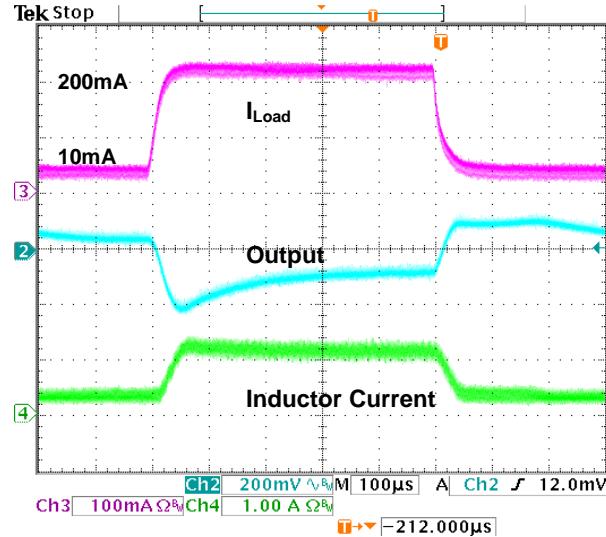


$V_{IN}=3.3V$, $V_{OUT}=12.5V$, FREQ=1.2MHz, $C_{OUT}=33\mu F$

Figure 10. Load transient Response

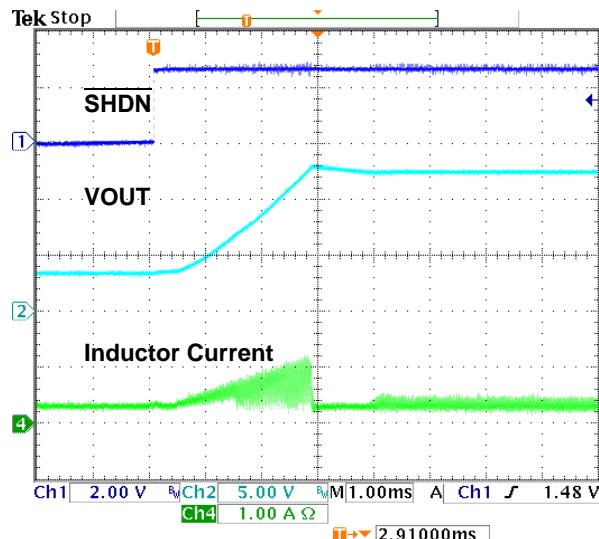

$V_{IN}=3.3V$, $V_{OUT}=12.5V$, $I_{OUT}=10mA$, $L=10\mu H$, $C_3=33nF$, FREQ=640KHz, $C_{OUT}=33\mu F$


Figure 11. Start-up Waveform with Soft-start

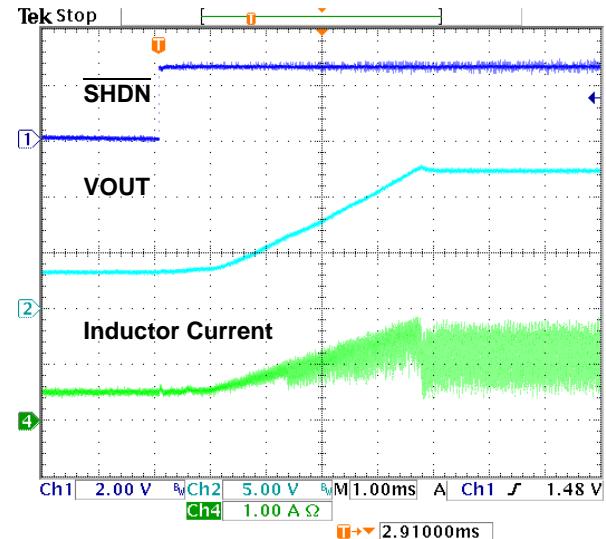

$V_{IN}=3.3V$, $V_{OUT}=12.5V$, $I_{OUT}=200mA$, $L=10\mu H$, $C_3=33nF$, FREQ=640KHz, $C_{OUT}=33\mu F$


Figure 12. Start-up Waveform with Soft-start

Typical Performance Curves (Continued)

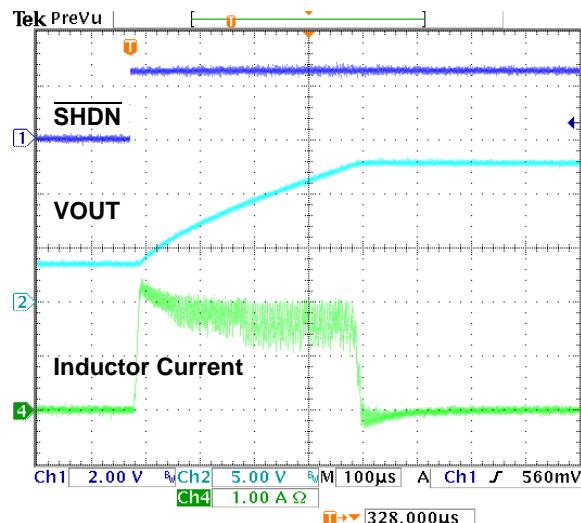

$V_{IN}=3.3V$, $V_{OUT}=12.5V$, $I_{OUT}=10mA$, $L=10\mu H$, $C_3=33nF$,
 $FREQ=640KHz$, $C_{OUT}=33\mu F$,

Figure 13. Start-up Waveform without Soft-start

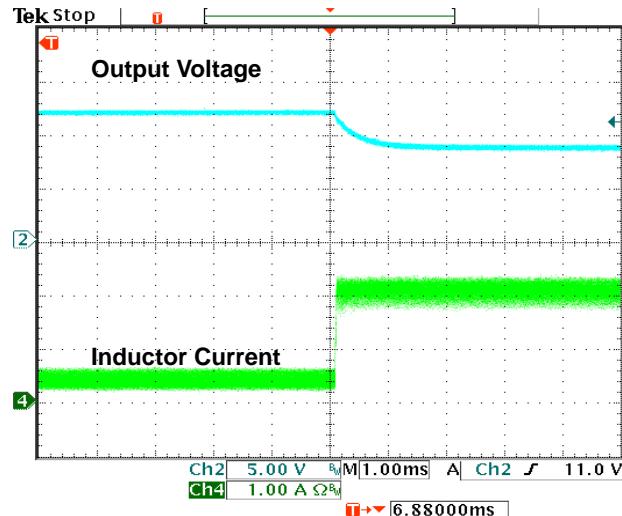


$V_{IN}=3.3V$, $V_{OUT}=12.5V$, $I_{OUT}=10mA$, $L=10\mu H$,
 $C_3=33nF$, $FREQ=640KHz$, $C_{OUT}=33\mu F$,


Figure 14. OCP Waveform

Outline Information


MSOP-8 Package (Unit: mm)

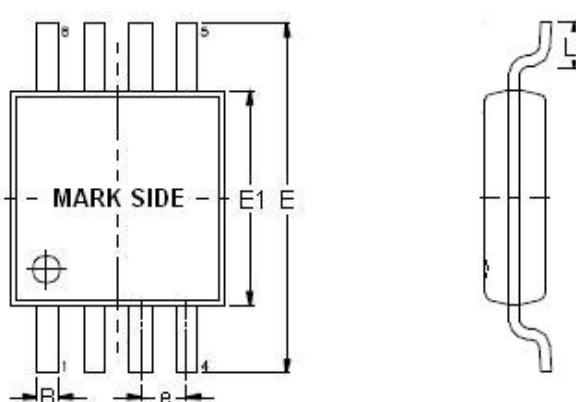

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.75	1.10
A1	0.00	0.15
A2	0.75	0.95
B	0.25	0.35
D	2.90	3.10
E	4.80	5.00
E1	2.90	3.10
e	0.60	0.70
L	0.40	0.80




Carrier Dimensions

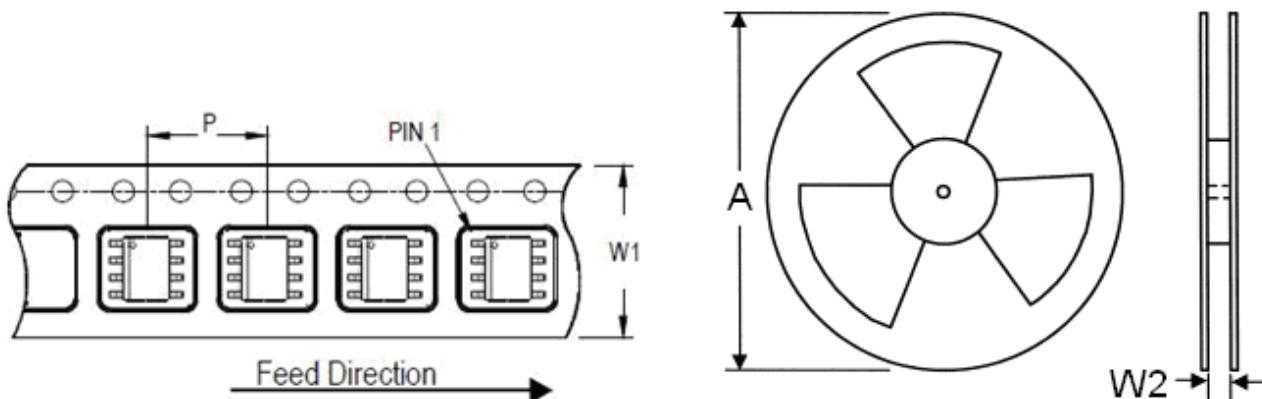


Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
12	8	13	330	12.4	400~1000	3,000

Outline Information (Continued)


MSOP-8 (Exposed Pad) Package (Unit: mm)

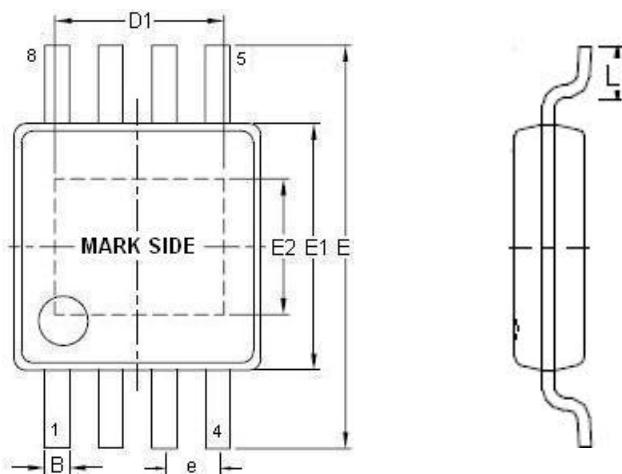

SYMBOLS UNIT	DIMENSION IN MILLIMETER	
	MIN	MAX
A	0.75	1.10
A1	0.00	0.15
A2	0.75	0.95
B	0.22	0.38
D	2.90	3.10
D1	0.75	2.50
E	4.80	5.00
E1	2.90	3.10
E2	0.75	2.50
e	0.55	0.75
L	0.40	0.80



Carrier Dimensions

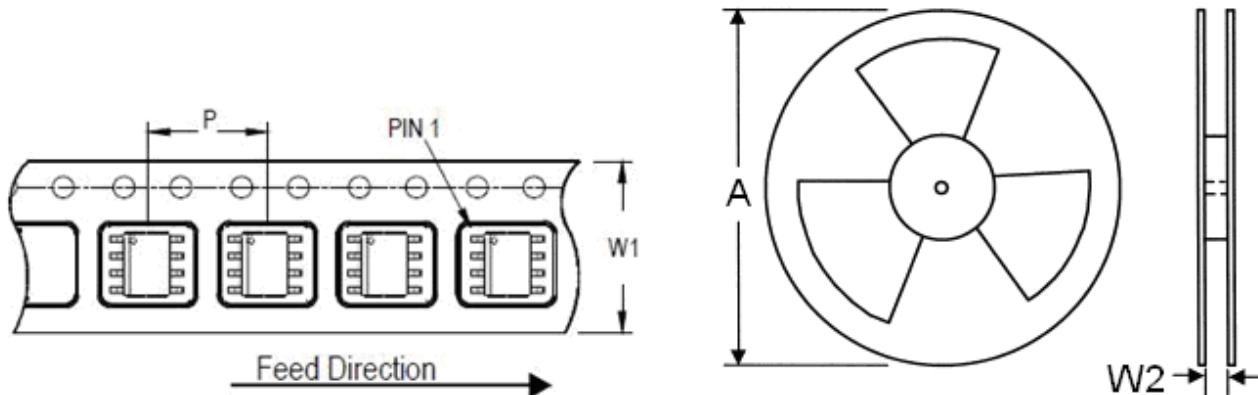

Tape Size (W1) mm	Pocket Pitch (P) mm	Reel Size (A)		Reel Width (W2) mm	Empty Cavity Length mm	Units per Reel
		in	mm			
12	8	13	330	12.4	400~1000	3,000

Life Support Policy

Fitipower's products are not authorized for use as critical components in life support devices or other medical systems.