

STTH60R04

Ultrafast recovery diode

Main product characteristics

I _{F(AV)}	60 A
V _{RRM}	400 V
Tj	175° C
V _F (typ)	0.95 V
t _{rr (typ)}	31 ns


Features and benefits

- Very low switching losses
- High frequency and/or high pulsed current operation
- High junction temperature

Description

The STTH60R04 series uses ST's new 400 V planar Pt doping technology. The STTH60R04 is specially suited for switching mode base drive and transistor circuits.

Available in a through-the-hole package, this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection.

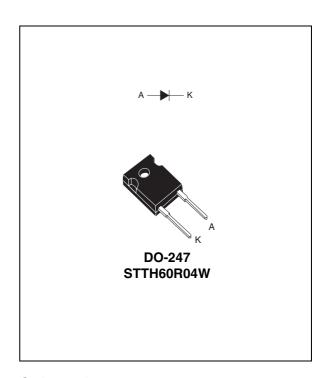

Order codes

Part Number	Marking		
STTH60R04W	STTH60R04W		

Table 1. Absolute ratings (limiting values at 25° C, unless otherwise specified)

Symbol	Parameter				Unit
V _{RRM}	Repetitive peak reverse voltage			400	V
V _{RSM}	Non repetitive peak reverse voltage			400	٧
I _{F(RMS)}	RMS forward current			100	Α
I _{F(AV)}	Average forward current, $\delta = 0.5$ $T_c = 110^{\circ} C$		60	Α	
I _{FRM}	Repetitive peak forward current $t_p = 5 \mu s F = 1 \text{ kHz square}$			375	Α
I _{FSM}	Surge non repetitive forward current $t_p = 10 \text{ ms Sinusoidal}$		650	Α	
T _{stg}	Storage temperature range			-65 to +175	° C
T _j	Operating junction temperature range			-40 to +175	° C

Characteristics STTH60R04

1 Characteristics

Table 2. Thermal parameters

Symbol	Parameter	Value	Unit
R _{th(j-c)}	Junction to case	0.7	°C/W

Table 3. Static electrical characteristics

Symbol	Parameter	Test conditions		Min	Тур	Max	Unit
I _R ⁽¹⁾	Reverse leakage current	T _j = 25° C	V- - V			60	μA
'R`	IR' / neverse leakage current	T _j = 125° C	$V_R = V_{RRM}$		60	600	μΑ
		T _j = 25° C				1.5	
V _F ⁽²⁾	Forward voltage drop	T _j = 100° C	I _F = 60 A		1.05	1.3	٧
		T _j = 150° C			0.95	1.2	

^{1.} Pulse test: t_p = 5 ms, δ < 2 %

To evaluate the conduction losses use the following equation:

 $P = 0.9 \times I_{F(AV)} + 0.005 \times I_{F^{2}(RMS)}$

Table 4. Dynamic characteristics

Symbol	Parameter	Test conditions	Min	Тур	Max	Unit
		$I_F = 1 \text{ A, } dI_F/dt = -50 \text{ A/}\mu\text{s,}$ $V_R = 30 \text{ V, } T_j = 25^{\circ} \text{ C}$			80	
t _{rr}	Reverse recovery time	$I_F = 1 \text{ A, } dI_F/dt = -100 \text{ A/}\mu\text{s,}$ $V_R = 30 \text{ V, } T_j = 25^{\circ} \text{ C}$		40	55	ns
		$I_F = 1 \text{ A, } dI_F/dt = -200 \text{ A/}\mu\text{s,}$ $V_R = 30 \text{ V, } T_j = 25^{\circ} \text{ C}$		31	45	
I _{RM}	Reverse recovery current	$I_F = 60 \text{ A}, dI_F/dt = -200 \text{ A/}\mu\text{s}, \ V_R = 320 \text{ V}, T_j = 125^{\circ} \text{ C}$		11	16	Α
S	Softness factor	$I_F = 60 \text{ A}, dI_F/dt = -200 \text{ A/}\mu\text{s}, \ V_R = 320 \text{ V}, T_j = 125^{\circ} \text{ C}$		0.4		
t _{fr}	Forward recovery time	$I_F = 60 \text{ A}, dI_F/dt = 100 \text{ A}/\mu\text{s}$ $V_{FR} = 1.1 \text{ x } V_{Fmax}, T_j = 25^{\circ} \text{ C}$		800		ns
V _{FP}	Forward recovery voltage	$I_F = 60 \text{ A}$ $dI_F/dt = 100 \text{ A/}\mu\text{s}$ $T_j = 25^{\circ} \text{ C}$		3.2		V

^{2.} Pulse test: t_p = 380 μ s, δ < 2 %

STTH60R04 Characteristics

Figure 1. Conduction losses versus average current




Figure 2. Forward voltage drop versus forward current





Figure 3. Relative variation of thermal impedance junction to case versus pulse duration

Figure 4. Peak reverse recovery current versus dl_F/dt (typical values)



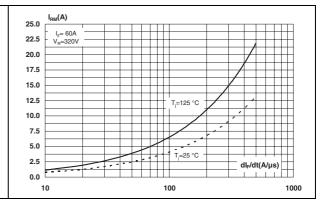


Figure 5. Reverse recovery time versus dl_F/dt (typical values)


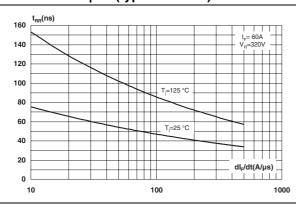



Figure 6. Reverse recovery charges versus dl_F/dt (typical values)



Characteristics STTH60R04

Figure 7. Relative variations of dynamic parameters versus junction temperature

Figure 8. Transient peak forward voltage versus dl_F/dt (typical values)





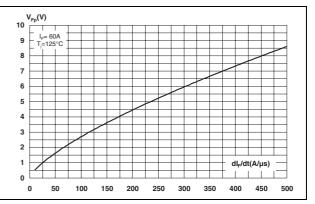


Figure 9. Forward recovery time versus dI_F/dt Figure 10. Junc (typical values)

Junction capacitance versus reverse voltage applied (typical values)





4/7


STTH60R04 Package information

2 Package information

Epoxy meets UL94, V0

Cooling method: by conduction (C)
Recommended torque value: 0.8 Nm
Maximum torque value: 1.0 Nm

Table 5. DO-247 dimensions

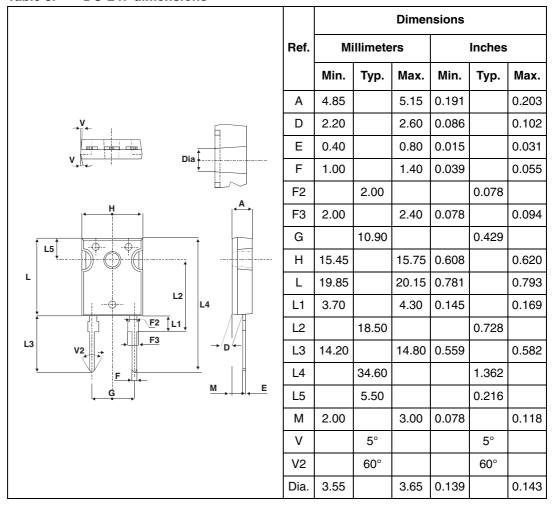

In order to meet environmental requirements, ST offers these devices in ECOPACK® packages. These packages have a lead-free second level interconnect. The category of second level interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.

577

Ordering information STTH60R04

3 Ordering information

Part Number	Marking	Package	Weight	Base qty	Delivery mode
STTH60R04W	STTH60R04W	DO-247	4.40 g	30	Tube

4 Revision history

Date	Revision	Description of Changes
31-Mar-2007	1	First issue

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

