



Typical Features

- ◆ Wide input voltage range: 85-265VAC/120-380VDC
- ◆ No load power consumption≤0.45W
- ◆ Transfer efficiency (typ. 84%)
- ◆ Switching Frequency: 65KHz
- ◆ Protections: Short Circuit, over current
- ◆ Isolation 3000Vac
- ◆ Meet IEC60950/UL60950/EN60950 Standard
- ◆ 6 side shield plastic case, meet UL94 V-0
- ◆ Conform to CE/RoHS standard
- ◆ PCB mounting



Application Field

FA10-220SXXC2N3 Series----- a compact size, high efficient, meet CE standard power converter offered by Aipu. It features universal input voltage, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, good EMC performance, meet EN55032,IEC/EN61000 standard. It widely used in power, industrial, instrument and smart home applications. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typical Product List

	Model	Output Specification				Max.	Ripple&	Efficiency@	
Certifi cate		Power	Voltage 1	Current 1	Voltage 2	Current 2	Capacitive Load	Noise 20MHz (TYP.)	Full Load, 220Vac(TYP.)
		(W)	Vo1(V)	Io1(m A)	Vo2(V)	lo2(m A)	u F	mVp-p	%
1	*FA10-220S3V3C2N3	6.6	3.3	2000	-	-	2000	100	76
	*FA10-220S05C2N3	10	5	2000	-	-	2000	100	78
	*FA10-220S09C2N3	10	9	1111	-	-	1000	120	80
	FA10-220S12C2N3	10	12	833	-	-	1000	120	82
	*FA10-220S15C2N3	10	15	667	-	-	800	120	83
	FA10-220S24C2N3	10.8	24	450	-	-	500	150	84

Note 1: Due to space limitations, above is only a part of our product list, please contact our sales team for more items.

Note 2:."*" is model under developing.

Note 3: The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 4: The fluctuation range of full load efficiency(%,TYP) is ±2%, full load output efficiency= total output power/module's input power.

Input Specification

ltem	Operating Condition	Min.	Тур.	Max.	Unit	
Input Voltage Range	AC Input	85	220	265	VAC	
	DC Input	120	310	380	VDC	
Input Frequency Range	-	47	50	63	Hz	





Innuit Current	115VAC	/	/	0.25		
Input Current	220VAC	/	/	0.15		
Surge Current	115VAC	/	/	10	A	
	220VAC	/	/	20		
Leakage Current	- 0.5mA TYP/2		0.5mA TYP/230V	0VAC/50Hz		
External fuse recommended value	-	2A-3.15A/250VAC slow-fusing (necessary)				
Hot plug	-	Unavailable				
Remote control terminal	-	Unavailable				

Remote control terminal	-		Unavailable				
Output Specification							
ltem	Operatir Conditio	_	Min.	Тур.	Max.	Unit	
	Full input	Vo1	-	±1.0	±2.0	%	
Voltage Accuracy	voltage range Any load	Vo2	-	-	-	%	
Line Demolation	Naminalland	Vo1	-	-	±0.5	%	
Line Regulation	Nominal Load	Vo2	-	-	-	%	
Load Regulation	Nominal input voltage	Vo1	-	-	±1.0	%	
Load Regulation	20%~100% load	Vo2	-	-	-	%	
	Input 115VAC		-	-	0.45	10/	
No load power consumption	Input 220VAC		-	-	0.45	W	
	Single Output		0	-	-	%	
Minimum load	Dual output common grounded		-	-	-	%	
	Dual output isolated		-	-	-		
Turn-on Delay Time	Input 115VAC (full load) Input 220VAC (full load)		-	150	-		
Power-off Holding Time	Input 115VAC (full load)		-	10	-	- mS	
	Input 220VAC (full load)						
Output Dynamic Response	25%~50%~2	-	Overshoot range(%):≤±10			% mS	
	50%~75%~	50%	Recovery time(mS):≤5.0				
Output Overshooting	Full input voltage		≤10%Vo			%	
Short Circuit Protection	range		Continuous, Self-recovery			Hiccup	






Г	Orift Coefficient	-	-	±0.03%	-	%/°C		
Over Current Protection		Input 220VAC	≥130	% Io, Self-recovery	6 Io, Self-recovery			
Gene	ral Specifications							
	Item	Operating Condition	Min.	Тур.	Max.	Unit		
Swi	tching Frequency	-	-	65	-	KHz		
Ope	rating Temperature	-	-40	-	+75	· °C		
Sto	rage Temperature	-	-40	-	+85			
Cald	avia a Tanana avatura	Wave-soldering	260±4°C, timing 5-10S					
5010	ering Temperature	Manual-soldering	360±8°C, timing 4-7S					
R	elative Humidity	-	10	-	90	%RH		
ls	solation Voltage	Input-Output Test 1min, leakage current≤5mA	3000	-	-	VAC		
Insu	ulation Resistance	Input-Output@DC500	100	-	-	ΜΩ		
S	Safety Standard	-	EN60950 \ IEC60950					
	Vibration	-	10-55Hz,10G,30Min,alongX,Y,Z					
Clas	s of Case Material	-		UL94 V-0				
	MTBF	-	MIL-HDBK-217F@25°C>300,000H					
EMC	Characteristics							
	Total Item	Sub Item	Test Standard		Class			
	ENAL.	CE	CISPR22/EN55032	CLASS B (see recommended circuit Photo 1)				
	EMI	RE	CISPR22/EN55032	32 CLASS B (see recommended circ		uit Photo 1)		
		RS	IEC/EN61000-4-3	10V/m Perf.C circuit Photo 1)	criteria B (see reco	ommended		
		CS	IEC/EN61000-4-6	3Vr.m.s Perf.C circuit Photo 1)	riteria B (see red	commended		
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air	±8KV Perf.Criter	а В		
EMC		Surge	IEC/EN61000-4-5	±1KV Perf.C	Criteria B			
	EMS	EFT	IEC/EN61000-4-4	±2KV Perf.C	Criteria B			
		Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%~70% Perf.0	Criteria B			





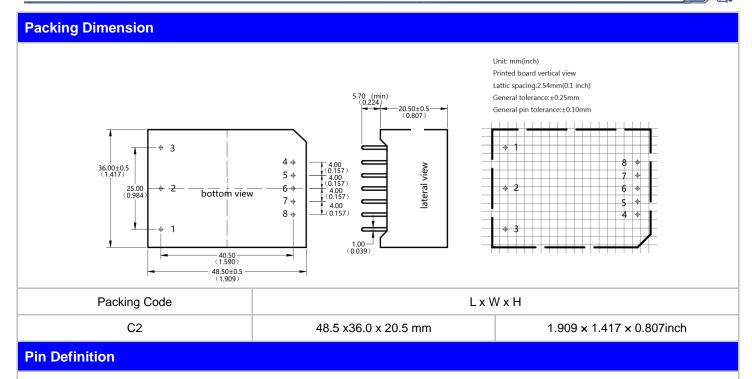


Pin-out	1	2	3	4	8
Single(S)	FG	AC(N)	AC(L)	+Vo	-Vo

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.


Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)


Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern. (2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line, Power line selected from corresponding diameter wire with insulation according to the flow of output current.

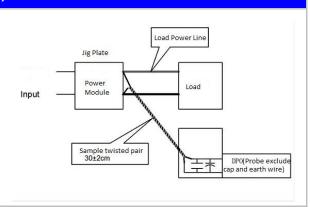

Product Characteristic Curve

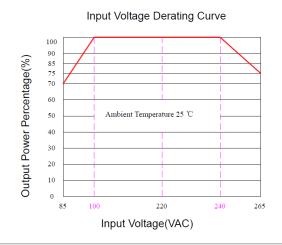

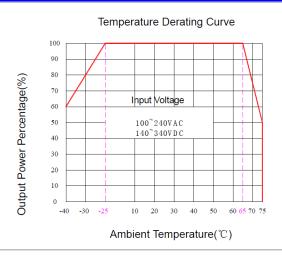





Note

- 1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC/ 240~265VAC/ 120~140VDC/ 340~380VDC.
- 2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.

Typical EMC Circuit and Recommended Specification

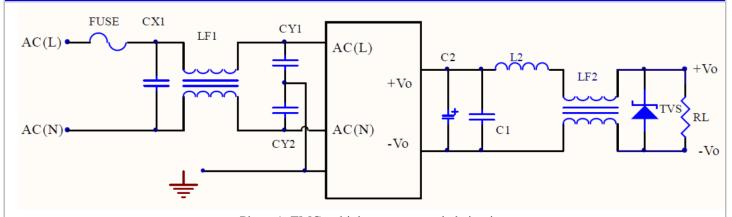


Photo 1: EMC or higher recommended circuit

External Circuit recommended Value:

Components	Components Name	Recommended Value		
FUSE	Fuse	2A/250Vac, slow fusing, necessary		
CX1	X capacitor	0.33uF/275Vac		
CY1/CY2	Y capacitor	102M/400Vac		
L2	DM inductor	6.8uH/2A		
LF1	CM inductor	10mH/0.5A		
LF2	CM inductor	25~50uH/2A		

Note 1:

- 1) C1 choose high frequency low impedance electrolytic capacitor, the capacitance lower than capacitive load, withstand voltage value is above 1.5 times more than output voltage;
- 2) C2 choose 0.1uF ceramic chip capacitor, withstand voltage value is above 1.5 times more than output voltage;
- 3) TVS1 is TVS tube: 5V output recommended: SMBJ7.0A, 9V output recommended: SMBJ12.0A, 12V output recommended: SMBJ20A, 15V output recommended: SMBJ20.0A, 24V output recommended: SMBJ30.0A, 48V output recommended: SMBJ64A.

Note 2:

- 1. The product should be used under the specification range, otherwise it will cause permanent damage to it.
- 2. Product's input terminal should connect to fuse;
- 3.If the product is not worked under the load range(below the minimum load or beyond the load range), we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4.Unless otherwise specified, data in this datasheet are tested under conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
- 5.All index testing methods in this datasheet are based on our Company's corporate standards
- 6. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 7.We can provide customized product service;
- 8. The product specification may be changed at any time without prior notice.