AIPULNION

AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series

Typical Features

- Wide input voltage range:85-265VAC/120-380VDC
- ◆ No-load power consumption≤0.35W
- ◆ Transfer efficiency (typ. 86%)
- ◆ Switching frequency: 65KHz
- Protection: Short Circuit, Over Current
- ◆ Isolation voltage: 4000Vac
- ◆ Pass CE, RoHS certificate
- ◆ Meet IEC62368/UL62368/EN62368 test standard
- ◆ Plastic case, conform to UL94 V-0
- ◆ PCB mounting, chassis mounting, din-rail mounting available



CE RoHS

Application Field

FA15-220SXXF2D4 Series----- a compact size, high efficient, approved by CE, RoHS power converter offered by Aipu. It features universal input voltage, DC and AC dual-use, low ripple, low temperature rise, low power consumption, high efficiency, high reliability, safer isolation, with good EMC performance. EMC and Safety standard meet international EN55032, IEC/EN61000. It widely used in power, industrial, instrument, smart home applications. For harsh EMC environment, the application circuit in the datasheet is strongly recommended.

Typical Product List

Certificate	Model	Output Specification			Max.	Ripple& Noise	Efficiency@ Full Load,
		Power	Voltage	Current	Capacitive Load	20MHz (Max.)	220Vac (TYP.)
		(W)	Vo1(V)	lo1(m A)	u F	mVp-p	%
CE/RoHS	FA15-220S3V3F2D4	10	3.3	3000	2000	80	70
CE/RoHS	FA15-220S05F2D4	15	5	3000	1000	80	74
CE/RoHS	FA15-220S09F2D4	15	9	1667	1000	80	82
CE/RoHS	FA15-220S12F2D4	15	12	1250	800	80	84
CE/RoHS	FA15-220S15F2D4	15	15	1000	800	100	85
-	FA15-220S20F2D4	15	20	750	800	100	85
CE/RoHS	FA15-220S24F2D4	15	24	625	500	100	86

Note 1: Suffix "-T" for chassis mounting, "-TS" suffix for DIN-Rail mounting, DIN-Rail width is 35mm;

Note 2:. The typical output efficiency is based on that product is full loaded and burned-in after half an hour.

Note 3: The fluctuation range of full load efficiency(%,TYP) is ±2%, full load output efficiency= total output power/module's input power.

Input Specification								
ltem	Operating Condition	Min.	Тур.	Max.	Unit			
Input Voltage Range	AC Input	85	220	265	VAC			

Guangzhou Aipu Electron Technology Co., Ltd

Email: market@aipu-elec.com Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.

Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. HOTLINE: 400-811-8032 Website: http://aipulnion-power.com/ tation. Version: A/8 Date: 2021-12-15 Page 1 of 6



AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series

CE RoHS

		DC Input	120	310	380	VDC		
Input Frequency Range		-	47	50	63	Hz		
		115VAC	/	/	0.35			
Input Current		220VAC	/	/	0.25	-		
	_	115VAC	/	/	10	A		
Surge	Current	220VAC	/	/	20			
Leakage	e Current	-	0.5mA TYP/230VAC/50Hz					
	nal fuse nded value	-	1A-2A/250VAC slow-fusing					
Hot	plug	-		Unavailabl	e			
Remote cor	ntrol terminal	-		Unavailabl	e			
Output S	pecification							
lte	em	Operating Condition	Min.	Тур.	Max.	Unit		
Voltage Accuracy		Full input voltage range, Any load	-	±2.0	±3.0	%		
Line Regulation		Nominal Load	-	-	±0.5	%		
Load Regulation		Nominal input Voltage, 20%~100% load	-	-	±1.0	%		
No load power consumption		Input 115VAC	-	-	0.35	W		
		Input 220VAC	-	-	0.55	vv		
Minim	um load	Single Output	0	-	-	%		
Turn-on [Delay Time	Nominal input voltage, full load	-	1000	-	mS		
Power-off Holding Time		Input 220VAC (full load)	-	200 -		mS		
Dynamic Respons e	Over shoot range	25%~50%~25%	-10.0	-	+10.0	%		
	Recovery time	50%~75%~50%	-5.0	-	+5.0	mS		
Output Ov	vershooting	Full input voltage range		%				
Short Circuit Protection		r an input voltage range	Conti	nuous, Self-recovery	Hiccup			
Drift Coefficient		-	-	±0.03%	-	%/°C		
Over Curre	nt Protection	Full input voltage range	≥120% lo, Self-recovery			Hiccup		
Rinnle	& Noise	-	-	50	100	mV		
Ripple & Noise		Note: Ripple& Noise is tested by Twisted Pair Method, details please see Ripple& Noise Test at back.						
General S	Specification	าร						
lte	em	Operating Condition	Min.	Тур.	Max.	Unit		
Switching	Frequency	-	_	65	-	KHz		

 Guangzhou Aipu Electron Technology Co., Ltd
 Add: B

 Email: market@aipu-elec.com
 Tel: 86-20-84206763
 Fax: 86-20-84206762
 H

 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.
 H
 H
 HOTLINE: 400-811-8032

Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. Website: http://aipulnion-power.com/ Version: A/8 Date: 2021-12-15 Page 2 of 6

AIPULNION[®]


AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series


Operating Temperature	-	-40	-	+75	°C		
Storage Temperature	-	-40	-40 -		Ľ		
	Wave-soldering	260±4°C, timing 5-10S					
Soldering Temperature	Manual-soldering	360±8℃, timing 4-7S					
Relative Humidity	-	10	-	90	%RH		
Isolation Voltage	Input-Output,Test 1min, leakage current ≤5mA	4000	-	-	VAC		
Insulation Resistance	Input-Output@DC500V	100	-	-	MΩ		
Safety Standard	-	EN62368、IEC62368					
Vibration	-	10-55Hz,10G,30Min,alongX,Y,Z					
Safety Class	-	CLASSII					
Class of Case Material	-	UL94 V-0					
MTBF	-	MIL-HDBK-217F@25°C>300,000H					

EMC Characteristics

-	Total Item	Sub Item	Test Standard	Class
		CE	CISPR22/EN55032	CLASS B
	EMI	RE	CISPR22/EN55032	CLASS B
	EMS	RS	IEC/EN61000-4-3	10V/m Perf.Criteria B (see recommended circuit Photo 1)
EMC		CS	IEC/EN61000-4-6	3Vr.m.s Perf.Criteria B (see recommended circuit Photo 1)
		ESD	IEC/EN61000-4-2	Contact ±6KV / Air ±8KV Perf.Criteria B
		Surge	IEC/EN61000-4-5	±1KV Perf.Criteria B
		EFT	IEC/EN61000-4-4	±2KV Perf.Criteria B
		Voltage dips and interruptions	IEC/EN61000-4-11	0%~70% Perf.Criteria B

F2 Packing Dimension

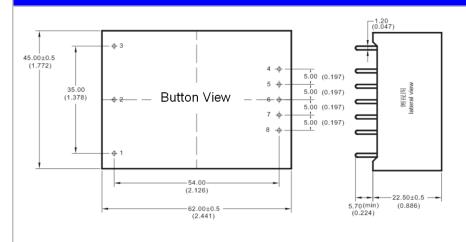



Guangzhou Aipu Electron Technology Co., Ltd Email: market@aipu-elec.com Tel: 86-20-84206763 Fax: 86-20-84206763

Fax: 86-20-84206762 Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation.


Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. HOTLINE: 400-811-8032 Website: http://aipulnion-power.com/ Version: A/8 Date: 2021-12-15 Page 3 of 6



AIPULNION

AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series



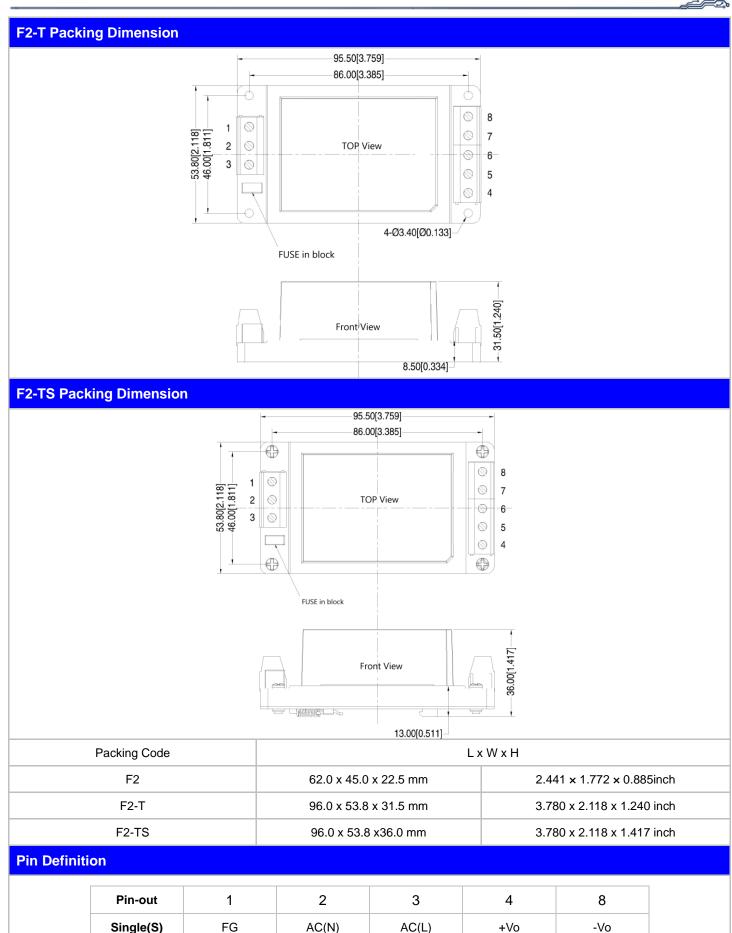

Note: If the definition of pin is not in accordance with the model selection manual, please refer to the label on actual item.

Guangzhou Aipu Electron Technology Co., Ltd

Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. Fax: 86-20-84206762 Email: market@aipu-elec.com Tel: 86-20-84206763 HOTLINE: 400-811-8032 Website: http://aipulnion-power.com/ Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/8 Date: 2021-12-15 Page 4 of 6

AIPULNION

AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series

CE RoHS


Ripple& Noise Test: (Twisted Pair Method 20MHZ bandwidth)

Test Method:

(1) 12# twisted pair to connect, Oscilloscope bandwidth set as 20MHz, 100M bandwidth probe, terminated with 0.1uF polypropylene capacitor and 10uF high frequency low resistance electrolytic capacitor in parallel, oscilloscope set as Sample pattern.

(2) Input terminal connect to power supply, output terminal connect to electronic load through jig plate, Use 30cm±2 cm sampling line. Power line selected from corresponding diameter wire with insulation according to the flow of output current.

Product Characteristic Curve

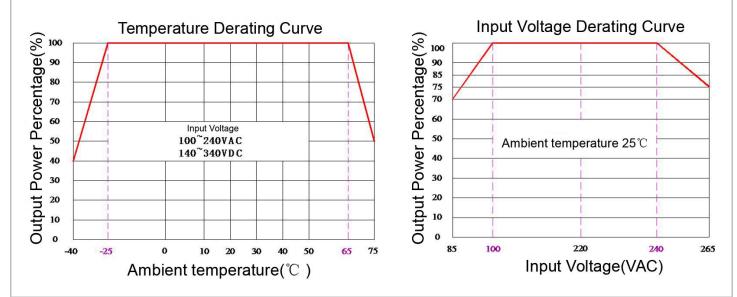


Note

1: Input Voltage should be derated base on Input Voltage Derating Curve when it is 85~100VAC /240~265VAC /120~140VDC /340~380VDC.

2: Our product is suitable to use under natural air cooling environment, if use it under closed condition, please contact with us.


Typical EMC Circuit and Recommended Spec

1. Typical Application Circuit

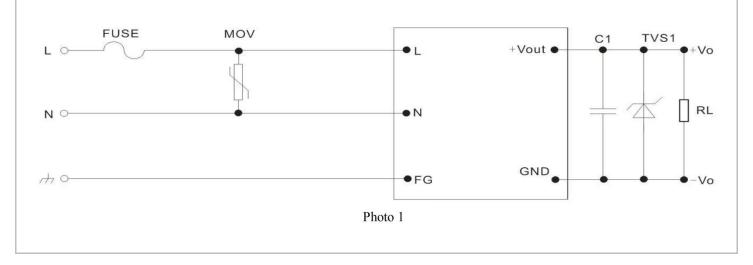

Guangzhou Aipu Electron Technology Co., Ltd Email: market@aipu-elec.com

Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-811-8032 Website: http://aipulnion-power.com/ Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/8 Date: 2021-12-15 Page 5 of 6

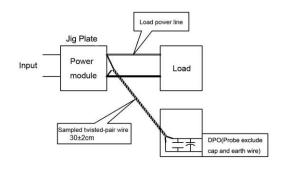




AC/DC Converter FA15-220SXXF2D4(-T)(-TS) Series



Output voltage	5V	9V	12V	15V	24V	48V
TVS tube recommended value	SMBJ7.0A	SMBJ12A	SMBJ20A	SMBJ20A	SMBJ30A	SMBJ64A

Note:

Output capacitor C1 is ceramic capacitor, to filter high frequency noise. TVS tube is a recommend component to protect post-circuit if converter fails. Recommend to external FUSE, Model:2A/250V, slow fusing. Recommend to connect with external MOV voltage dependent resistor, model:14D511K.

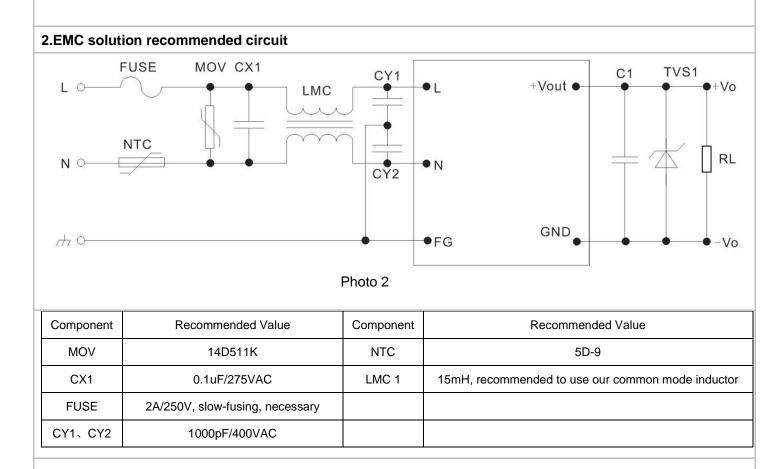

Note :

1. The product should be used under the specification range, otherwise it will cause permanent damage to it.

2.Product's input terminal should connect to fuse;

- 3.If the product is not worked under the load range(below the minimum load or beyond the load range), we cannot ensure that the performance of product is in accordance with all the indexes in this manual;
- 4. Unless otherwise specified, data in this datasheet are tested under conditions of Ta=25°C, humidity<75% when inputting nominal voltage and outputting rated load(pure resistance load);
- 5.All index testing methods in this datasheet are based on our Company's corporate standards
- 6. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model
- products will exceed the above-mentioned requirements, please directly contact our technician for specific information;
- 7.We can provide customized product service;
- 8. The product specification may be changed at any time without prior notice.

Guangzhou Aipu Electron Technology Co., Ltd

Add: Building 4, HEDY Park, No.63, Punan Road, Huangpu Dist, Guangzhou, CN. Email: market@aipu-elec.com Tel: 86-20-84206763 Fax: 86-20-84206762 HOTLINE: 400-811-8032 Website: http://aipulnion-power.com/ Guangzhou Aipu Electron Technology Co., Ltd reserves the copyright and right of final interpretation. Version: A/8 Date: 2021-12-15 Page 6 of 6