


LOW INPUT CURRENT PHOTOCOUPLER

Description

The K1010 Z series consist of an infrared emitting diode, optically coupled to a phototransistor detector. They are packaged in a 4-pin DIP package and available in wide-lead spacing and SMD option.

Schematic



- 1. Anode
- 2. Cathode
- 3. Emitter
- 4. Collector

Features

1. Current transfer ratio

(CTR : Min. 50% at I_F =0.1mA V_{CE} =5V)

2. High isolation voltage between input and output

(Viso: 5000Vrms)

- 3. Pb free and RoHS compliant
- 4. MSL class 1
- 5. Agency Approvals:
 - UL Approved (No. E169586): UL1577
 - c-UL Approved (No. E169586)
 - VDE Approved (No. 101347): DIN EN60747-5-5
 - FIMKO Approved: EN62368-1, EN60601-1
 - CQC Approved: GB8898-2011, GB4943.1-2011

Applications

- System appliances
- Measuring instruments
- Computer terminals
- Programmable controllers
- Medical instruments
- Physical and chemical equipment
- Signal transmission between circuits of different potentials and impedances




LOW INPUT CURRENT **PHOTOCOUPLER**


Outside Dimension

Unit: mm


1.Dual-in-line type.

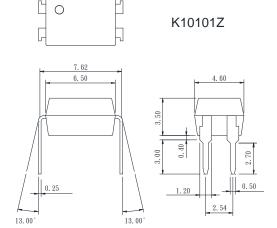


2. Surface mount type. 0

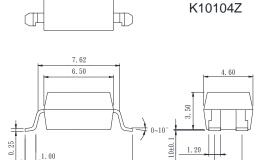


3.Long creepage distance type




4.Long creepage distance for surface mount type.




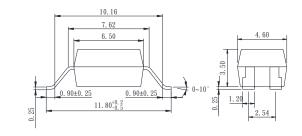

TOLERANCE: ±0.2mm

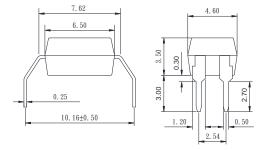

Device Marking



Notes:

cosmo 1010 817 YWW Y: Year code / WW: Week code Z: CTR rank



LOW INPUT CURRENT PHOTOCOUPLER

Absolute Maximum Ratings

(Ta=25°C)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I _F	50	mA
	Peak forward current	I _{FM}	1	Α
	Reverse voltage	V _R	6	V
	Power dissipation	P _D	70	mW
Output	Collector-emitter voltage	V_{CEO}	80	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	50	mA
	Collector power dissipation	Pc	150	mW
Total power dissipation		P _{tot}	200	mW
Isolation voltage 1 minute		V_{iso}	5000	Vrms
Operating temperature		T_{opr}	-55 to +115	℃
Storage temperature		T _{stg}	-55 to +125	$^{\circ}\mathbb{C}$
Soldering temperature 10 seconds		T _{sol}	260	$^{\circ}\mathbb{C}$

• Electro-optical Characteristics

(Ta=25°℃)

Parameter		Symbol	Conditions	Min.	Тур.	Max.	Unit
Input	Forward voltage	V _F	I _F =20mA	-	1.2	1.8	V
	Peak forward voltage	V_{FM}	I _{FM} =0.5A	-	-	3.0	V
	Reverse current	I _R	V _R =4V	-	-	10	μ A
	Terminal capacitance	Ct	V=0, f=1KHz	-	30	-	pF
Output	Collector dark current	I _{CEO}	V _{CE} =20V, I _F =0	-	-	0.1	μ A
Transfer charac- teristics	Current transfer ratio	CTR	I _F =0.1mA, V _{CE} =5V	50	-	600	%
	Collector-emitter saturation	V _{CE(sat)}	I _F =20mA, I _C =1mA	-	0.1	0.2	V
	Isolation resistance	R _{iso}	DC500V	5x10 ¹⁰	10 ¹¹	-	Ω
	Floating capacitance	C _f	V=0, f=1MHz	-	0.6	1.0	pF
	Cut-off frequency	f _C	V_{CC} =5V, I_C =2mA, R_L =100 Ω	-	80	-	KHz
	Response time (Rise)	t _r	V_{CE} =2V, I_C =2mA, R_L =100 Ω	-	4	18	μ s
	Response time (Fall)	t _f	VCE=2 V, IC=2IIIA, KL=10012	-	3	18	μ s

PHOTOCOUPLER



Fig.1 Current Transfer Ratio vs. Forward Current

Classification table of current transfer ratio is shown below.

K1010 Z Model No.	CTR (%)
K1010 ZA	100 ~ 600
K1010 ZE	50 ~ 600

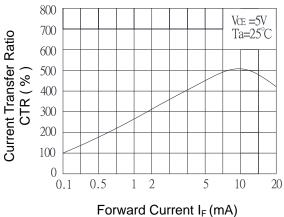


Fig.2 Collector Power Dissipation vs. Ambient Temperature

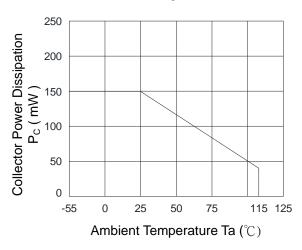


Fig.3 Collector Dark Current vs. Ambient Temperature

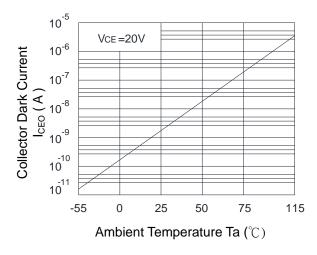


Fig.4 Forward Current vs. Ambient Temperature


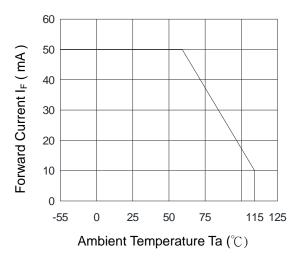


Fig.5 Forward Current vs. Forward Voltage



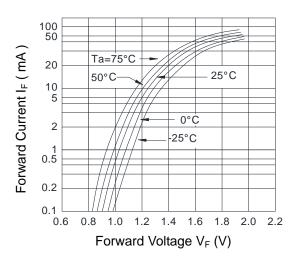

LOW INPUT CURRENT **PHOTOCOUPLER**

Fig.6 Collector Current vs. Collector-Emitter Voltage

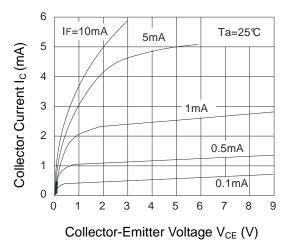


Fig.8 Collector-Emitter Saturation Voltage vs. Ambient Temperature

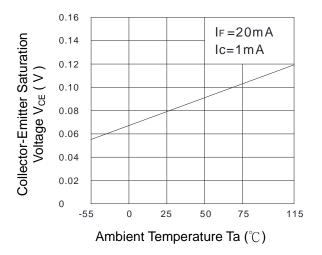


Fig.10 Response Time (Rise) vs. Load Resistance

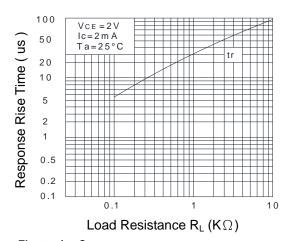


Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature



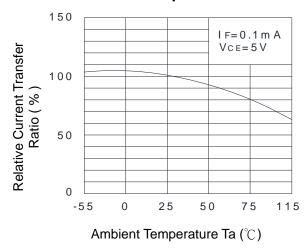


Fig.9 Collector-Emitter Saturation Voltage vs. Forward Current

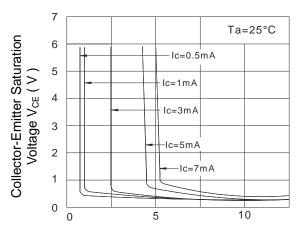

Forward Current I_F (mA)

Fig.11 Response Time (Fall) vs. Load Resistance

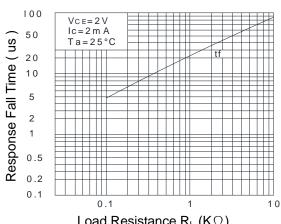


Load Resistance $R_L(K\Omega)$

http://www.cosmo-ic.com

LOW INPUT CURRENT PHOTOCOUPLER

Test Circuit for Response Time

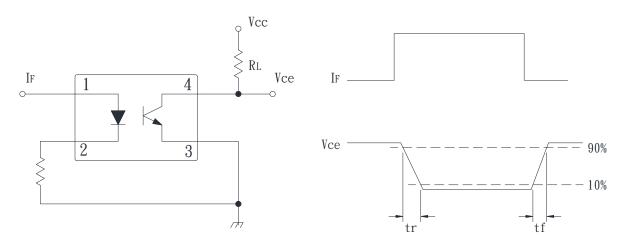



LOW INPUT CURRENT PHOTOCOUPLER

Recommended Soldering Conditions

(a) Infrared reflow soldering:

■ Peak reflow soldering : 260°C or below (package surface temperature)

■ Time of peak reflow temperature : 10 sec
 ■ Time of temperature higher than 230°C : 30-60 sec
 ■ Time to preheat temperature from 180~190°C : 60-120 sec


■ Time(s) of reflow: Two

■ Flux: Rosin flux containing small amount of chlorine (The

flux with a maximum chlorine content of 0.2 Wt% is

recommended.)

Recommended Temperature Profile of Infrared Reflow

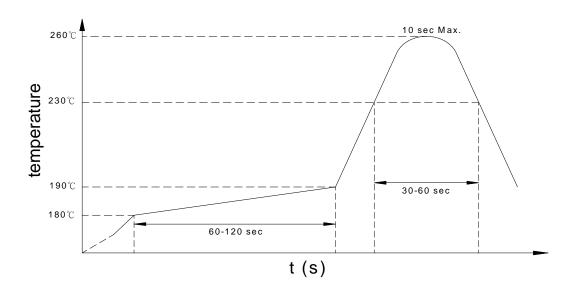

(b) Wave soldering:

■ Temperature : 260°C or below (molten solder temperature)

■ Time : 10 seconds or less

■ Preheating conditions : 120°C or below (package surface temperature)

■ Time(s) of reflow : One

■ Flux: Rosin flux containing small amount of chlorine (The flux with a maximum

chlorine content of 0.2 Wt% is recommended.)

(c) Cautions:

Fluxes: Avoid removing the residual flux with freon-based and chlorine-based

cleaning solvent.

Avoid shorting between portion of frame and leads.



Numbering System

K1010 <u>X</u> Z <u>Y</u> (Z)

Notes:

K1010 Z = Part No.

X = Lead form option (1,3,4,6)

Y = CTR rank option (A,E)

Z = Tape and reel option (TLD,TRU)

Option	Description	Packing quantity	
4 (TLD)	surface mount type package + TLD tape & reel option	2000 units per reel	
4 (TRU)	surface mount type package + TRU tape & reel option	2000 units per reel	
6 (TLD)	long creepage distance for surface mount type package + TLD tape & reel option	2000 units per reel	
6 (TRU)	long creepage distance for surface mount type package + TRU tape & reel option	2000 units per reel	

• Recommended Pad Layout for Surface Mount Lead Form

1. Surface mount type.

4 pin SMD

1.60

+ 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60

- 1.60


- 1.60

- 1.60

- 1.60

- 1.6


2.Long creepage distance for surface mount type.

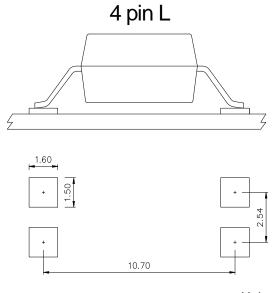

Unit: mm




• 4-pin SMD Carrier Tape & Reel

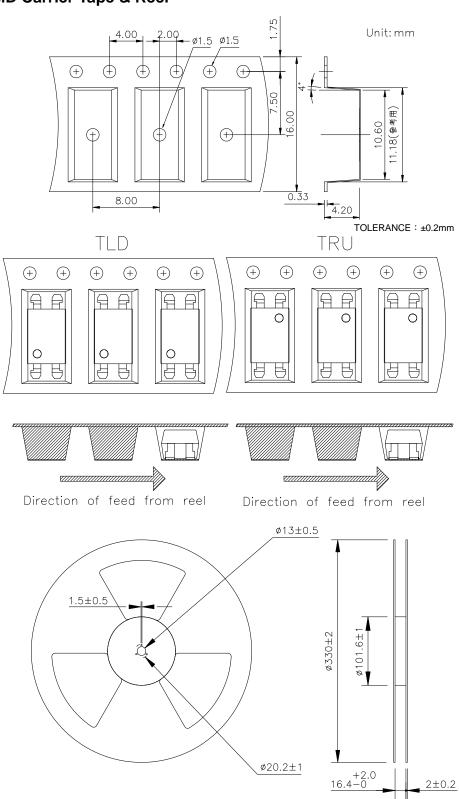



• 4-pin L Carrier Tape & Reel

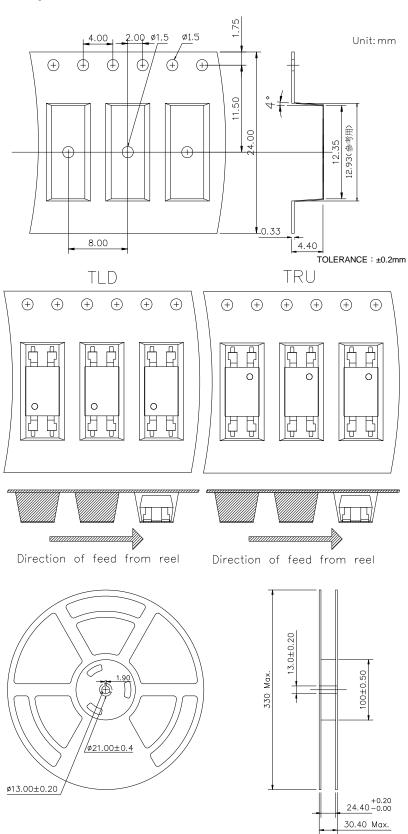



K1010 Z Series LOW INPUT CURRENT PHOTOCOUPLER

Application Notice

The statements regarding the suitability of products for certain types of applications are based on cosmo's knowledge of general applications of cosmo products. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to verify the specifications are suitable for use in a particular application. Customers are solely responsible for all aspects of their own product design or applications. The parameters provided in the datasheet may vary in different applications and performance may vary over time. All operating parameters (including typical parameters) must be validated by customer's technical experts for different applications. cosmo assumes no liability for customer' product design or applications. Product specifications do not expand or otherwise change cosmo's terms and conditions of purchase, including but not limited to the warranty expressed therein.

When using cosmo products, please comply with safety standards and instructions. cosmo has no liability and responsibility to the damage caused by improper use of the instructions specified in the specifications.

cosmo products are designed for use in general electronic equipment such as telecommunications, office automation equipments, personal computers, test and measurement equipments, consumer electronics, industrial control, instrumentation, audio, video.

cosmo devices shall not be used in equipment that requires higher level of reliability and safety, such as nuclear power control equipment, telecommunication equipment(trunk lines), space application, medical and other life supporting equipments, and equipment for aircraft, military, automotive or any other application that can cause human injury or death.

cosmo reserves the right to change the specifications, data, characteristics, structure, materials and other contents at any time without notice. Please contact cosmo to obtain the latest specification.

cosmo disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.